

Schottky Barrier Rectifiers

Using the Schottky Barrier principle with a Refractory metal capable of high temperature operation metal. The proprietary barrier technology allows for reliable operation up to 175 °C junction temperature. Typical application are in switching Mode Power Supplies such as adaptors, DC/DC converters, free-wheeling and polarity protection diodes.

- * Low Forward Voltage.
- * Low Switching noise.
- * High Current Capacity
- * Guarantee Reverse Avalanche.
- * Guard-Ring for Stress Protection.
- * Low Power Loss & High efficiency.
- * 175 °C Operating Junction Temperature
- * Low Stored Charge Majority Carrier Conduction.
- * Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O
- * ESD: 4KV(Min.) Human-Body Model




* In compliance with EU RoHs 2002/95/EC directives

SCHOTTKY BARRIER RECTIFIERS

**20 AMPERES
150 VOLTS**



TO-220AB

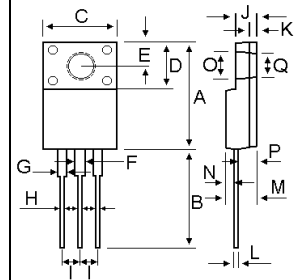

DIM	MILLIMETERS	
	MIN	MAX
A	15.05	15.15
B	13.35	13.45
C	10.00	10.10
D	6.55	6.65
E	2.65	2.75
F	1.55	1.65
G	1.15	1.25
H	0.55	0.65
I	2.50	2.60
J	3.00	3.20
K	1.10	1.20
L	0.55	0.65
M	4.40	4.60
N	1.15	1.25
O	3.35	3.45
P	2.65	2.75
Q	3.15	3.25

MAXIMUM RATINGS


Characteristic	Symbol	MBRF20150CL	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	150	V
RMS Reverse Voltage	$V_{R(RMS)}$	105	V
Average Rectifier Forward Current (per diode) Total Device (Rated V_R), $T_C=125$	$I_{F(AV)}$	10 20	A
Peak Repetitive Forward Current (Rate V_R , Square Wave, 20kHz)	I_{FM}	20	A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfwave, single phase, 60Hz)	I_{FSM}	150	A
Operating and Storage Junction Temperature Range	T_J , T_{stg}	-65 to +175	

THERMAL RESISTANCES

Typical Thermal Resistance junction to case	$R_{\theta jc}$	3.6	/w
---	-----------------	-----	----

ELECTRIAL CHARACTERISTICS

Characteristic	Symbol	MBRF20150CL			Unit
Maximum Instantaneous Forward Voltage (per diode) ($I_F=0.1$ Amp $T_C=25$) ($I_F=1.0$ Amp $T_C=25$) ($I_F=2.5$ Amp $T_C=25$) ($I_F=5$ Amp $T_C=25$) ($I_F=10$ Amp $T_C=25$)	V_F	Min	Typ	Max	V
		---	0.29	0.35	
		---	0.47	0.51	
		---	0.65	0.69	
		---	0.81	0.85	
		---	0.92	0.95	
Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C=25$) (Rated DC Voltage, $T_C=125$)	I_R	0.08 10			mA



Common Cathode
Suffix "C"

MBRF20150CL

FIG-1 FORWARD CURRENT DERATING CURVE

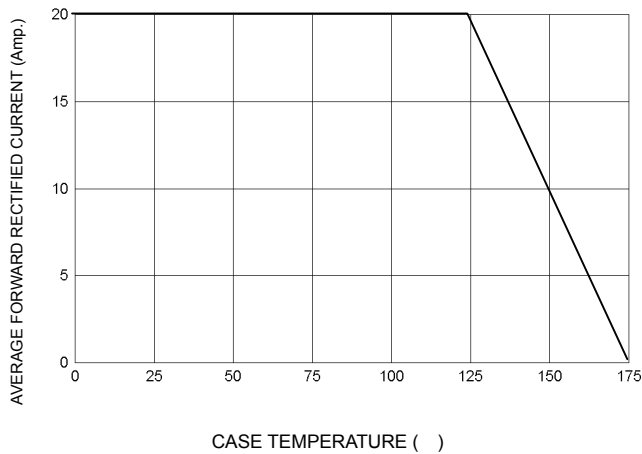


FIG-2 TYPICAL FORWARD CHARACTERISTICS

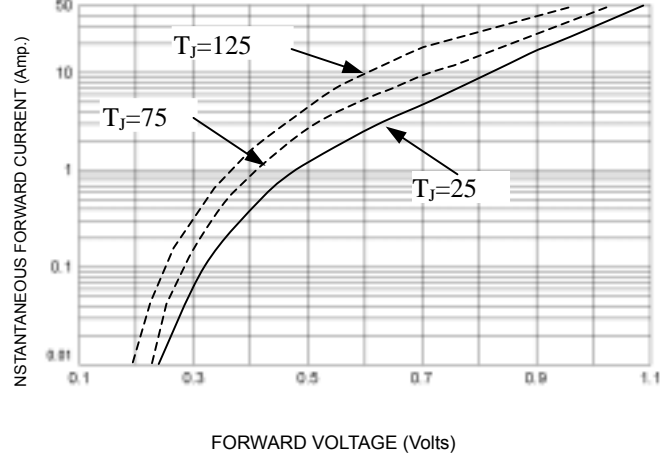


FIG-3 TYPICAL REVERSE CHARACTERISTICS

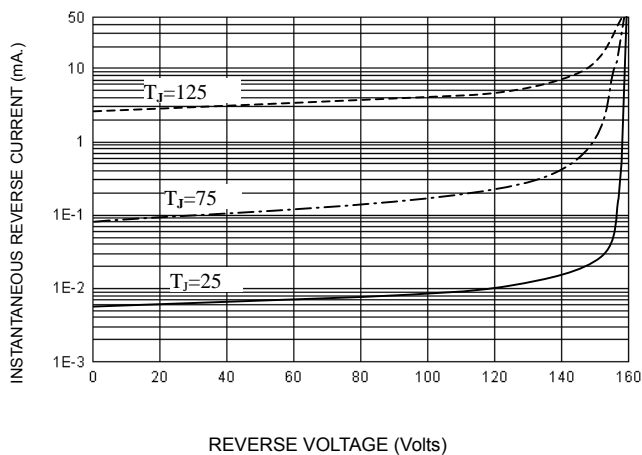


FIG-4 TYPICAL JUNCTION CAPACITANCE

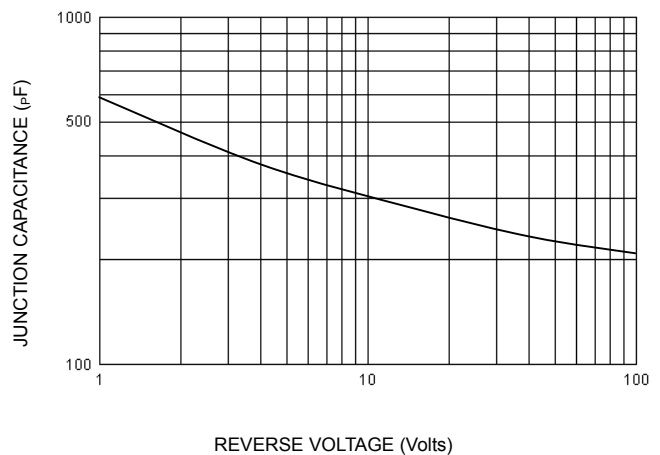


FIG-5 PEAK FORWARD SURGE CURRENT

