

DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

...designed for general-purpose amplifier and low speed switching applications

FEATURES:


- * Collector-Emitter Sustaining Voltage-
 $V_{CE(SUS)}$ = 45 V (Min) - BDX53, BDX54
 = 60 V (Min) - BDX53A, BDX54A
 = 80 V (Min) - BDX53B, BDX54B
 = 100 V (Min) - BDX53C, BDX54C
- * Monolithic Construction with Built-in Base-Emitter Shunt Resistor

NPN	PNP
BDX53	BDX54
BDX53A	BDX54A
BDX53B	BDX54B
BDX53C	BDX54C


8 AMPERE
DARLINGTON
COMPLEMENTARY SILICON
POWER TRANSISTORS
45-100 VOLTS
60 WATTS

MAXIMUM RATINGS

Characteristic	Symbol	BDX53 BDX54	BDX53A BDX54A	BDX53B BDX54B	BDX53C BDX54C	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	100	V
Collector-Base Voltage	V_{CBO}	45	60	80	100	V
Emitter-Base Voltage	V_{EBO}	5.0				V
Collector Current - Continuous Peak	I_C I_{CM}	8.0 12				A
Base Current	I_B	0.2				A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	60 0.48				W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +150				$^\circ\text{C}$



TO-220




PIN 1.BASE
2.COLLECTOR
3.EMITTER
4.COLLECTOR(CASE)

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	2.08	$^\circ\text{C/W}$

FIGURE -1 POWER DERATING

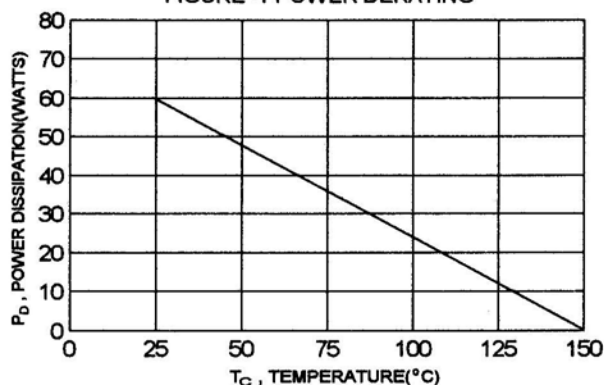

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	16.00
B	9.78	10.42
C	5.02	6.60
D	13.00	14.62
E	3.10	4.19
F	2.41	2.67
G	1.10	1.67
H	0.69	1.01
I	3.21	4.98
J	1.14	1.40
K	2.20	3.30
L	0.28	0.61
M	2.48	3.00
O	3.50	4.00

ELECTRICAL CHARACTERISTICS ($T_C = 25^{\circ}\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage(1) ($I_C = 100\text{ mA}$, $I_B = 0$)	BDX53, BDX54 BDX53A, BDX54A BDX53B, BDX54B BDX53C, BDX54C	$V_{CEO(sus)}$	45 60 80 100	V
Collector Cutoff Current ($V_{CE} = 22\text{ V}$, $I_B = 0$) ($V_{CE} = 30\text{ V}$, $I_B = 0$) ($V_{CE} = 40\text{ V}$, $I_B = 0$) ($V_{CE} = 50\text{ V}$, $I_B = 0$)	BDX53, BDX54 BDX53A, BDX54A BDX53B, BDX54B BDX53C, BDX54C	I_{CEO}	0.5 0.5 0.5 0.5	mA
Collector-Base Cutoff Current ($V_{CB} = \text{Rated } V_{CB}$, $I_E = 0$)		I_{CBO}	200	μA
Emitter-Base Cutoff Current ($V_{EB} = 5.0\text{ V}$, $I_C = 0$)		I_{EBO}	2.0	mA


ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 3.0\text{ A}$, $V_{CE} = 3.0\text{ V}$)	h_{FE}	750		
Collector-Emitter Saturation Voltage ($I_C = 3.0\text{ A}$, $I_B = 12\text{ mA}$)	$V_{CE(sat)}$		2.0	V
Base-Emitter Saturation Voltage ($I_C = 3.0\text{ A}$, $I_B = 12\text{ mA}$)	$V_{BE(sat)}$		2.5	V
Diode Forward-Voltage ($I_F = 3.0\text{ A}$)	V_F		2.5	V


(1) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$

INTERNAL SCHEMATIC DIAGRAM

BDX53 Series NPN




BDX54 Series PNP




BDX53,A,B,C NPN / BDX54,A,B,C PNP

NPN BDX53,A,B,C


COLLECTOR SATURATION REGION

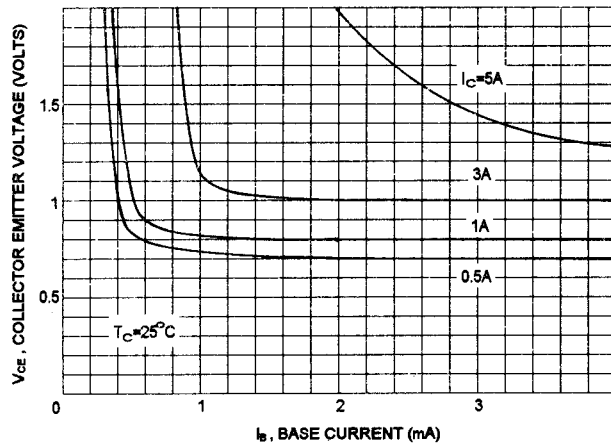

SWITCHING TIME

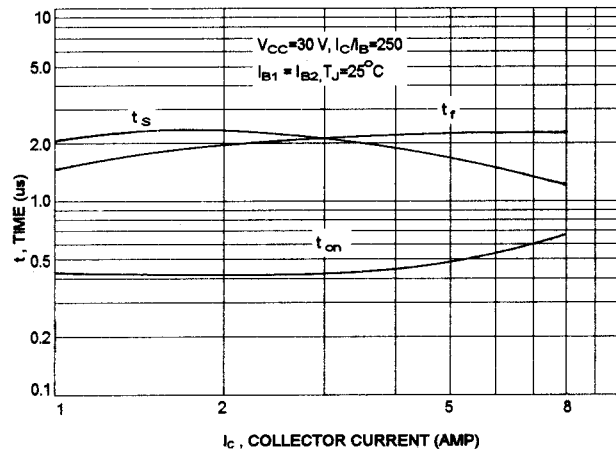


SAFE OPERATING AREA

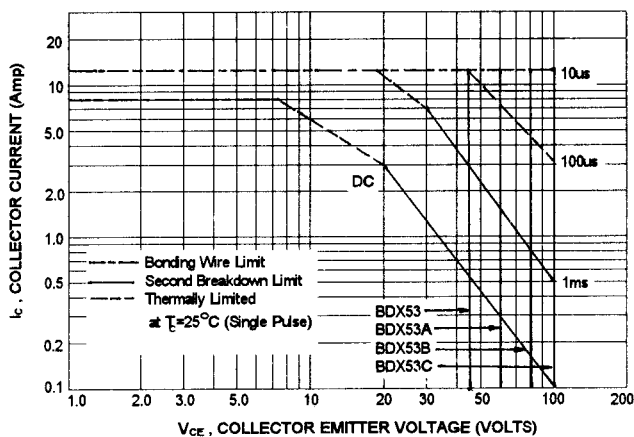


PNP BDX54,A,B,C


COLLECTOR SATURATION REGION

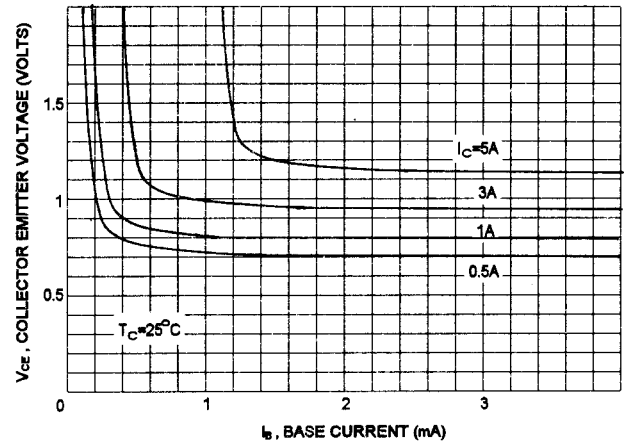


SWITCHING TIME

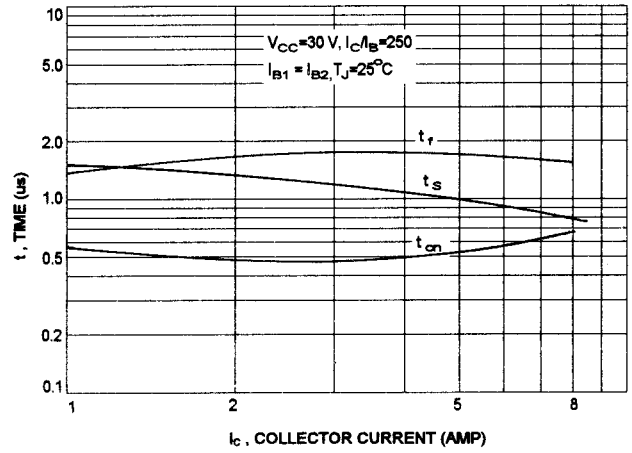


SAFE OPERATING AREA

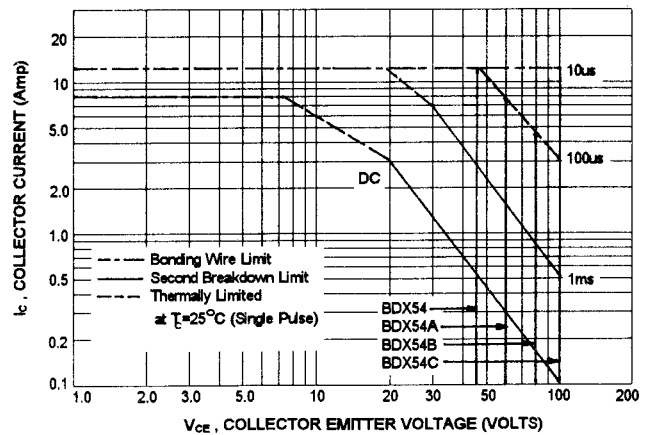


DC CURRENT GAIN

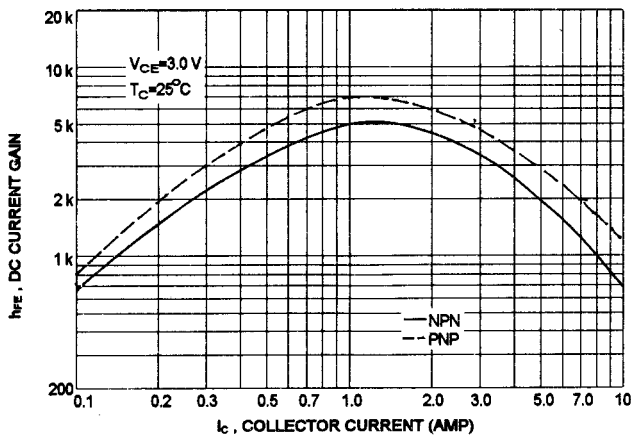


$I_C - V_{BE}$

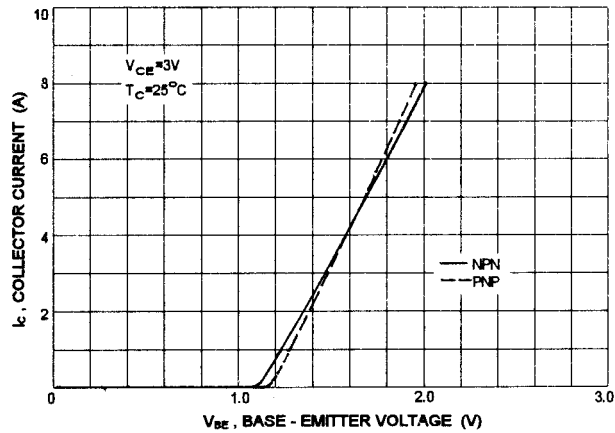


SMALL SIGNAL CURRENT GAIN

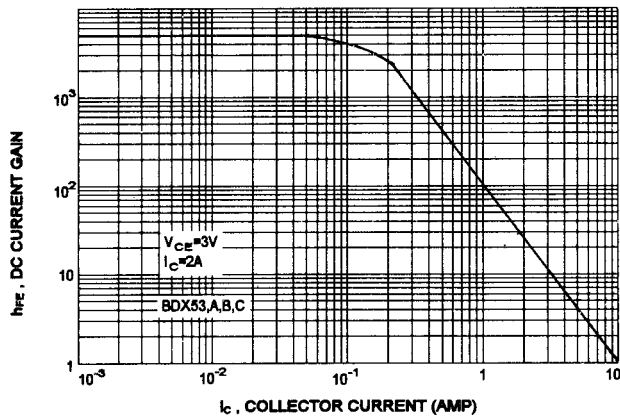


SMALL SIGNAL CURRENT GAIN

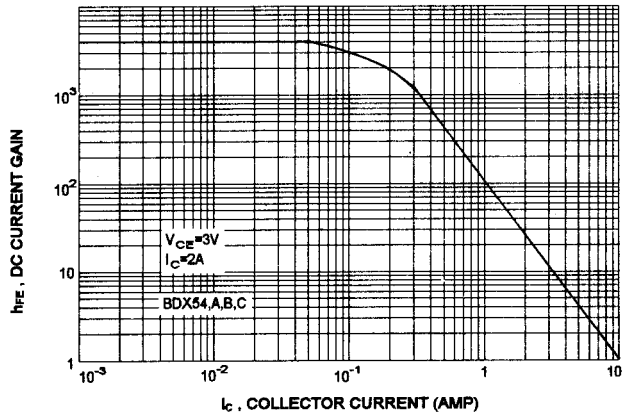

$V_{CE(sat)} - I_C$

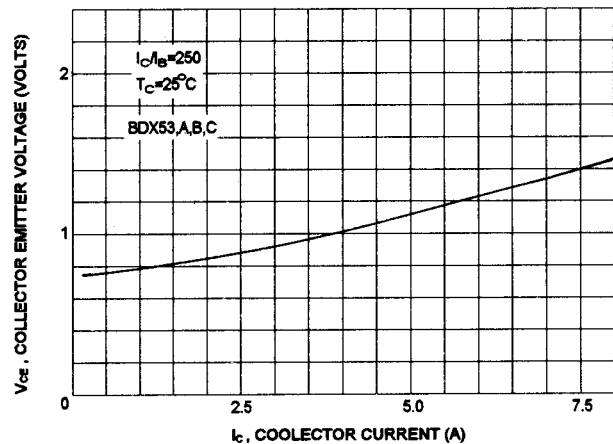

$V_{CE(sat)} - I_C$

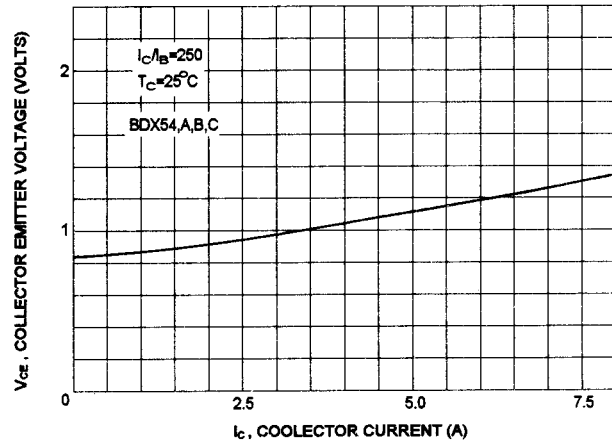

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)