


6.0A GLASS PASSIVATED BRIDGE RECTIFIER

FEATURES

- * Glass Passivated Die Construction
- * Low Forward Voltage Drop
- * High Current Capability
- * High Reliability
- * High Surge Current Capability

MECHANICAL DATA

- * Case: Molded Plastic
- * Epoxy: UL94V-O rate flame retardant
- * Terminals : Plated Leads Solderable
Per MIL-STD-202 Method 208
- * Polarity : As Marking on Body
- * Mounting Position: Any
- * Weight : 4.0 gram (approx.)
- * Marking:Type Number

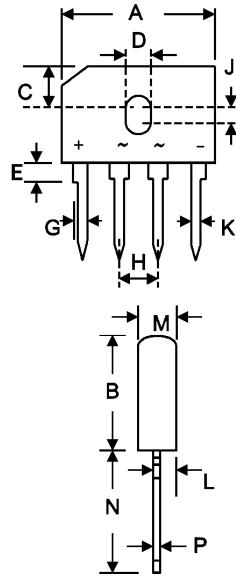

GBU		
Dim	Min	Max
A	21.80	22.30
B	18.30	18.80
C	7.40	7.90
D	3.50	4.10
E	1.52	2.03
G	2.16	2.54
H	4.83	5.33
J	1.65	2.16
K	1.02	1.27
L	0.76	1.02
M	3.30	3.56
N	17.50	18.00
P	0.46	0.56
Unit :mm		

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- * Rating at 25 °C ambient temperature unless otherwise specified
- * Single phase, half wave, 60Hz, resistive or inductive load.
- * For capacitive load derate current by 20 %

Characteristic	Symbol	GBU6A	GBU6B	GBU6D	GBU6G	GBU6J	GBU6K	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	200	400	600	800	V
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	V
Average Rectifier Forward Current @ $T_C=100$	$I_{O(AV)}$	6.0						A
Non-Repetitive Peak Surge Current 8.3 ms Single half sine-wave superimposed on rated load	I_{FSM}	175						A
Forward Voltage (per element) ($I_F=2.0$ Amp)	V_{FM}	1.0						V
Peak Reverse Current (Rated DC Voltage, $T_C = 25$) (Rated DC Voltage, $T_C = 100$)	I_R	5.0 500						μ A
$I^2 t$ Rating for Fusing($t<8.35MS$)	$I^2 t$	127						A^2s
Typical Thermal Resistance (per leg)(note 1)	$R_{\theta JA}$	8.6						k/W
Typical Thermal Resistance (per leg)(note 2)	$R_{\theta JC}$	3.1						k/W
Operating and Storage Temperature Range	T_J, T_{stg}	-65 to +150						

Note: 1. Thermal resistance junction to ambient, mounted on PCB at 9.5mm lead length with 12 mm² copper pads.
2. Thermal resistance junction to case, mounted on 5.0×4.0×0.8 cm thick AL plate.

GBU6A thru GBU6K

FIG-1 FORWARD CURRENT DERATING CURVE

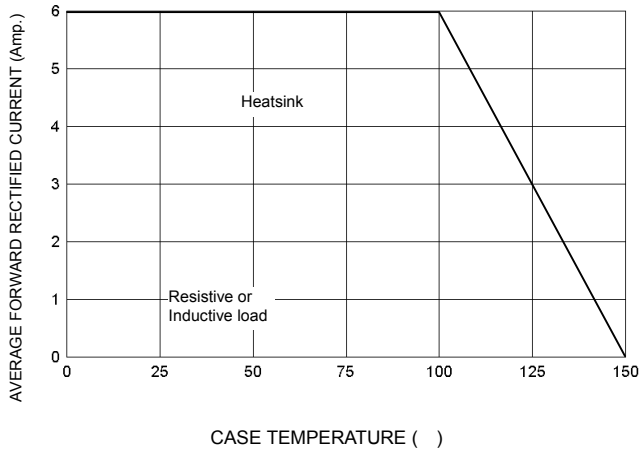


FIG-2 TYPICAL FORWARD CHARACTERISTICS

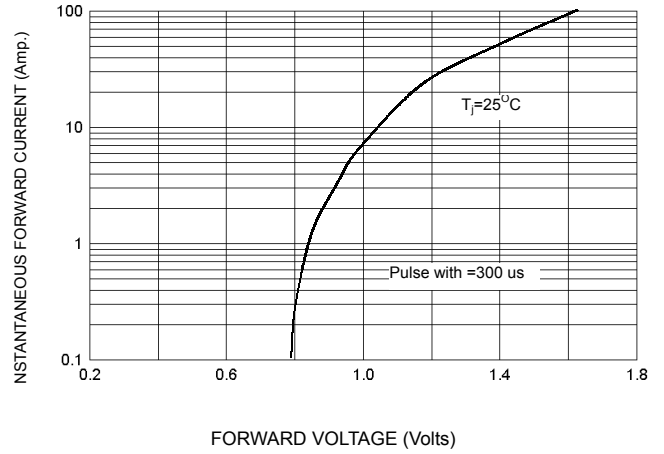


FIG-3 PEAK FORWARD SURGE CURRENT


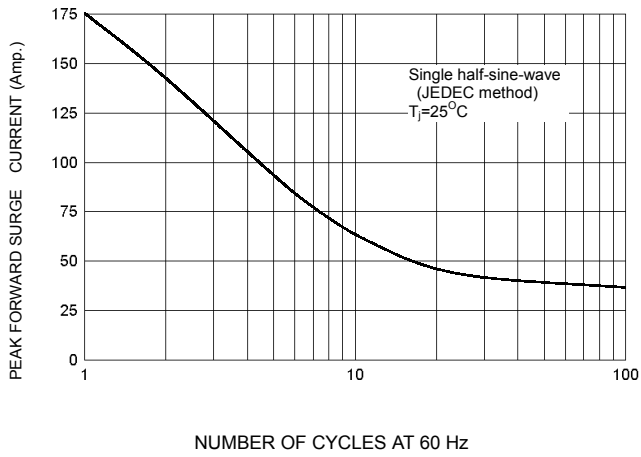


FIG-4 TYPICAL JUNCTION CAPACITANCE

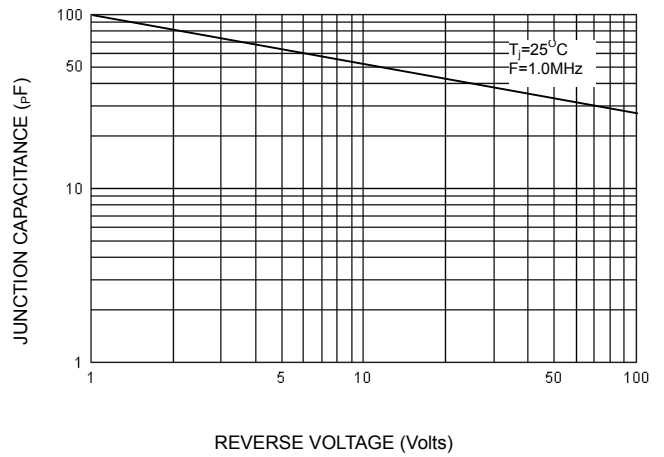

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)