

SWITCHMODE SERIES NPN SILICON POWER TRANSISTORS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications. The MJ16008 is a selected high-gain version of the MJ16006 for applications where drive current is limited

Typical Applications:

- * Switching Regulators
- * Inverters
- * Solenoid and Relay Drives
- * Motor Controls
- * Deflection Circuits

Features:

- * Fast Turn-Off Times
- * Operating Temperature Range - 65 to +200°C
- * 100°C Performance Specified for:
 - Reverse-Biased SOA With Inductive Loads
 - Switching Times With Inductive Loads
 - Saturation Voltages
 - Leakage Currents

MAXIMUM RATINGS


Characteristic	Symbol	MJ16002	MJ16004	Unit
Collector-Emitter Voltage	V_{CEO}	450	450	V
Collector-Emitter Voltage	V_{CEV}	850	850	V
Emitter-Base Voltage	V_{EBO}	6.0		V
Collector Current - Continuous - Peak	I_C I_{CM}	5.0 10		A
Base Current-Continuous -Peak	I_B I_{BM}	4.0 6.0		A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ @ $T_C = 100^\circ\text{C}$ Derate above 25°C	P_D	125 71.5 0.714		W W/°C
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +200		°C

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.4	°C/W

NPN
MJ16002
MJ16004

5 AMPERE
SILICON POWER
TRANSISTORS
450 VOLTS
125 WATTS



TO-3



PIN 1. BASE
2. EMITTER
COLLECTOR (CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.20	26.67
F	0.92	1.09
G	1.38	1.62
H	29.90	30.40
I	16.64	17.30
J	3.88	4.36
K	10.67	11.18

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage(1) ($I_C = 100\text{ mA}$, $I_B = 0$)	$V_{CEO(sus)}$	450		V
Collector Cutoff Current ($V_{CE} = 850\text{ V}$, $V_{BE(om)} = 1.5\text{ V}$) ($V_{CE} = 850\text{ V}$, $V_{BE(om)} = 1.5\text{ V}$, $T_c = 100^\circ\text{C}$)	I_{CEV}		0.25 1.5	mA
Collector Cutoff Current ($V_{CE} = 850\text{ V}$, $R_{BE} = 50\Omega$, $T_c = 100^\circ\text{C}$)	I_{CER}		2.5	mA
Emitter Cutoff Current ($V_{EB} = 6.0\text{ V}$, $I_C = 0$)	I_{EBO}		1.0	mA

ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 5.0\text{ A}$, $V_{CE} = 5.0\text{ V}$)	MJ16002 MJ16004	h_{FE}	5.0 7.0	
Collector-Emitter Saturation Voltage ($I_C = 1.5\text{ A}$, $I_B = 0.2\text{ A}$) ($I_C = 1.5\text{ A}$, $I_B = 0.15\text{ A}$) ($I_C = 3.0\text{ A}$, $I_B = 0.4\text{ A}$) ($I_C = 3.0\text{ A}$, $I_B = 0.3\text{ A}$)	MJ16002 MJ16004 MJ16002 MJ16004	$V_{CE(sat)}$		1.0 1.0 2.5 2.5
Base-Emitter Saturation Voltage ($I_C = 3.0\text{ A}$, $I_B = 0.4\text{ A}$) ($I_C = 3.0\text{ A}$, $I_B = 0.3\text{ A}$)	MJ16002 MJ16004	$V_{BE(sat)}$		1.5 1.5

DYNAMIC CHARACTERISTICS

Output Capacitance ($V_{CB} = 10\text{ V}$, $I_E = 0$, $f = 1.0\text{ KHz}$)	C_{ob}		250	pF
---	----------	--	-----	----

SWITCHING CHARACTERISTICS

Delay Time	$V_{CC} = 250\text{ V}$, $I_C = 3\text{ A}$	$I_{B1} = -I_{B2} = 0.8\text{ A}$	t_d		100	ns
Rise Time	$R_{BE} = 8.0\Omega$	MJ16002	t_r		300	ns
Storage Time	$P_W = 30\text{ us}$	$I_{B1} = -I_{B2} = 0.6\text{ A}$	t_s		3000	ns
Fall Time	Duty Cycle $\leq 2.0\%$	MJ16004	t_f		350	ns

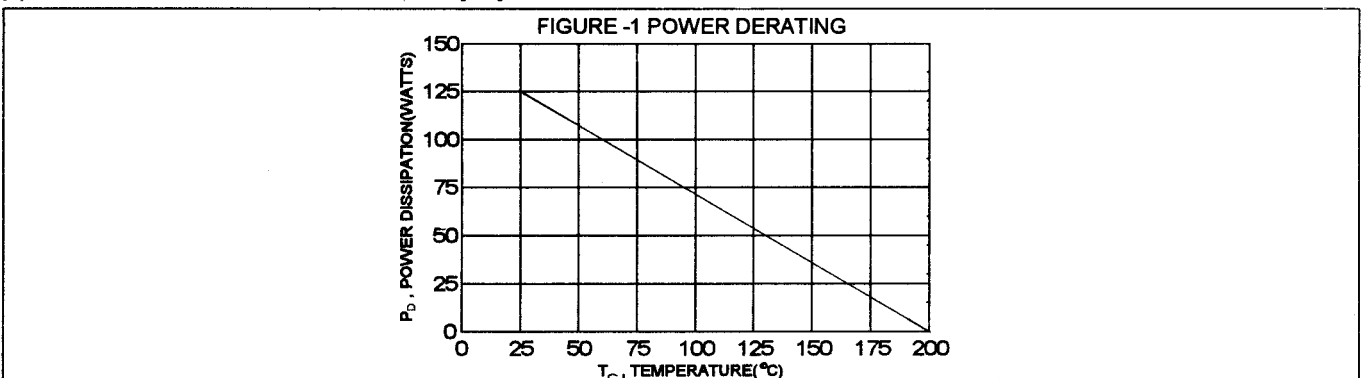
(1) Pulse Test: Pulse Width $\leq 300\text{ us}$, Duty Cycle $\leq 2\%$ 

FIG-2 DC CURRENT GAIN

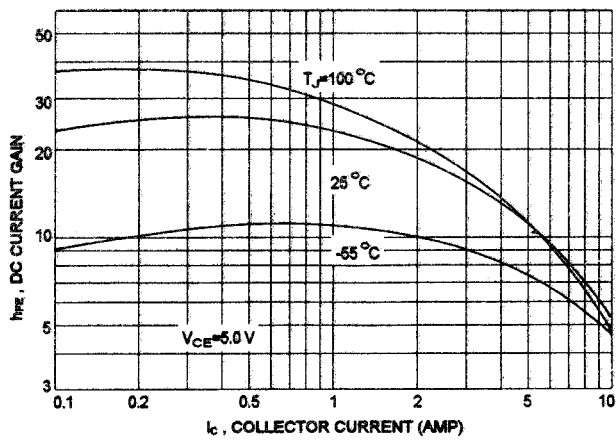


FIG-3 COLLECTOR SATURATION REGION

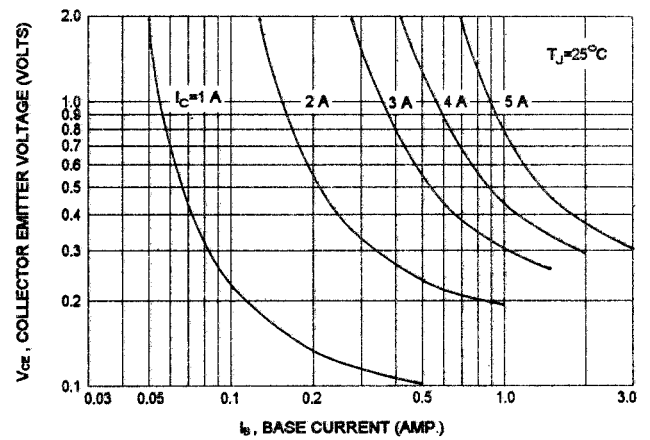


FIG-4 COLLECTOR-EMITTER SATURATION VOLTAGE

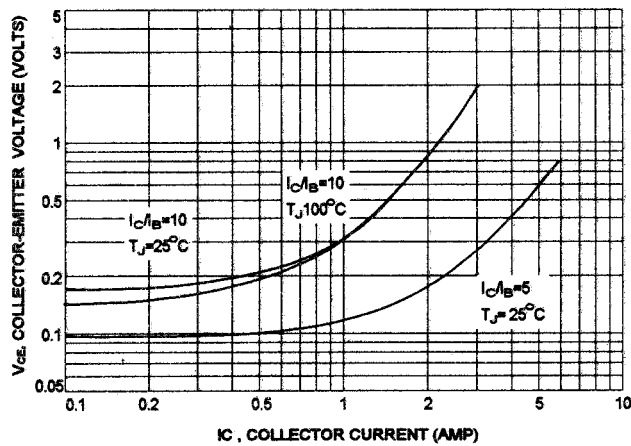


FIG-5 BASE-EMITTER SATURATION VOLTAGE

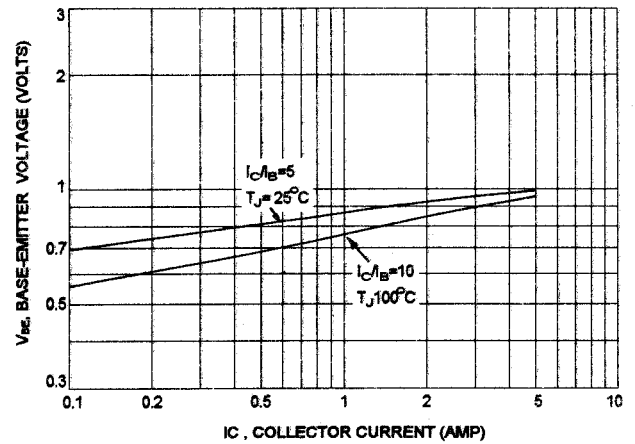


FIG-6 COLLECTOR CUT-OFF REGION

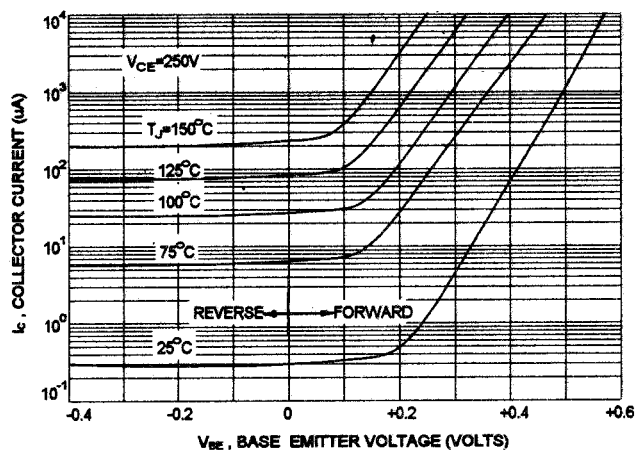


FIG-7 CAPACITANCES


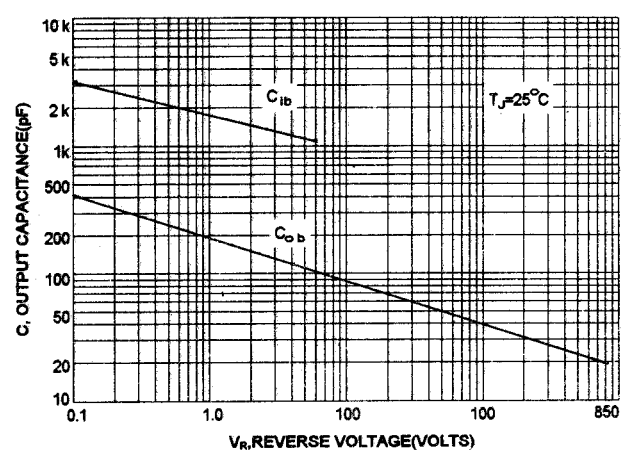


FIG-8 FORWARD BIAS SAFE OPERATING AREA

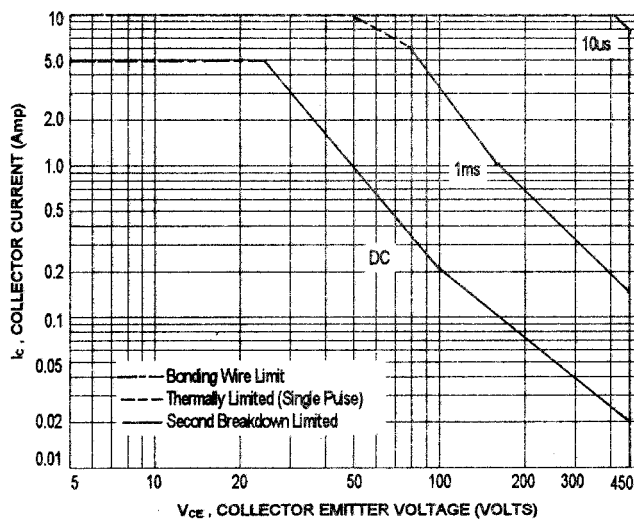


FORWARD BIAS

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of FIG-8 is base on $T_{J(PK)} = 200^\circ\text{C}$; T_C is variable depending on conditions. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIG-9 REVERSE BIAS SAFE OPERATING AREA

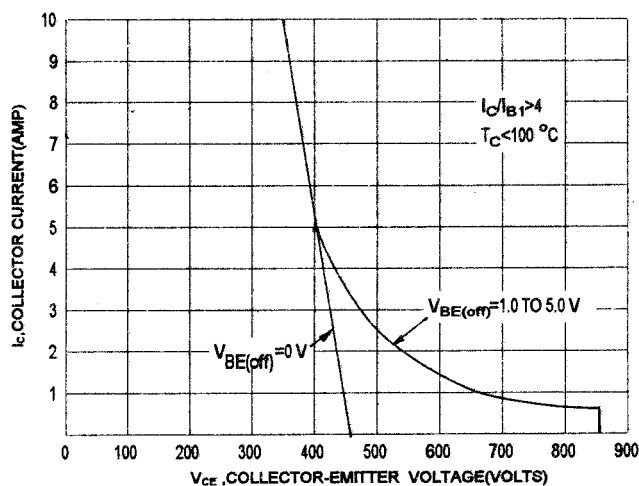

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. the safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. FIG-9 gives the RBSOA characteristics.

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)