

COMPLEMENTARY SILICON POWER TRANSISTORS

...designed for use in general-purpose amplifier and switching applications

FEATURES:


- * Power Dissipation - $P_D = 90W$ @ $T_C = 25^\circ C$
- * DC Current Gain $hFE = 20 \sim 100$ @ $I_C = 4.0 A$
- * $V_{CE(sat)} = 1.1 V$ (Max.) @ $I_C = 4.0 A$, $I_B = 400 mA$

MAXIMUM RATINGS

Characteristic	Symbol	Rating	Unit
Collector-Emitter Voltage	V_{CEO}	60	V
Collector-Emitter Voltage	V_{CER}	70	V
Collector-Base Voltage	V_{CBO}	100	V
Emitter-Base Voltage	V_{EBO}	7.0	V
Collector Current-Continuous	I_C	15	A
Base Current	I_B	7.0	A
Total Power Dissipation @ $T_C = 25^\circ C$ Derate above $25^\circ C$	P_D	90 0.72	W W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	- 65 to +150	$^\circ C$


THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.39	$^\circ C/W$

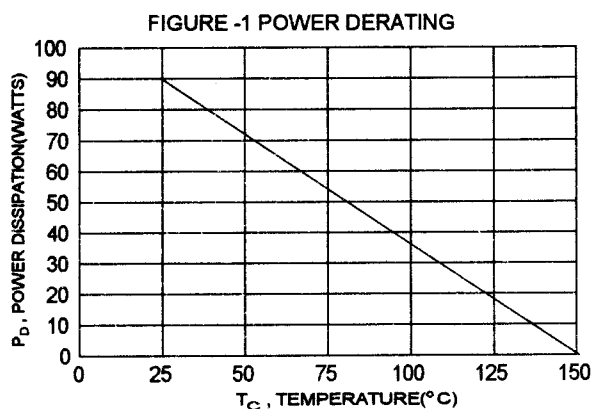


NPN **PNP**
TIP3055 **TIP2955**

15 AMPERE
COMPLEMENTARY SILICON
POWER TRANSISTORS
60 VOLTS
90 WATTS



TO-247(3P)



PIN 1.BASE
2.COLLECTOR
3.EMITTER

DIM	MILLIMETERS	
	MIN	MAX
A	20.63	22.38
B	15.38	16.20
C	1.90	2.70
D	5.10	6.10
E	14.81	15.22
F	11.72	12.84
G	4.20	4.50
H	1.82	2.46
I	2.92	3.23
J	0.89	1.53
K	5.26	5.66
L	18.50	21.50
M	4.68	5.36
N	2.40	2.80
O	3.25	3.65
P	0.55	0.70

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector - Emitter Sustaining Voltage (1) ($I_C = 30\text{ mA}$, $I_B = 0$)	$V_{CEO(sus)}$	60		V
Collector Cutoff Current ($V_{CE} = 70\text{ V}$, $R_{BE} = 100\text{ ohm}$)	I_{CER}		1.0	mA
Collector Cutoff Current ($V_{CE} = 30\text{ V}$, $I_B = 0$)	I_{CEO}		0.7	mA
Collector Cutoff Current ($V_{CE} = 100\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$)	I_{CEV}		5.0	mA
Emitter Cutoff Current ($V_{EB} = 7.0\text{ V}$, $I_C = 0$)	I_{EBO}		5.0	mA

ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 4.0\text{ A}$, $V_{CE} = 4.0\text{ V}$) ($I_C = 10\text{ A}$, $V_{CE} = 4.0\text{ V}$)	h_{FE}	20 5.0	100	
Collector - Emitter Saturation Voltage ($I_C = 4.0\text{ A}$, $I_B = 0.4\text{ A}$) ($I_C = 10\text{ A}$, $I_B = 3.3\text{ A}$)	$V_{CE(sat)}$		1.1 3.0	V
Base - Emitter On Voltage ($I_C = 4.0\text{ A}$, $V_{CE} = 4.0\text{ V}$)	$V_{BE(on)}$		1.8	V

DYNAMIC CHARACTERISTICS

Current Gain - Bandwidth Product ($I_C = 500\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ MHz}$)	f_T	2.5		MHz
Small-Signal Current Gain ($I_C = 1.0\text{ A}$, $V_{CE} = 4.0\text{ V}$, $f = 1\text{ KHz}$)	h_{FE}	15		

(1) Pulse Test: Pulse width = $300\text{ }\mu\text{s}$, Duty Cycle $\leq 2.0\%$ (2) $f_T = |h_{fe}| \cdot f_{test}$

FIG-2 DC CURRENT GAIN


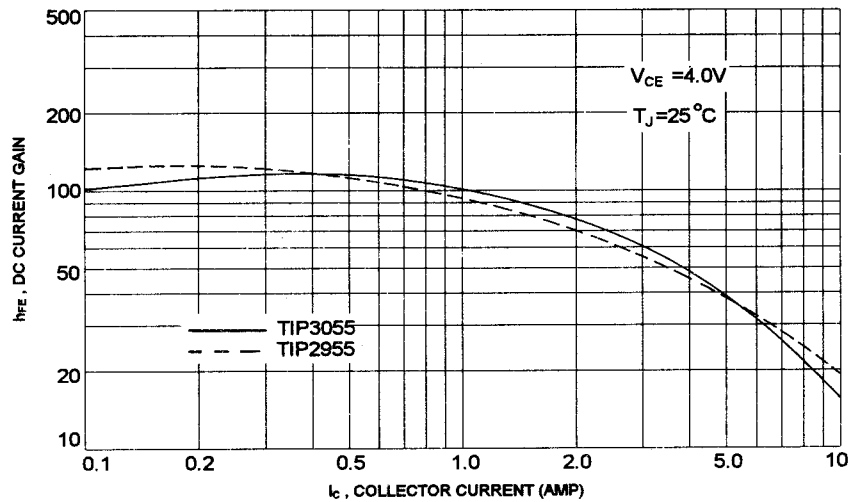


FIG-3 ACTIVE-REGION SAFE OPERATING AREA

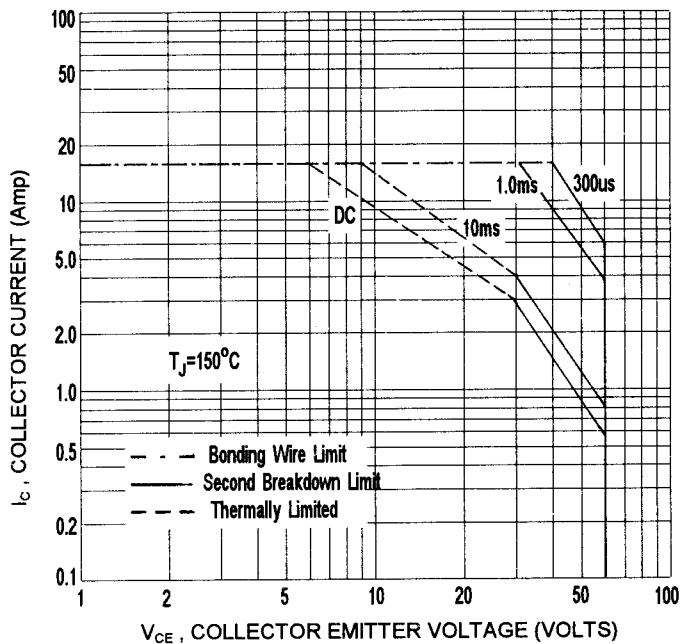

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of FIG-3 is base on $T_C = 150^\circ C$; $T_{J(PK)}$ is variable depending on power level. second breakdown pulse limits are valid for duty cycles to 10% but must be derated for temperature.

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)