


**SINGLE-PHASE BRIDGE RECTIFIER**  
**VOLTAGE RANGE 50 to 1000 Volts**  
**CURRENT 2.0 Ampere**

### FEATURES

- \* Low cost
- \* High forward surge current capability
- \* Ideal for printed circuit board
- \* High temperature soldering guaranteed:  
260°C/10 second at 5 lbs. (2.3kg) tension

### MECHANICAL DATA

- \* Case: Transfer molded plastic
- \* Epoxy: UL94V-O rate flame retardant
- \* Terminals : Lead Solderable Per MIL-STD-202E method 208C
- \* Polarity : As Marking on Body
- \* Mounting Position: Any
- \* Weight : 0.069 ounce, 1.95 gram

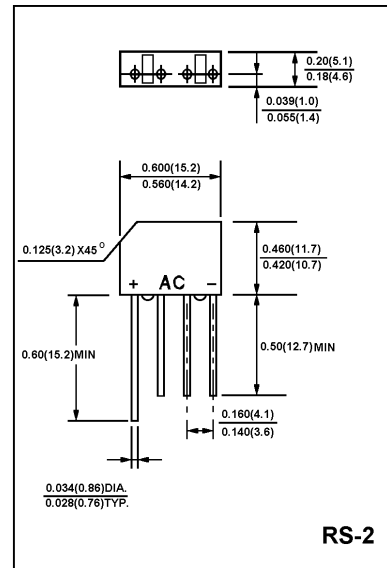

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- \* Rating at 25 °C ambient temperature unless otherwise specified
- \* Single phase, half wave, 60Hz, resistive or inductive load.
- \* For capacitive load derate current by 20 %

Characteristic	Symbol	KBP005	KBP01	KBP02	KBP04	KBP06	KBP08	KBP10	Unit
		RS201	RS202	RS203	RS204	RS205	RS206	RS207	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	50	100	200	400	600	800	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	700	V
Average Rectifier Forward Current (Note 1) @ $T_A=50$	$I_{O(AV)}$	2.0							A
Non-Repetitive Peak Surge Current 8.3 ms Single half sine-wave superimposed on rated load ( JEDEC Method)	$I_{FSM}$	50							A
Forward Voltage (per element) ( $I_F=2.0$ Amp)	$V_{FM}$	1.0							V
Peak Reverse Current ( Rated DC Voltage, $T_C = 25$ ) ( Rated DC Voltage, $T_C = 100$ )	$I_R$	10 0.5							uA mA
Rating for Fusing( $t < 8.3$ ms)	$I^2t$	10							A <sup>2</sup> s
Typical Junction Capacitance per element (Note2)	$C_J$	20							pF
Typical Thermal Resistance (note 3)	$R_{\theta JA}$	28							k/W
Operating and Storage Temperature Range	$T_J, T_{stg}$	-65 to +150							

- Note: 1 Lead maintained at ambient temperature at a distance of 9.5 mm from the case.  
 2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.  
 3. Thermal resistance junction to ambient, mounted on PC board with 12 mm<sup>2</sup> copper pad.

# KBP005/RS201 thru KBP10/RS207

FIG-1 FORWARD CURRENT DERATING CURVE

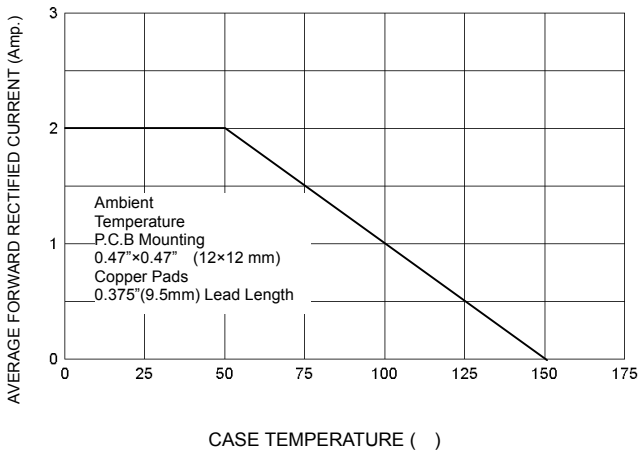


FIG-2 TYPICAL FORWARD CHARACTERISTICS

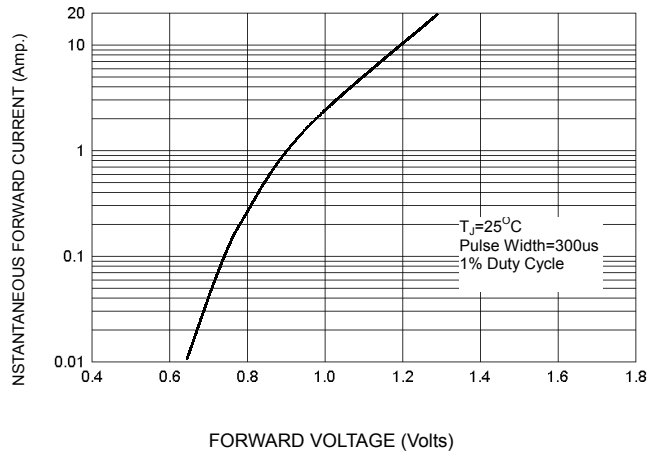


FIG-3 PEAK FORWARD SURGE CURRENT

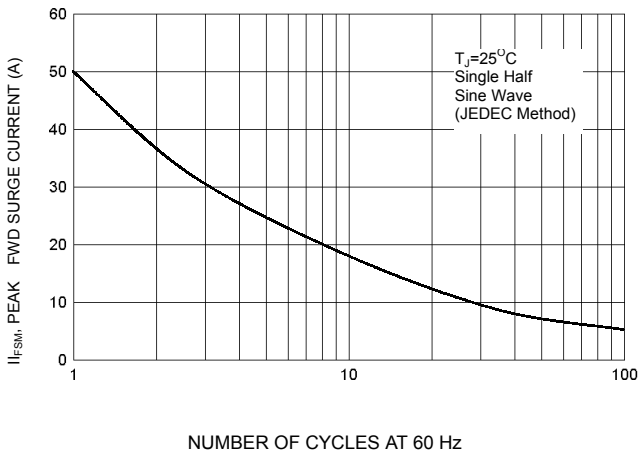


FIG-4 TYPICAL JUNCTION CAPACITANCE


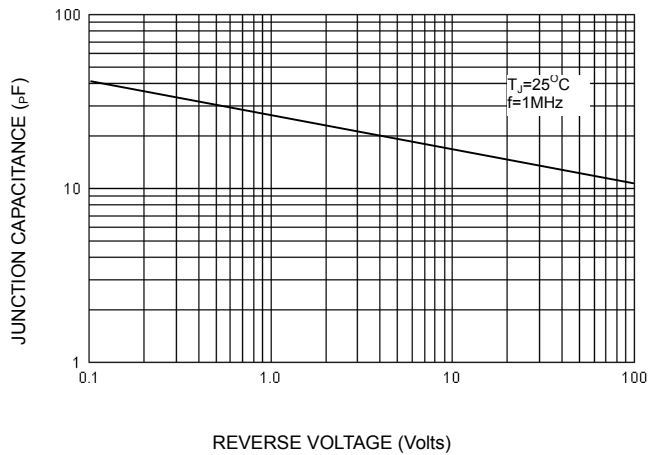


FIG-5 TYPICAL REVERSE CHARACTERISTICS

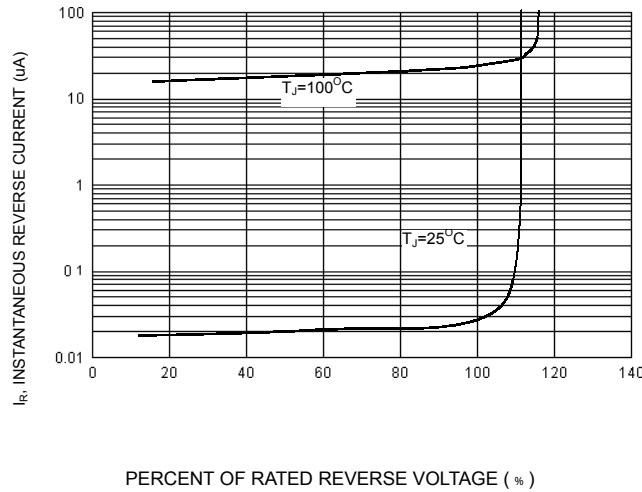

## Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life ( atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)