

NPN Silicon Power Transistors D PAK Surface Mount Power Package

The D PAK Power transistor is used by general purpose amplifiers, relay drives, lamp drives, motor drivers, and high speed switching applications.

Features:

- * 150 °C operation junction Temperature
- * Short Heat Sink Tab Manufactured- Not Sheared!
- * Similar in Size to the Industry Standard TO-251 package

Mechanical Characteristic

- * Case: Epoxy, Molded
- * Weight: 0.295 grams (approximately)
- * Finish: All External Surface Corrosion Resistant and Teminal


MAXIMUM RATINGS

Characteristic	Symbol	Rating	Unit
Collector-Emitter Voltage	V_{CE0}	50	V
Collector-Base Voltage	V_{CBO}	80	V
Emitter-Base Voltage	V_{EBO}	6.0	V
Collector Current-Continuous	I_C	5.0	A
Base Current	I_B	1.2	A
Total Power Dissipation @ $T_C=25^{\circ}\text{C}$ Derate above 25 °C	P_D	15 0.12	W W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	- 65 to + 150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R\theta_{jc}$	8.04	°C/W

FIGURE -1 POWER DERATING

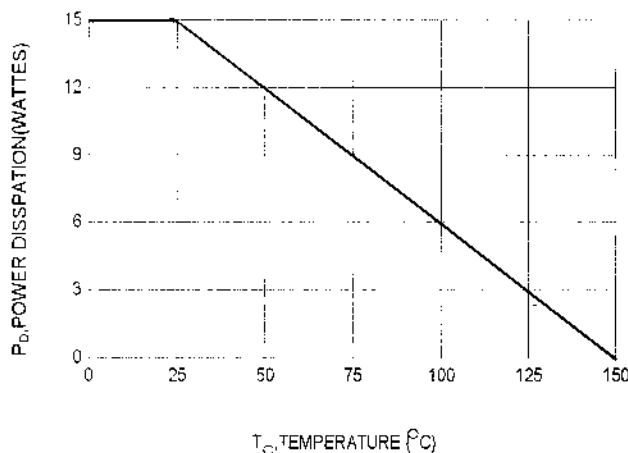


NPN
2SC5706

5 AMPERE
NPN SILICON
POWER TRANSISTOR

50 VOLTS
15 WATTS



TO-252AA (DPAK)

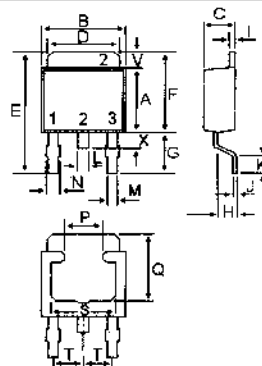

PIN 1.BASE
2.COLLECTOR(CASE)
3.EMITTER

DIM	MILLIMETERS	
	MIN	MAX
A	5.40	5.60
B	6.30	6.70
C	2.20	2.40
D	5.20	5.50
E	9.00	10.00
G	2.40	3.00
H	0.80	1.50
I	0.45	0.55
J	0.45	0.60
K	0.90	1.50
L	0.70	0.80
M	0.50	0.70
N	0.60	0.90
P	2.70	3.10
Q	5.10	5.30
S	4.80	5.00
T	-----	2.30
V	1.20	1.40
X	0.80	1.20

ELECTRICAL CHARACTERISTICS ($T_c=25^{\circ}\text{C}$ unless otherwise notes)

Characteristic	Symbol	Min	typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS (1)

Collector - Emitter Breakdown Voltage ($I_c = 1\text{ mA}$, $I_B = 0$)	$V_{CEO(BR)}$	50			V
Collector - Base Breakdown Voltage ($I_c = 10\text{ }\mu\text{A}$, $I_E = 0$)	$V_{CBO(BR)}$	80			V
Collector Cutoff Current ($V_{CB} = 40\text{ V}$, $I_E = 0$)	I_{CBO}			1.0	μA
Emitter Cutoff Current ($V_{EB} = 4.0\text{ V}$, $I_c = 0$)	I_{EBO}			1.0	μA

ON CHARACTERISTICS

DC Current Gain ($I_c = 500\text{ mA}$, $V_{CE} = 2.0\text{ V}$)	h_{FE}	200		560	
Collector - Emitter Saturation Voltage ($I_c = 1.0\text{ A}$, $I_B = 50\text{ mA}$) ($I_c = 2.0\text{ A}$, $I_B = 100\text{ mA}$)	$V_{CE(SAT)}$			135 240	mV
Base - Emitter Saturation Voltage ($I_c = 2.0\text{ A}$, $I_B = 100\text{ mA}$)	$V_{BE(SAT)}$			1.2	V

DYNAMIC CHARACTERISTICS

Gain-Bandwidth Product ($I_c = 500\text{ mA}$, $V_{CE} = 10\text{ V}$)	f_T		400		
Output Capacitance ($V_{CB} = 10\text{ V}$, $I_E = 0$, $f = 1\text{ MHz}$)	C_{ob}		20		pF

(1) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)