

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

... designed for use in power amplifier and switching circuit applications.

FEATURES:

* Collector-Emitter Sustaining Voltage-

$V_{CEO(sus)} = 30 \text{ V (Min) - 2N6111, 2N6288}$

$= 50 \text{ V (Min) - 2N6109, 2N6290}$

$= 70 \text{ V (Min) - 2N6107, 2N6292}$

* DC Current Gain Specified to 7.0 Amperes

$hFE = 30-150 @ I_C = 3.0 \text{ A - 2N6111, 2N6292}$

$= 2.3(\text{Min}) @ I_C = 7.0 \text{ A - All Devices}$

PNP NPN

2N6107 2N6288


2N6109 2N6290

2N6111 2N6292


**7 AMPERE
COMPLEMENTARY SILICON
POWER TRANSISTORS
30-70 Volts
40 Watts**

MAXIMUM RATINGS

Characteristic	Symbol	2N6111 2N6288	2N6109 2N6290	2N6107 2N6292	Unit
Collector-Emitter Voltage	V_{CEO}	30	50	70	V
Collector-Base Voltage	V_{CBO}	40	60	80	V
Emitter-Base Voltage	V_{EBO}	5.0			V
Collector Current - Continuous - Peak	I_C	7.0 10			A
Base Current	I_B	3.0			A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	40 0.32			W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +150			$^\circ\text{C}$



TO-220




PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR(CASE)

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	3.125	$^\circ\text{C/W}$

FIGURE -1 POWER DERATING

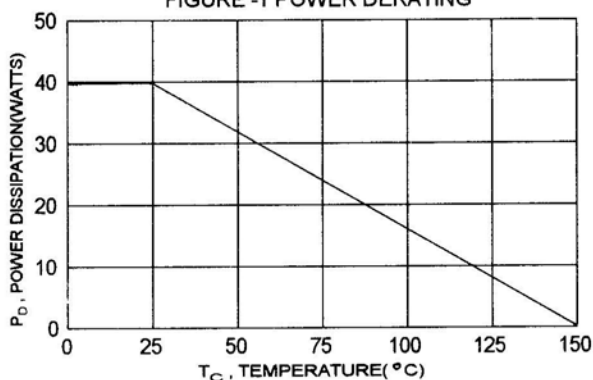

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	16.00
B	9.78	10.42
C	5.02	6.60
D	13.00	14.62
E	3.10	4.19
F	2.41	2.67
G	1.10	1.67
H	0.69	1.01
I	3.21	4.98
J	1.14	1.40
K	2.20	3.30
L	0.28	0.61
M	2.48	3.00
O	3.50	4.00

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector - Emitter Sustaining Voltage (1) ($I_c = 100\text{ mA}$, $I_B = 0$)	2N6111, 2N6288 2N6109, 2N6290 2N6107, 2N6292	$V_{CE(sus)}$	30 50 70	V
Collector Cutoff Current ($V_{CE} = 20\text{ V}$, $I_B = 0$) ($V_{CE} = 40\text{ V}$, $I_B = 0$) ($V_{CE} = 60\text{ V}$, $I_B = 0$)	2N6111, 2N6288 2N6109, 2N6290 2N6107, 2N6292	I_{CEO}	1.0 1.0 1.0	mA
Collector Cutoff Current ($V_{CE} = 40\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$) ($V_{CE} = 60\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$) ($V_{CE} = 80\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$) ($V_{CE} = 30\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$, $T_c = 125^\circ\text{C}$) ($V_{CE} = 50\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$, $T_c = 125^\circ\text{C}$) ($V_{CE} = 70\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$, $T_c = 125^\circ\text{C}$)	2N6111, 2N6288 2N6109, 2N6290 2N6107, 2N6292 2N6111, 2N6288 2N6109, 2N6290 2N6107, 2N6292	I_{CEX}	0.1 0.1 0.1 2.0 2.0 2.0	mA
Emitter Cutoff Current ($V_{EB} = 5.0\text{ V}$, $I_C = 0$)		I_{EBO}	1.0	mA

ON CHARACTERISTICS (1)

DC Current Gain ($I_c = 2.0\text{ A}$, $V_{CE} = 4.0\text{ V}$) ($I_c = 2.5\text{ A}$, $V_{CE} = 4.0\text{ V}$) ($I_c = 3.0\text{ A}$, $V_{CE} = 4.0\text{ V}$) ($I_c = 7.0\text{ A}$, $V_{CE} = 4.0\text{ V}$)	2N6107, 2N6292 2N6109, 2N6290 2N6111, 2N6288 All Devices	h_{FE}	30 30 30 2.3	150 150 150	
Collector-Emitter Saturation Voltage ($I_c = 7.0\text{ A}$, $I_B = 3.0\text{ A}$)		$V_{CE(sat)}$		3.5	V
Base-Emitter On Voltage ($I_c = 7.0\text{ A}$, $V_{CE} = 4.0\text{ V}$)		$V_{BE(on)}$		3.0	V

DYNAMIC CHARACTERISTICS

Current-Gain-Bandwidth Product (2) ($I_c = 0.5\text{ A}$, $V_{CE} = 4.0\text{ V}$, $f = 1.0\text{ MHz}$)	2N6288,90,92 2N6107,09,11	f_T	2.5 10		MHz
Small-Signal Current Gain ($I_c = 0.5\text{ A}$, $V_{CE} = 4.0\text{ V}$, $f = 50\text{ KHz}$)		h_{fe}	20		

(1) Pulse Test: Pulse width = 300 μs , Duty Cycle $\leq 2.0\%$ (2) $f_T = |h_{fe}| \cdot f_{test}$

FIGURE 2 - SWITCHING TIME TEST CIRCUIT

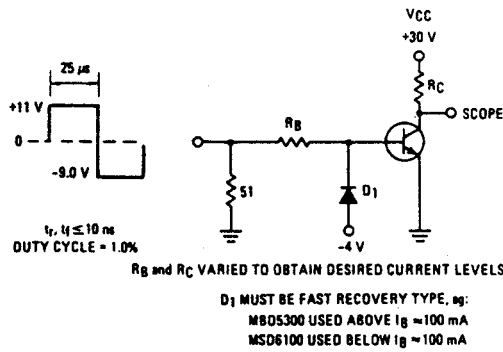


FIG-3 TURN-OFF TIME

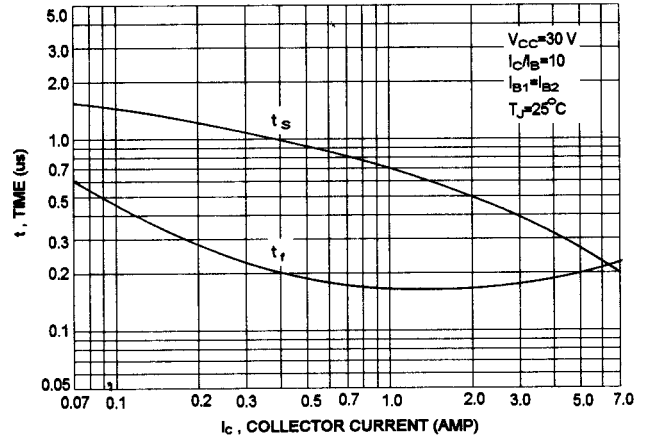


FIG-4 DC CURRENT GAIN

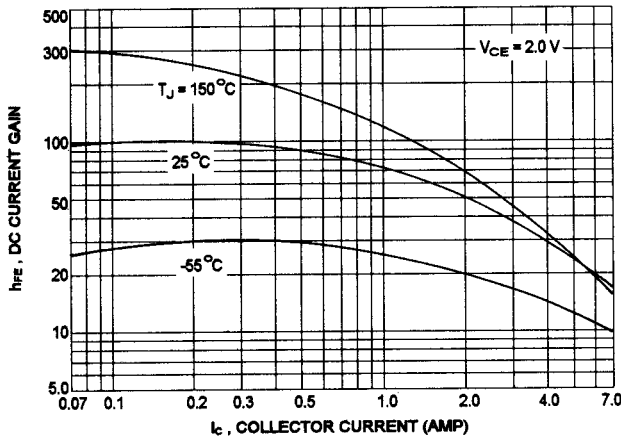


FIG-5 TURN-ON TIME


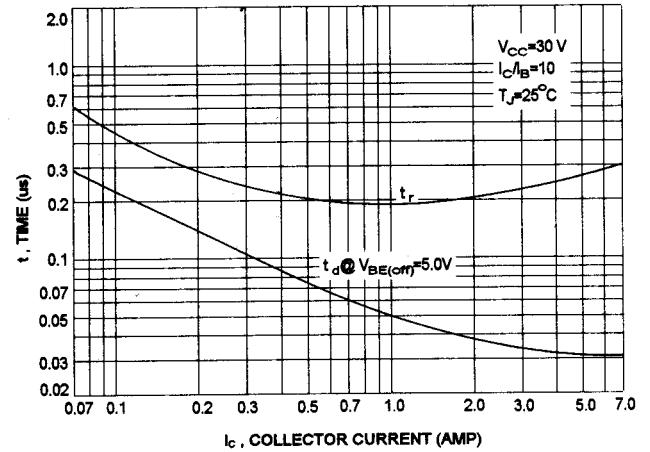


FIG-6 ACTIVE REGION SAFE OPERATING AREA

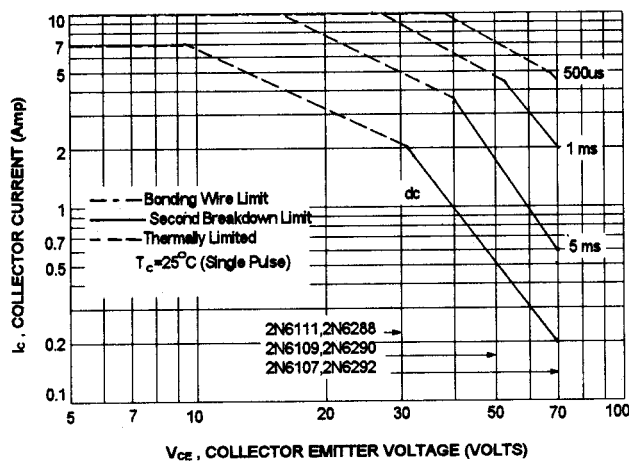

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of FIG-6 is base on $T_{J(PK)} = 150^\circ \text{C}$; T_C is variable depending on power level. second breakdown pulselimits are valid for duty cycles to 10% provided $T_{J(PK)} \leq 150^\circ \text{C}$. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIG-7 COLLECTOR SATURATION REGION

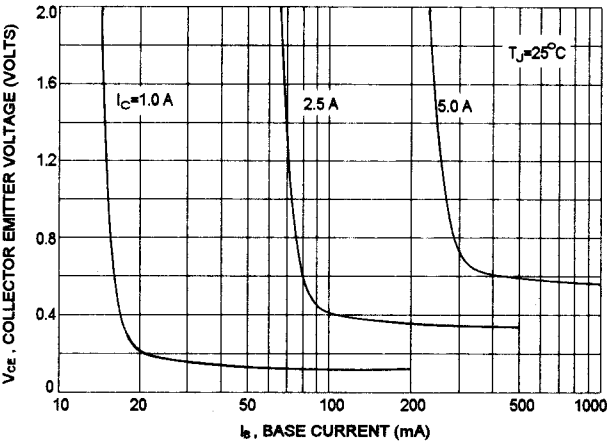


FIG-8 CAPACITANCES

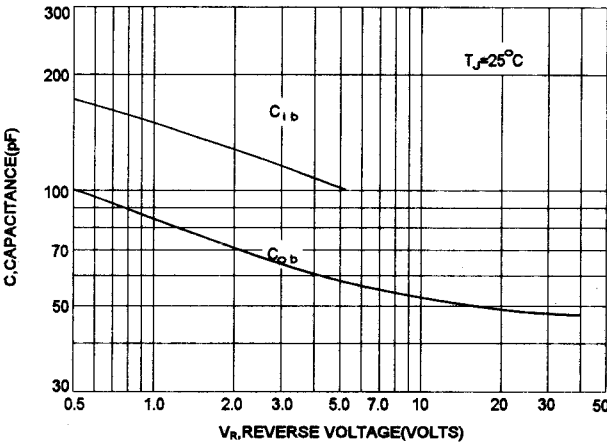


FIG-9 "ON" VOLTAGE


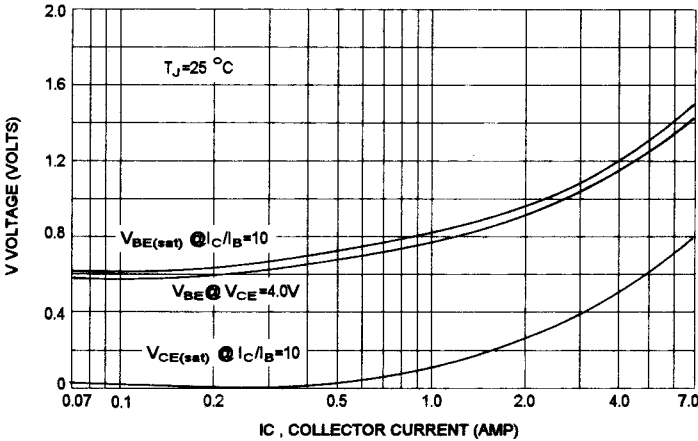


FIG-10 COLLECTOR CUT-OFF REGION

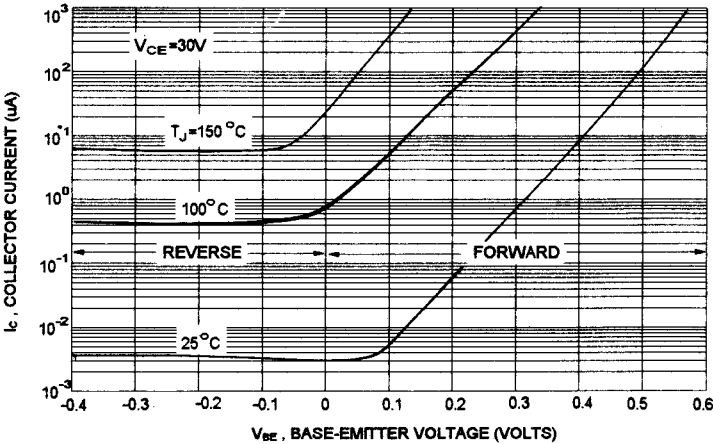

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)