

PLASTIC MEDIUM- POWER SILICON TRANSISTORS

...designed for general-purpose amplifier and low speed switching applications

FEATURES:

* Collector-Emitter Sustaining Voltage-

$V_{CE(SUS)} = 40 \text{ V (Min)} - 2N6666$

$= 60 \text{ V (Min)} - 2N6667$

$= 80 \text{ V (Min)} - 2N6668$


* Collector-Emitter Saturation Voltage

$V_{CE(sat)} = 2.0 \text{ V (Max.)} @ I_C = 3.0 \text{ A} - 2N6666$

$= 2.0 \text{ V (Max.)} @ I_C = 5.0 \text{ A} - 2N6667, 2N6668$

* DC Current Gain $h_{FE} = 3000(\text{Typ}) @ I_C = 4.0 \text{ A}$

* Complementary to 2N6386, 2N6387, 2N6388



PNP

2N6666


2N6667

2N6668

**8 AND 10 AMPERE
DARLINGTON
POWER TRANSISTORS
PNP SILICON
40-80 VOLTS
65 WATTS**

MAXIMUM RATINGS


Characteristic	Symbol	2N6666	2N6667	2N6668	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	V
Collector-Base Voltage	V_{CBO}	40	60	80	V
Emitter-Base Voltage	V_{EBO}	5.0			V
Collector Current-Continuous -Peak	I_C I_{CM}	8.0 15	10 15	10 15	A
Base Current	I_B	0.25			A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	65 0.52			W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	- 65 to +150			$^\circ\text{C}$




TO-220

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.92	$^\circ\text{C/W}$



PIN 1.BASE
2.COLLECTOR
3.EMITTER
4.COLLECTOR(CASE)

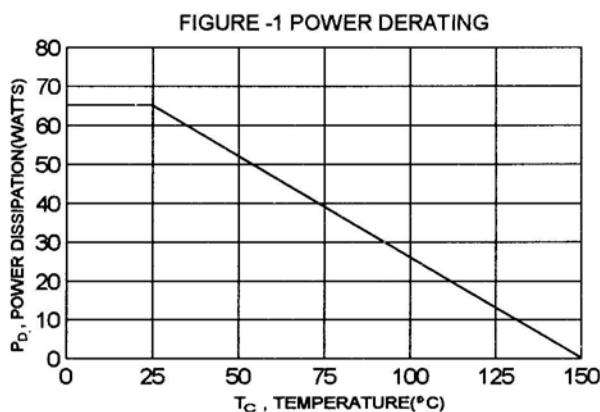

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	16.00
B	9.78	10.42
C	5.02	6.60
D	13.00	14.62
E	3.10	4.19
F	2.41	2.67
G	1.10	1.67
H	0.69	1.01
I	3.21	4.98
J	1.14	1.40
K	2.20	3.30
L	0.28	0.61
M	2.48	3.00
O	3.50	4.00

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector - Emitter Sustaining Voltage (1) ($I_c = 200\text{ mA}$, $I_B = 0$) 2N6666 2N6667 2N6668	$V_{CE(sus)}$	40 60 80		V
Collector Cutoff Current ($V_{CE} = 40\text{ V}$, $I_B = 0$) ($V_{CE} = 60\text{ V}$, $I_B = 0$) ($V_{CE} = 80\text{ V}$, $I_B = 0$) 2N6666 2N6667 2N6668	I_{CEO}		1.0 1.0 1.0	mA
Collector Cutoff Current ($V_{CE} = 40\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$) ($V_{CE} = 60\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$) ($V_{CE} = 80\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$) ($V_{CE} = 40\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$, $T_c = 125^\circ\text{C}$) ($V_{CE} = 60\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$, $T_c = 125^\circ\text{C}$) ($V_{CE} = 80\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$, $T_c = 125^\circ\text{C}$) 2N6666 2N6667 2N6668 2N6666 2N6667 2N6668	I_{CEX}		0.3 0.3 0.3 3.0 3.0 3.0	mA
Emitter Cutoff Current ($V_{EB} = 5.0\text{ V}$, $I_C = 0$)	I_{EBO}		5.0	mA

ON CHARACTERISTICS (1)


DC Current Gain ($I_c = 3.0\text{ A}$, $V_{CE} = 3.0\text{ V}$) ($I_c = 5.0\text{ A}$, $V_{CE} = 3.0\text{ V}$) ($I_c = 8.0\text{ A}$, $V_{CE} = 3.0\text{ V}$) ($I_c = 10\text{ A}$, $V_{CE} = 3.0\text{ V}$) 2N6666 2N6667, 2N6668 2N6666 2N6667, 2N6668	h_{FE}	1000 1000 100 100	20000 20000	
Collector-Emitter Saturation Voltage ($I_c = 3.0\text{ A}$, $I_B = 6\text{ mA}$) ($I_c = 5.0\text{ A}$, $I_B = 10\text{ mA}$) ($I_c = 8.0\text{ A}$, $I_B = 80\text{ mA}$) ($I_c = 10\text{ A}$, $I_B = 100\text{ mA}$) 2N6666 2N6667, 2N6668 2N6666 2N6667, 2N6668	$V_{CE(sat)}$		2.0 2.0 3.0 3.0	V
Base-Emitter On Voltage ($I_c = 3.0\text{ A}$, $V_{CE} = 3.0\text{ V}$) ($I_c = 5.0\text{ A}$, $V_{CE} = 3.0\text{ V}$) ($I_c = 8.0\text{ A}$, $V_{CE} = 3.0\text{ V}$) ($I_c = 10\text{ A}$, $V_{CE} = 3.0\text{ V}$) 2N6666 2N6667, 2N6668 2N6666 2N6667, 2N6668	$V_{BE(on)}$		2.8 2.8 4.5 4.5	V

DYNAMIC CHARACTERISTICS


Small-Signal Current Gain ($I_c = 1.0\text{ A}$, $V_{CE} = 5.0\text{ V}$, $f = 1.0\text{ KHz}$)	h_{fe}	1000		
Output Capacitance ($V_{CB} = 10\text{ V}$, $I_E = 0$, $f = 1.0\text{ MHz}$)	C_{ob}		200	pF

(1) Pulse Test: Pulse width = $300\mu\text{s}$, Duty Cycle $\leq 2.0\%$


DC CURRENT GAIN

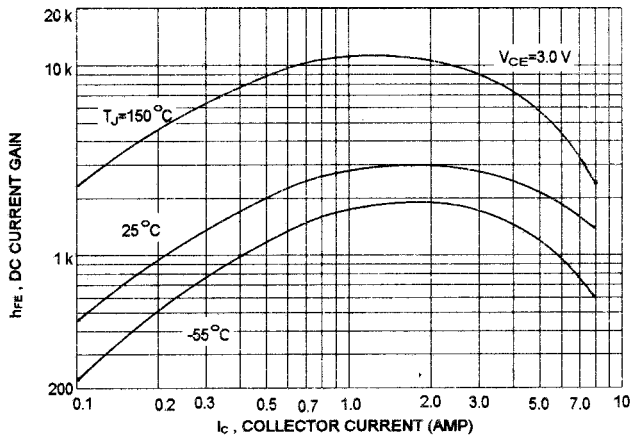


COLLECTOR SATURATION REGION

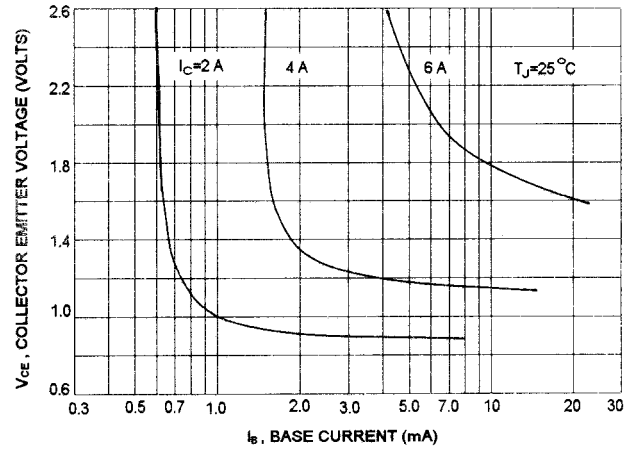


"ON" VOLTAGES

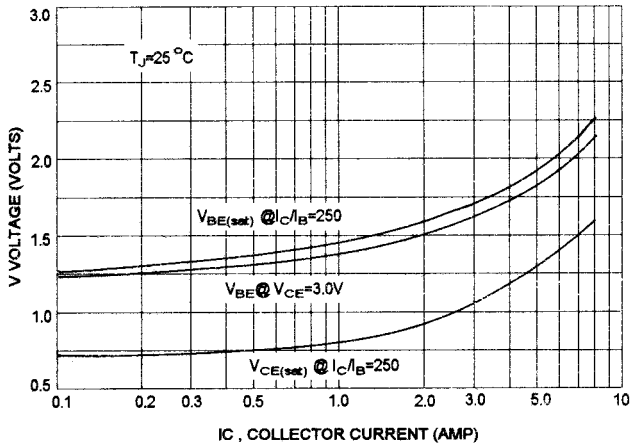

SWITCHING TIME

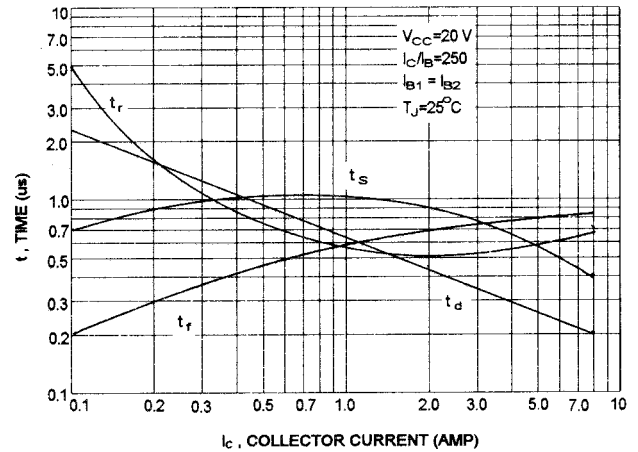

ACTIVE-REGION SAFE OPERATING AREA (SOA)

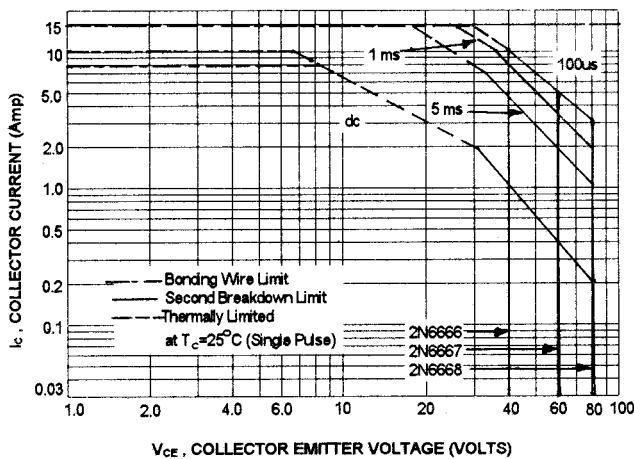

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of SOA curve is base on $T_{J(PK)} = 150^\circ\text{C}$; T_C is variable depending on conditions. second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(PK)} \leq 150^\circ\text{C}$. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)