


650V 10A Trench and Field Stop IGBT

DESCRIPTION :

- High ruggedness performance
- 10μs short circuit capability
- Positive $V_{CE(SAT)}$ temperature coefficient
- High efficiency for motor control
- Excellent current sharing in parallel operation
- RoHS compliant.



TYPICAL APPLICATIONS :

- Home appliances
- Motor drives

TO-252

IGBT

MAXIMUM RATINGS (Tvj=25°C unless otherwise specified)

Characteristic	Condition	Symbol	Value	Unit
Collector-Emitter Voltage		V_{CES}	650	V
Continuous collector current	Tc=25°C Tc=100°C	$I_{C\ nom}$	20 10	A
Pulsed collector current	t _p limited by Tvjmax	I_{CM}	40	A
Gate emitter voltage		V_{GE}	±20	V
Short circuit withstand time		t _{SC}	10	us
Power dissipation	Tc=25°C Tc=100°C	P_{tot}	100 50	W
Temperature under switching conditions		Tvj op	-40~+175	°C
Storage temperature		T _{STG}	-55~+150	°C

THERMAL CHARACTERISTICS

Characteristic	Condition	Symbol	Max.	Unit
IGBT thermal resistance, junction - case		$R_{th(j-C)}$	1.5	K/W
Diode thermal resistance, junction - case		$R_{th(j-C)}$	2.0	K/W
Thermal resistance, junction - ambient		$R_{th(j-A)}$	62	K/W

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Collector-emitter cut-off current VCE=650V, VGE=0V Tvj=25°C	I_{CES}			50	μA
Gate-emitter leakage current VCE=0V, VGE=20V Tvj=25°C	I_{GES}			100	nA
Gate-Emitter threshold voltage IC=0.25mA, VGE= VCE Tvj=25°C	$V_{GE(th)}$	5.5	5.8	6.2	V
Collector-Emitter saturation voltage VGE=15V, IC=10A Tvj=25°C VGE=15V, IC=10A Tvj=150°C	$V_{CE(SAT)}$		1.8 2.1		V
Input capacitance f=1MHz, VCE=30 V, VGE=0 V Tvj=25°C	C_{ies}		670		pF
Output capacitance f=1MHz, VCE=30 V, VGE=0 V Tvj=25°C	C_{oes}		37		pF
Reverse transfer capacitance f=1MHz, VCE=30 V, VGE=0 V Tvj=25°C	C_{res}		10		pF
Gate charge IC = 10A, VGE = 15 V, VCC = 520V Tvj=25°C	Q_G		28		nC
Turn-on delay time IC=10A, VCC=400 V Tvj=25°C VGE=0/15 V, RG=10Ω Tvj=150°C (inductive load)	$t_{d(ON)}$		12 10		ns
Rise time IC=10A, VCC=400 V Tvj=25°C VGE=0/15 V, RG=10Ω Tvj=150°C (inductive load)	t_r		11 12		ns
Turn-off delay time IC=10A, VCC=400 V Tvj=25°C VGE=0/15 V, RG=10Ω Tvj=150°C (inductive load)	$t_{d(OFF)}$		71 86		ns
Fall time IC=10A, VCC=400 V Tvj=25°C VGE=0/15 V, RG=10Ω Tvj=150°C (inductive load)	t_f		74 112		ns
Turn-on energy IC=10A, VCC=400 V Tvj=25°C VGE=0/15 V, RG=10Ω Tvj=150°C (inductive load)	$E_{(ON)}$		0.18 0.21		mJ

Turn-off energy loss per pulse IC=10A, VCC=400 V Tvj=25°C VGE=0/15 V, RG=10Ω Tvj=150°C (inductive load)	E _(OFF)		0.17 0.25		mJ
--	--------------------	--	--------------	--	----

Diode

MAXIMUM RATINGS (Tvj=25°C unless otherwise specified)

Characteristic	Condition	Symbol	Value	Unit
Repetitive peak reverse voltage	Tvj=25°C	V _{RRM}	650	V
Continuous forward current	Tc=100°C	I _F	10	A
Diode maximum current	t _p limited by Tvj max	I _{FM}	40	A

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Forward voltage IF=10A, VGE=0 V Tvj=25°C IF=10A, VGE=0 V Tvj=150°C	V _F		1.4 1.2		V
Reverse Recovered Time IF=10 A, Tvj=25°C -diF/dt =750A/μs Tvj=150°C VR=400 V	T _{rr}		57 118		ns
Peak reverse recovery current IF=10 A, Tvj=25°C -diF/dt =750A/μs Tvj=150°C VR=400 V	I _{RRM}		12 13		A
Reverse Recovered charge IF=10 A, Tvj=25°C -diF/dt =750A/μs Tvj=150°C VR=400 V	Q _{rr}		411 728		nC

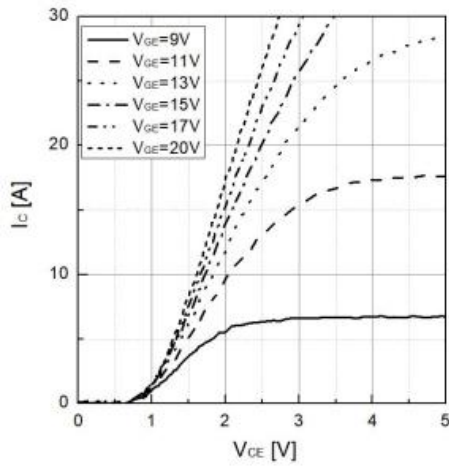


Figure 1. Typical output characteristics ($T_{vj}=25^{\circ}\text{C}$)

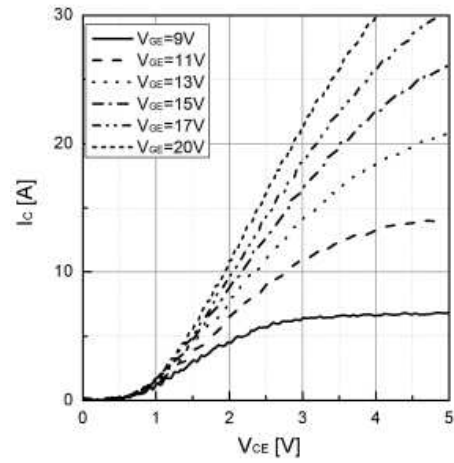


Figure 2. Typical output characteristics ($T_{vj}=150^{\circ}\text{C}$)

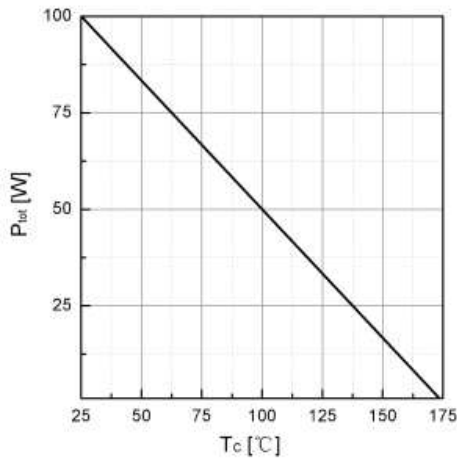


Figure 3. Power dissipation as a function of TC

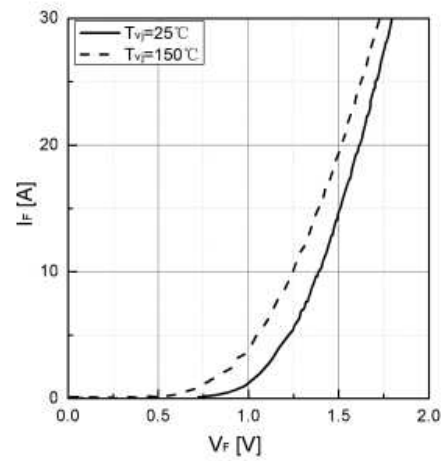


Figure 4. Typical I_F as a function of V_F

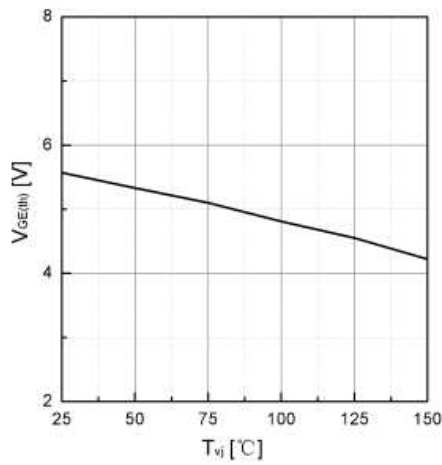


Figure 5. Typical $V_{GE(th)}$ as a function of T_{vj} ($I_C=1\text{mA}$)

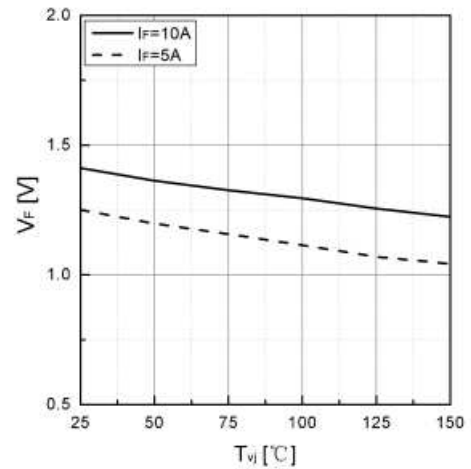


Figure 6. Typical V_F as a function of T_{vj}

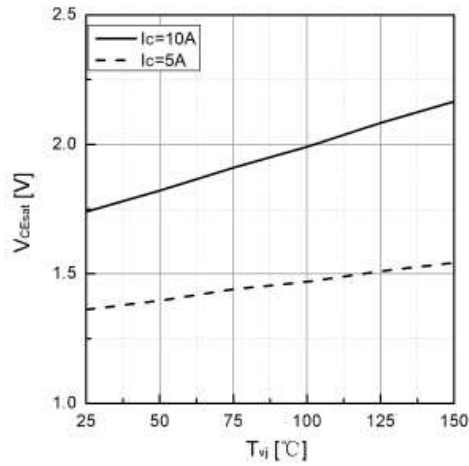


Figure 7. Typical V_{CEsat} as a function of T_{vj}

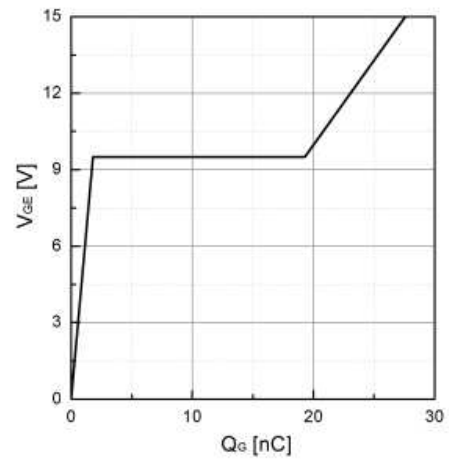


Figure 8. Typical Gate charge

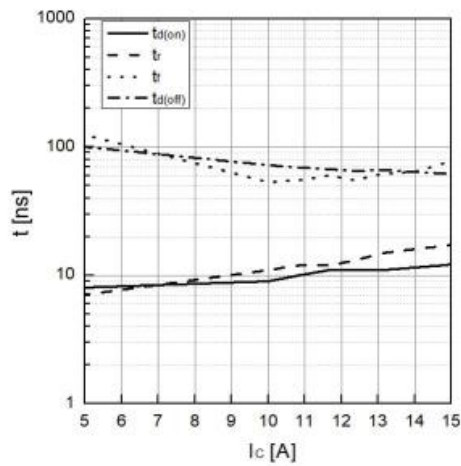


Figure 9. Typical switching times as a function of I_c

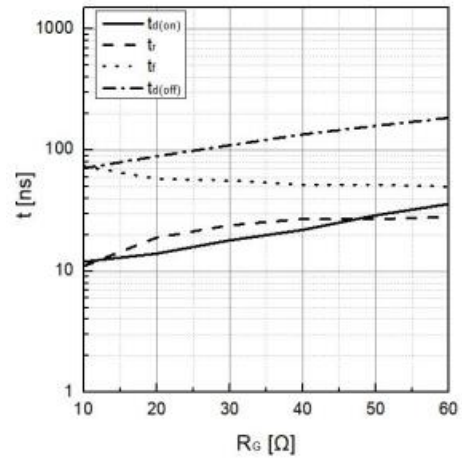


Figure 10. Typical switching times as a function of R_G

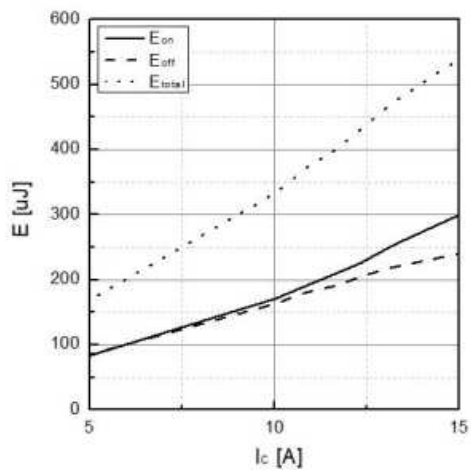


Figure 11. Typical switching energy losses as a function of I_c

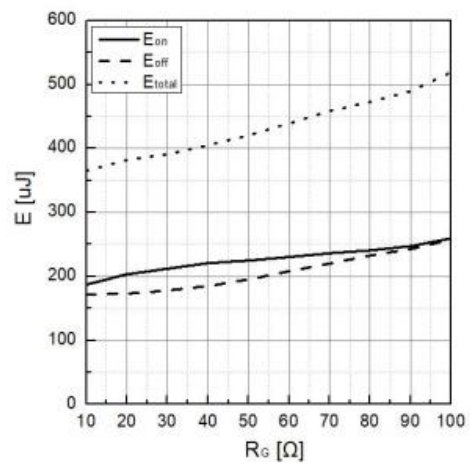


Figure 12. Typical switching energy losses as a function of R_G



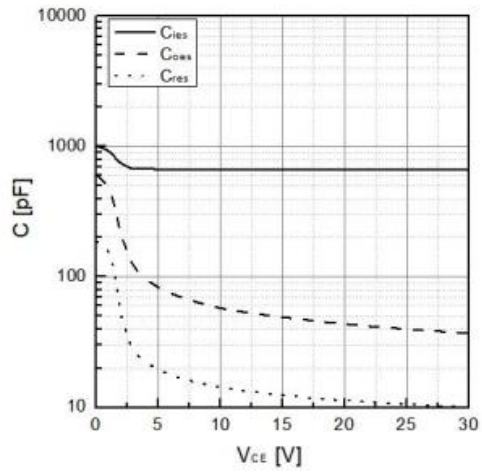


Figure 13. Typical capacitance as a function of VCE (f=1Mhz, VGE=0V)

• Circuit diagram



• Package outlines : Dimensions in (mm)

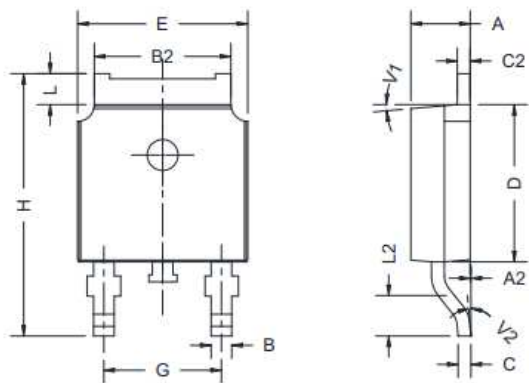

DIM	MILLIMETERS	
	MIN	MAX
A	2.10	2.50
A2	0.00	0.10
B	0.66	0.86
B2	5.18	5.48
C	0.40	0.60
C2	0.44	0.58
D	5.90	6.30
E	6.40	6.80
G	4.47	4.67
H	9.50	10.70
L	1.09	1.21
L2	1.35	1.65
V1	Typ.7°	
V2	0°	6°

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)