

HIGH-VOLTAGE HIGH POWER TRANSISTORS

.... designed for use in high power amplifier, and switching application.

FEATURES:

- * High Power Dissipation
 $P_D = 200W (T_C = 25^\circ C)$
- * High Collector Current- $I_C = 25A (DC)$
- * High Speed Switching - $t_f = 0.5 \mu s (Typ) @ I_C = 15A$
- * Low Saturation Voltage- $V_{CE(sat)} = 1.0V (Max) @ I_C = 15A$


MAXIMUM RATINGS

Characteristic	Symbol	2SD1313	Unit
Collector-Emitter Voltage	V_{CEO}	350	V
Collector-Base Voltage	V_{CBO}	800	V
Emitter-Base Voltage	V_{EBO}	7.0	V
Collector Current - Continuous	I_C	25	A
Base Current	I_B	10	A
Total Power Dissipation @ $T_C = 25^\circ C$ Derate above $25^\circ C$	P_D	200 1.6	W W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ C$

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	0.625	$^\circ C/W$

FIGURE -1 POWER DERATING

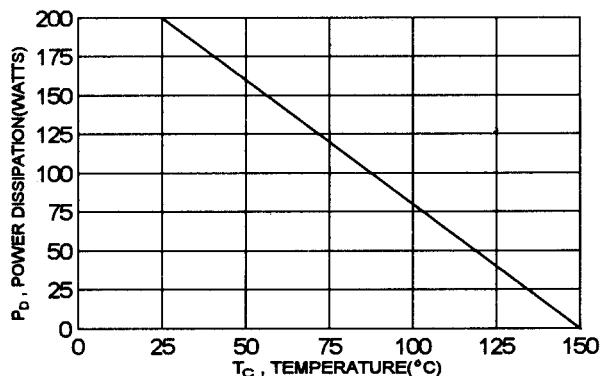


NPN
2SD1313

25 AMPERE
POWER
TRANSISTORS
350 VOLTS
200 WATTS



TO-247(3P)



PIN 1.BASE
2.COLLECTOR
3.EMITTER

DIM	MILLIMETERS	
	MIN	MAX
A	20.63	22.38
B	15.38	16.20
C	1.90	2.70
D	5.10	6.10
E	14.81	15.22
F	11.72	12.84
G	4.20	4.50
H	1.82	2.46
I	2.92	3.23
J	0.89	1.53
K	5.26	5.66
L	18.50	21.50
M	4.68	5.36
N	2.40	2.80
O	3.25	3.65
P	0.55	0.70

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage ($I_C = 10\text{ mA}$, $I_B = 0$)	$V_{(BR)CEO}$	350		V
Collector Cutoff Current ($V_{CB} = 800\text{ V}$, $I_E = 0$)	I_{CBO}		1.0	mA
Emitter Cutoff Current ($V_{EB} = 7.0\text{ V}$, $I_C = 0$)	I_{EBO}		1.0	mA

ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 1.0\text{ A}$, $V_{CE} = 5.0\text{ V}$) ($I_C = 25\text{ A}$, $V_{CE} = 5.0\text{ V}$)	h_{FE}	15 4.0		
Collector-Emitter Saturation Voltage ($I_C = 15\text{ A}$, $I_B = 3.0\text{ A}$)	$V_{CE(sat)}$		1.0	V
Base-Emitter Saturation Voltage ($I_C = 15\text{ A}$, $I_B = 3.0\text{ A}$)	$V_{BE(sat)}$		1.7	V

DYNAMIC CHARACTERISTICS


Current-Gain-Bandwidth Product ($I_C = 1.0\text{ A}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ MHz}$)	f_T	5.0(typ)		MHz
--	-------	----------	--	-----

SWITCHING CHARACTERISTICS


Turn-on Time	$V_{CC} = 200\text{ V}$, $I_C = 10\text{ A}$ $I_{B1} = -I_{B2} = 2.0\text{ A}$ $PW = 20\text{ us}$	t_{on}	1.0	us
Storage Time		t_s	4.0	us
Fall Time		t_f	0.8	us

(1) Pulse Test: Pulse Width = 300 us, Duty Cycle $\leq 2.0\%$



ACTIVE REGION SAFE OPERATING AREA

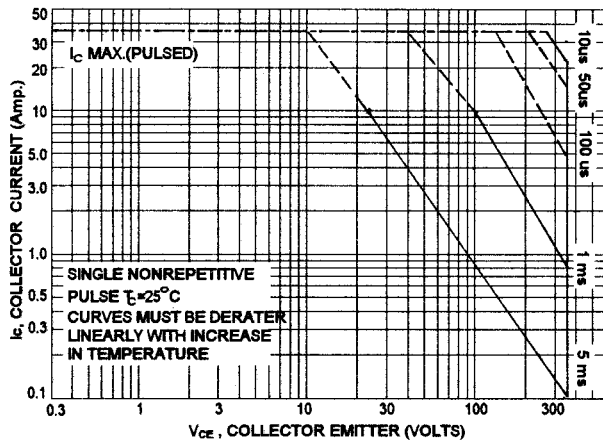



DC CURRENT GAIN

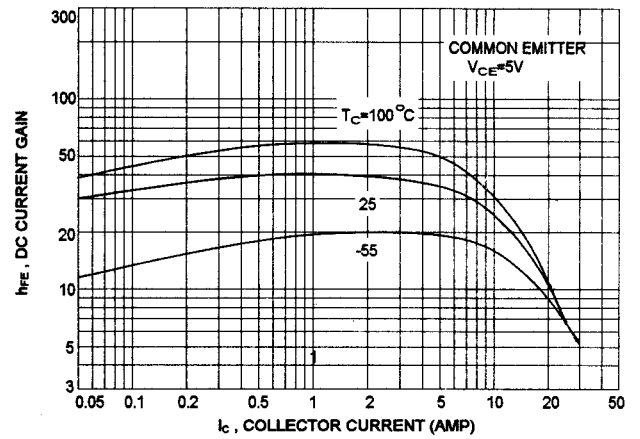

"ON" VOLTAGES

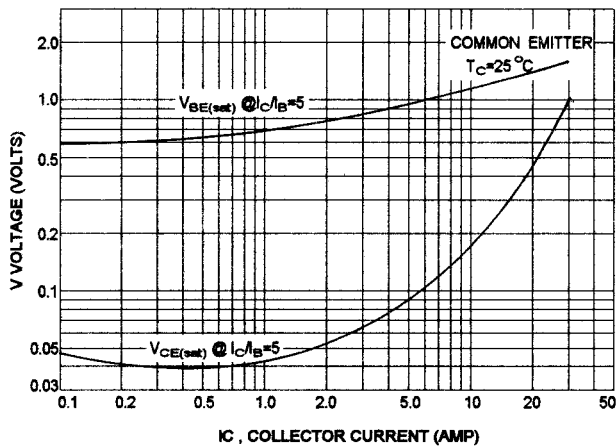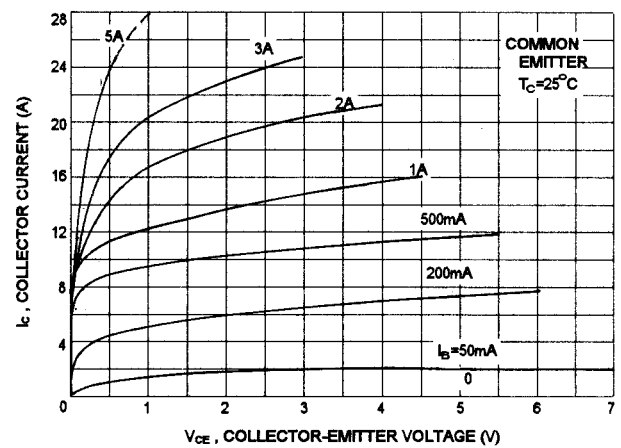 $I_C - V_{CE}$ 

SWITCHING TIME

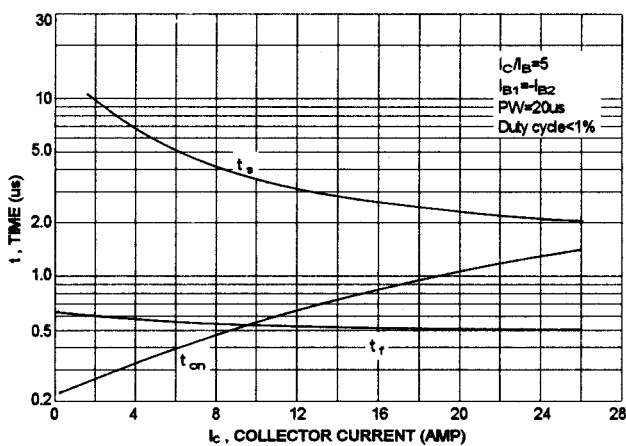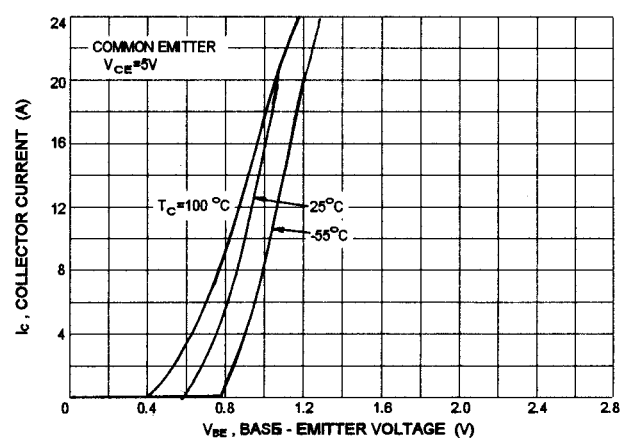 $I_C - V_{BE}$ 

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)