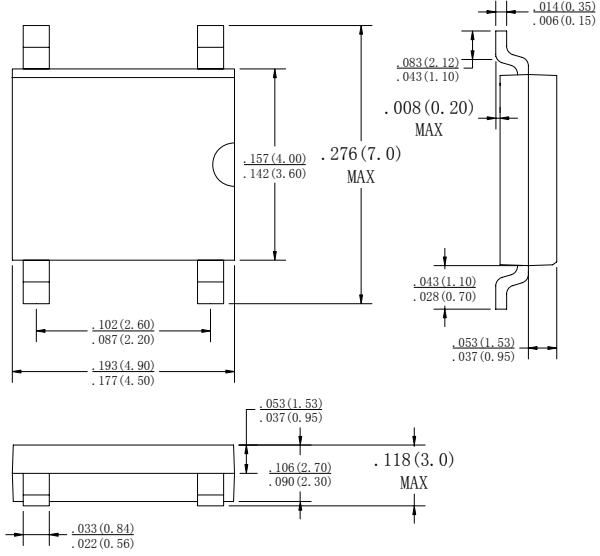


Single Phase 0.8 AMPS. Glass Passivated Bridge Rectifiers	Voltage Range 200 to 1000 Volts Current 0.8 Amperes
<p>Features</p> <ul style="list-style-type: none"> • Ideal for printed circuit board • Reliable low cost construction technique results in inexpensive product • High temperature soldering guaranteed: 260°C / 10 seconds / 0.375" (9.5mm) lead length at 5 lbs., (2.3 kg) tension <p>Mechanical Data</p> <ul style="list-style-type: none"> • Case: Molded plastic • Lead: solder plated • Polarity: As marked 	<p>MBS</p>  <p style="text-align: center;">Dimensions in inches and (millimeters)</p>

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number		MB2S	MB4S	MB6S	MB8S	MB10S	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	140	280	420	560	700	V
Maximum DC blocking Voltage	V _{DC}	200	400	600	800	1000	V
Maximum Average Forward Rectified Current On glass-epoxy P.C.B. On aluminum substrate	I _(AV)			0.5 0.8			A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}			35			A
Maximum Instantaneous Forward Voltage @ 0.4A	V _F			1.0			V
Maximum DC Reverse Current @ T _A =25°C rated DC blocking voltage per leg T _A = 125°C	I _R			5.0 500			μ A
Typical Thermal Resistance (Note1) (Note2)	R θ _{JA} R θ _{JL}			70 20			°C/W
Operating Temperature Range	T _J			-55 to +150			°C
Storage Temperature Range	T _{STG}			-55 to +150			°C

NOTES: 1. On aluminum substrate P.C.B. with an area of 0.8×0.8"(20×20mm) mounted on 0.05×0.05"(1.3×1.3mm) solder pad.

2. On glass epoxy P.C.B. mounted on 0.05×0.05"(1.3×1.3mm) pads.

RATING AND CHARACTERISTIC CURVES

FIG.1-MAXIMUM NONO-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMELNT

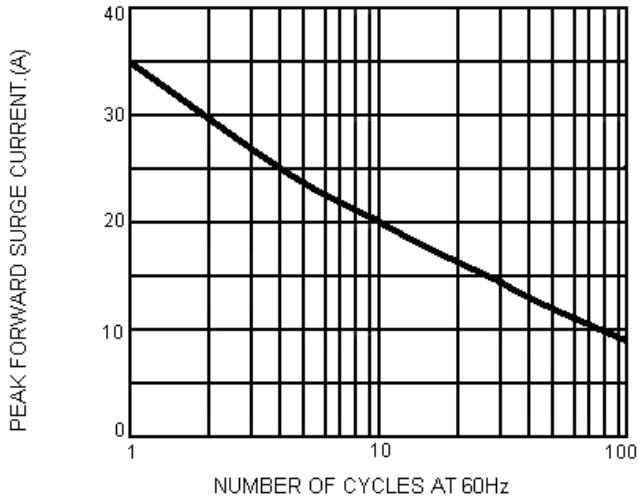


FIG.2-MAXIMUM FORWARD CURRENT DERATING CURVE

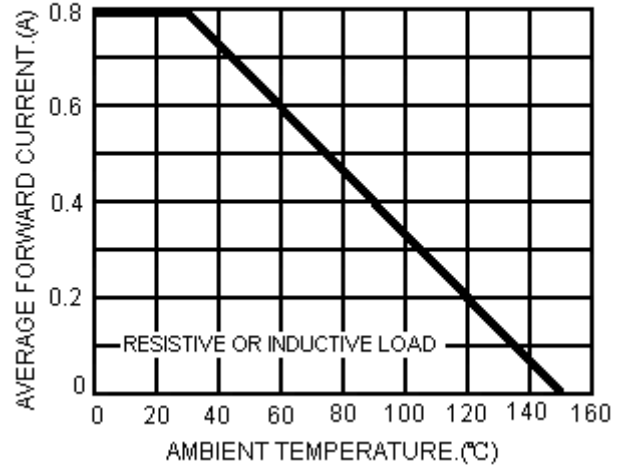


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT


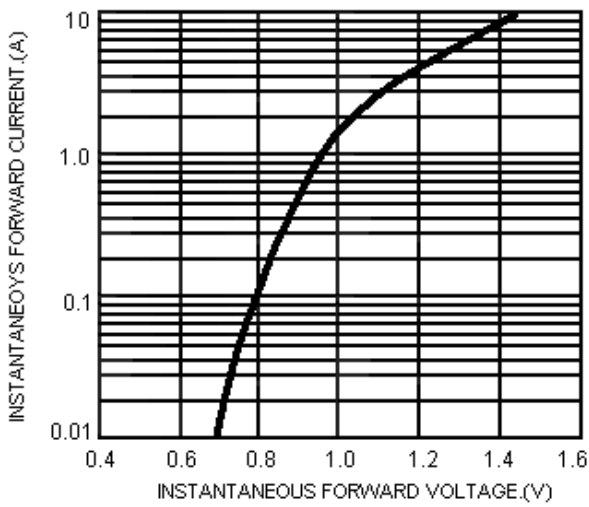


FIG.4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

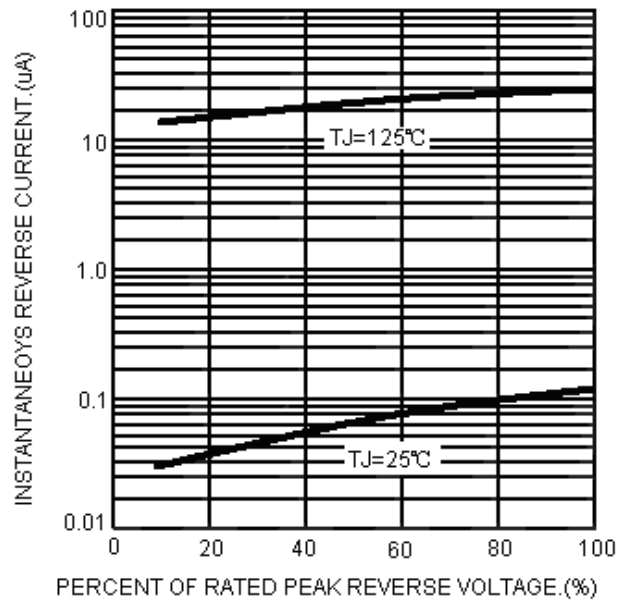

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)