

SILICON PNP POWER TRANSISTORS

... designed for medium-speed switching and amplifier applications

FEATURES

- * Tow Gain Ranges:
hFE(Min)= 15 and 30@ $I_C=3A$ -2N3789,2N3790
25 and 50@ $I_C=1A$ -2N3791,2N3792
- * Excellent Safe Operating Areas
- * Complementary NPN Types Available-2N3713 thru 2N3716


MAXIMUM RATINGS

Characteristic	Symbol	2N3789 2N3791	2N3790 2N3792	Unit
Collector-Base Voltage	V_{CBO}	60	80	V
Collector-Emitter Voltage	V_{CEO}	60	80	V
Emitter-Base Voltage	V_{EBO}	7		V
Collector Current - Continuous	I_C	10		A
Base Current-Continuous	I_B	4		A
Total Power Dissipation @ $T_C=25^\circ C$ Derate above $25^\circ C$	P_D	150 0.857		W W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +200		$^\circ C$

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.17	$^\circ C/W$

FIGURE -1 POWER DERATING

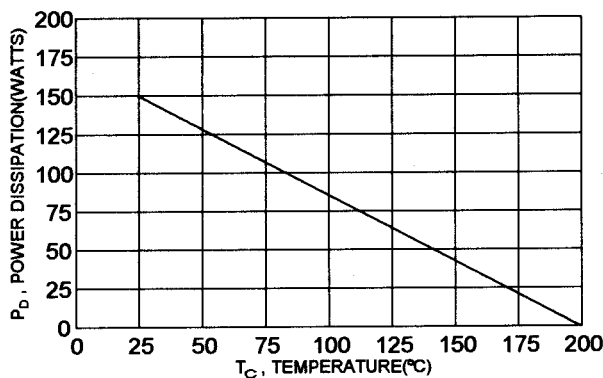


**PNP
2N3789
Thru
2N3792**

**10 AMPER
POWER TRANSISTORS
PNP SILICON
60-80 VOLTS
150 WATTS**



TO-3

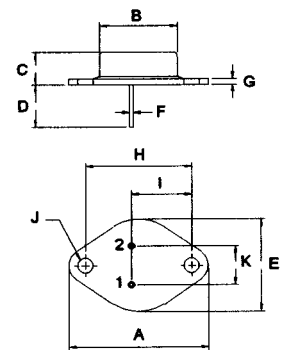

PIN 1.BASE
2.EMITTER
COLLECTOR(CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.20	26.67
F	0.92	1.09
G	1.38	1.62
H	29.90	30.40
I	16.64	17.30
J	3.88	4.36
K	10.67	11.18

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage (1) ($I_C = 200\text{ mA}$, $I_B = 0$)	2N3789, 2N3791 2N3790, 2N3792	$V_{CEO(sus)}$	60 80	V
Collector -Emitter Cutoff Current ($V_{CE} = 60\text{ V}$, $V_{BE(off)} = -1.5\text{ V}$) ($V_{CE} = 80\text{ V}$, $V_{BE(off)} = -1.5\text{ V}$) ($V_{CE} = 60\text{ V}$, $V_{BE(off)} = -1.5\text{ V}$, $T_c = 150^\circ\text{C}$) ($V_{CE} = 80\text{ V}$, $V_{BE(off)} = -1.5\text{ V}$, $T_c = 150^\circ\text{C}$)	2N3789, 2N3791 2N3790, 2N3792 2N3789, 2N3791 2N3790, 2N3792	I_{CEX}	1.0 1.0 5.0 5.0	mA
Emitter-Base Cutoff Current ($V_{EB} = 7.0\text{ V}$, $I_C = 0$)	All Types	I_{EBO}	5.0	mA

ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 1.0\text{ A}$, $V_{CE} = 2.0\text{ V}$) ($I_C = 3.0\text{ A}$, $V_{CE} = 2.0\text{ V}$)	2N3789, 2N3790 2N3791, 2N3792 2N3789, 2N3790 2N3791, 2N3792	h_{FE}	25 50 15 30	90 180	
Collector-Emitter Saturation Voltage ($I_C = 4.0\text{ A}$, $I_B = 0.4\text{ A}$) ($I_C = 5.0\text{ A}$, $I_B = 0.5\text{ A}$)	2N3789, 2N3790 2N3791, 2N3792	$V_{CE(sat)}$		1.0 1.0	V
Base-Emitter On Voltage ($I_C = 5.0\text{ A}$, $V_{CE} = 2.0\text{ V}$) ($I_C = 10\text{ A}$, $V_{CE} = 4.0\text{ V}$)	2N3789, 2N3790 2N3791, 2N3791 All Types	$V_{BE(on)}$		2.0 1.8 4.0	V


DYNAMIC CHARACTERISTICS

Current-Gain Bandwidth Product (2) ($I_C = 500\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 1\text{ MHz}$)	f_T	4.0		MHz
---	-------	-----	--	-----

(1) Pulse Test: Pulse width = 300 us , Duty Cycle $\leq 2.0\%$ (2) $f_T = |h_{fe}| \cdot f_{test}$


2N3789,2N3791

ACTIVE REGION SAFE OPERATING AREA

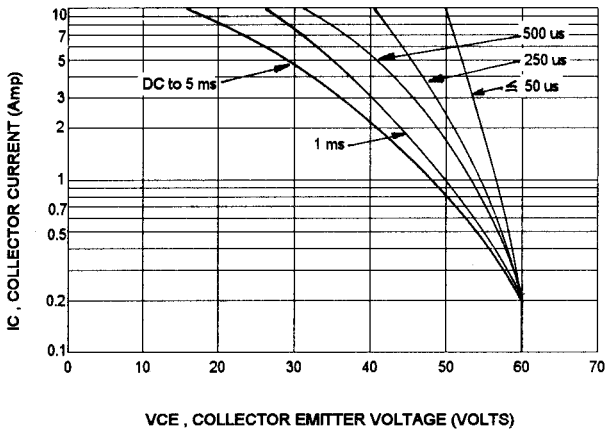


2N3790,2N3792


ACTIVE REGION SAFE OPERATING AREA

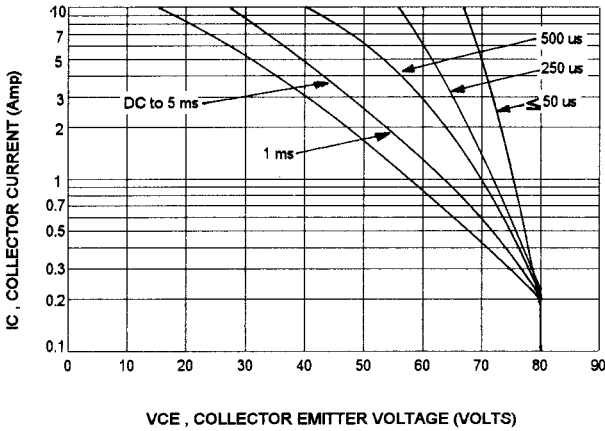


COLLECTOR SATURATION REGION

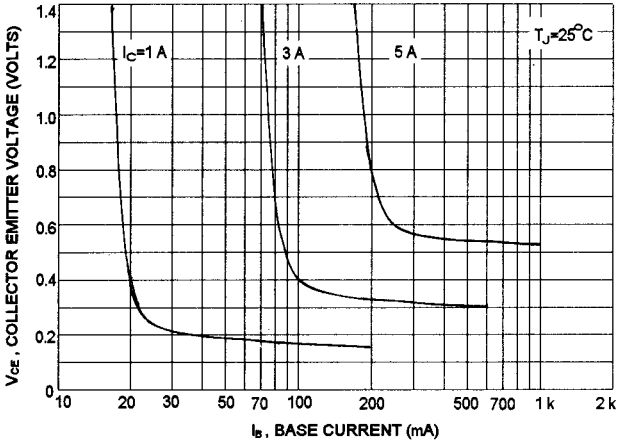


TYPICAL SWITCHING TIME

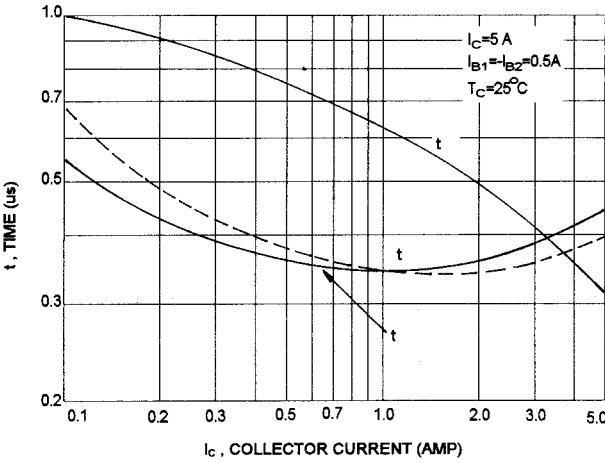

DC CURRENT GAIN

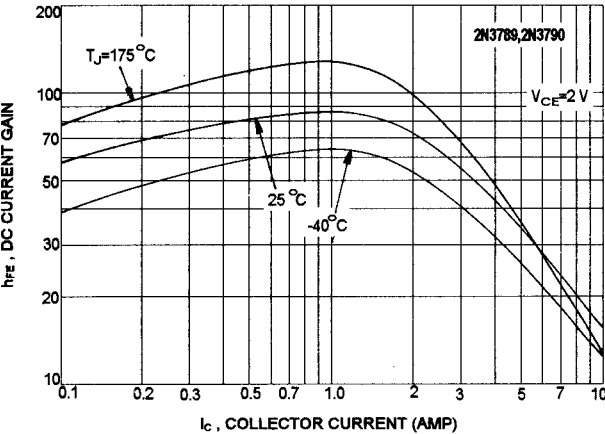

DC CURRENT GAIN

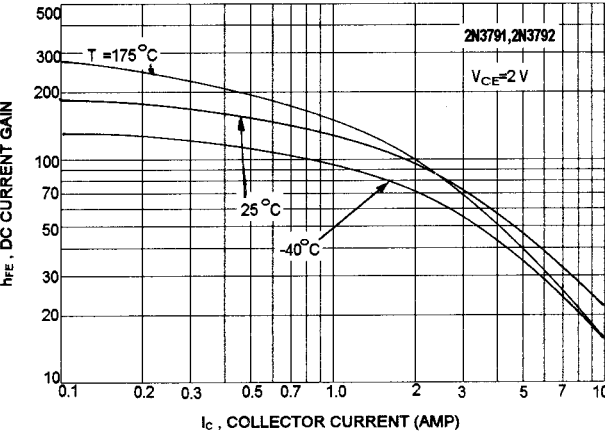

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)