

NPN POWER TRANSISTOR

These devices are high voltage, high speed transistors for horizontal deflection output stages of TV's and CTV's circuits.

FEATURES:


- * Collector-Emitter Sustaining Voltage -
 $V_{CEV} = 330 \text{ V (Min.) - BU407D}$
 $= 400 \text{ V (Min.) - BU406D, BU408D}$
- * Low Saturation Voltage
 $V_{CE(sat)} = 1.0 \text{ V (Max) @ } I_C = 5.0 \text{ A}$
- * Fast Switching Speed: $t_f = 0.75 \text{ us (Max)}$.

MAXIMUM RATINGS

Characteristic	Symbol	BU406D BU408D	BU407D	Unit
Collector-Emitter Voltage	V_{CEO}	200	150	V
Collector-Emitter Voltage	V_{CEV}	400	330	V
Collector-Base Voltage	V_{CBO}	400	330	V
Emitter-Base Voltage	V_{EBO}	6.0		V
Collector Current - Continuous - Peak	I_C	7.0 10		A
Base Current - Continuous	I_B	4.0		A
Total Power Dissipation @ $T_c = 25^\circ\text{C}$ Derate above 25°C	P_D	60 0.48		W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	- 65 to +150		$^\circ\text{C}$


THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	2.08	$^\circ\text{C/W}$

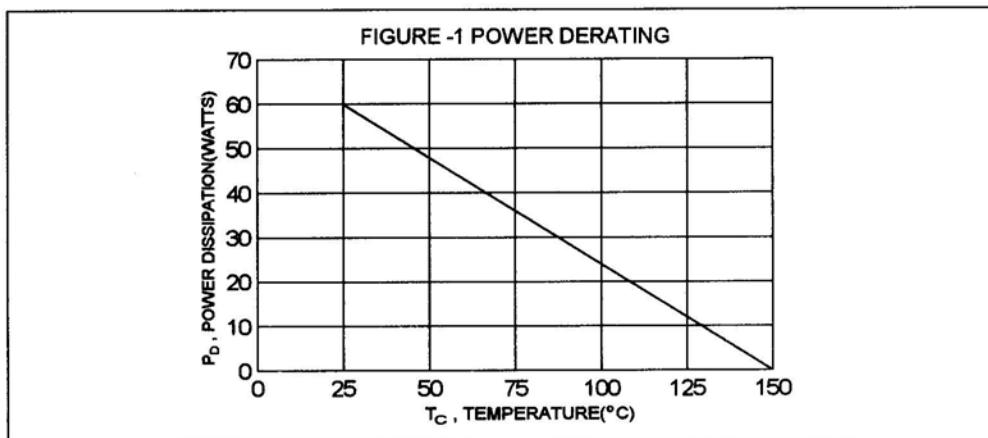


NPN
BU406D
BU407D
BU408D

7 AMPERE
POWER
TRANSISTORS
150-200 VOLTS
60 WATTS



TO-220



PIN 1.BASE
 2.COLLECTOR
 3.EMITTER
 4.COLLECTOR(CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	16.00
B	9.78	10.42
C	5.02	6.60
D	13.00	14.62
E	3.10	4.19
F	2.41	2.67
G	1.10	1.67
H	0.69	1.01
I	3.21	4.98
J	1.14	1.40
K	2.20	3.30
L	0.28	0.61
M	2.48	3.00
O	3.50	4.00

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector - Emitter Sustaining Voltage (1) ($I_c = 100\text{ mA}$, $I_B = 0$)	BU406D, BU408D BU407D	$V_{CE(sus)}$	200 150	V
Collector Cutoff Current ($V_{CE} = 400\text{ V}$, $V_{BE} = -1.5\text{ V}$) ($V_{CE} = 330\text{ V}$, $V_{BE} = -1.5\text{ V}$)	BU406D, BU408D BU407D	I_{CEV}	15 15	mA
Emitter Cutoff Current ($V_{EB} = 6.0\text{ V}$, $I_c = 0$)		I_{EBO}	400	mA

ON CHARACTERISTICS (1)

DC Current Gain ($I_c = 2.0\text{ A}$, $V_{CE} = 5.0\text{ V}$)		hFE	15(typ)	
Collector - Emitter Saturation Voltage ($I_c = 5.0\text{ A}$, $I_B = 0.65\text{ A}$) ($I_c = 6.0\text{ A}$, $I_B = 1.2\text{ A}$)	BU406D, BU407D BU408D	$V_{CE(sat)}$	1.0 1.0	V
Base - Emitter Saturation Voltage ($I_c = 5.0\text{ A}$, $I_B = 0.65\text{ A}$) ($I_c = 6.0\text{ A}$, $I_B = 1.2\text{ A}$)	BU406D, BU407D BU408D	$V_{BE(sat)}$	1.3 1.5	V
Diode Forward Voltage ($I_F = 5.0\text{ A}$,)		V_F	1.5	V

DYNAMIC CHARACTERISTICS


Current Gain - Bandwidth Product ($I_c = 0.5\text{ A}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ MHz}$)		f_T	10	MHz
--	--	-------	----	-----

SWITCHING CHARACTERISTICS


Fall Time ($V_{CC} = 40\text{ V}$, $I_c = 5.0\text{ A}$, $I_{B\text{end}} = 0.65\text{ A}$,) ($V_{CC} = 40\text{ V}$, $I_c = 6.0\text{ A}$, $I_{B\text{end}} = 1.2\text{ A}$,)	BU406D, BU407D BU408D	t_f	0.75 0.5	us
--	--------------------------	-------	-------------	----

(1) Pulse Test: Pulse width $\leq 300\text{ us}$, Duty Cycle $\leq 2.0\%$


DC CURRENT GAIN

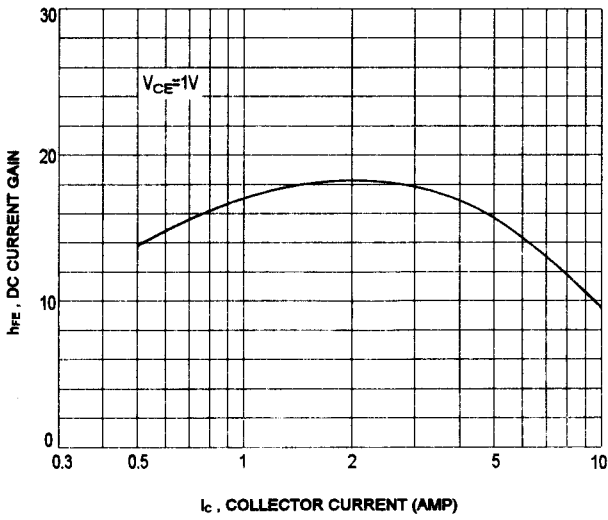


COLLECTOR SATURATION REGION

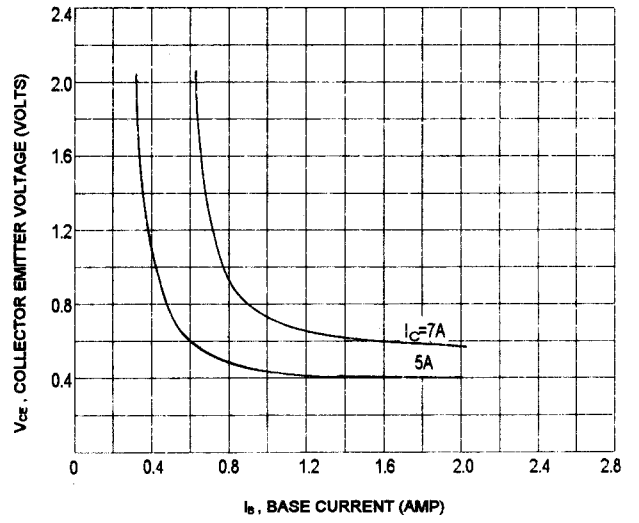

BASE-EMITTER SATURATION VOLTAGE

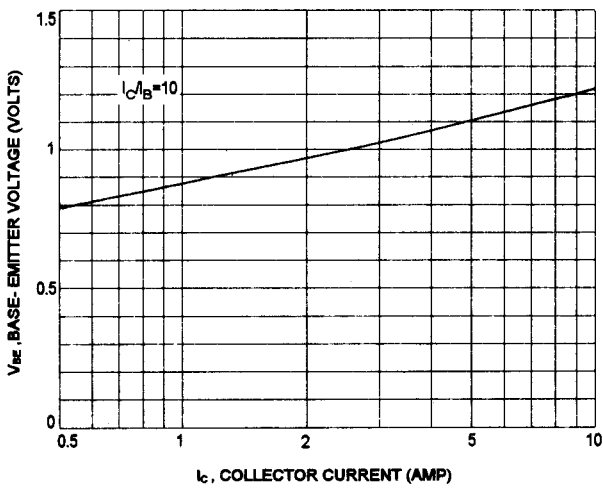

COLLECTOR-EMITTER SATURATION VOLTAGE

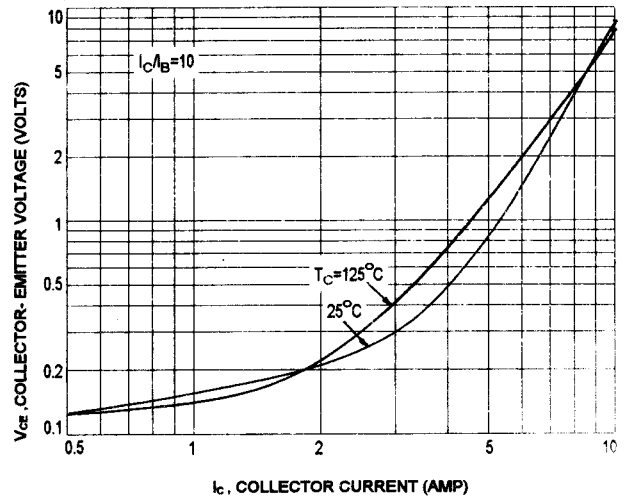

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)