

SWITCHMODE SERIES NPN POWER TRANSISTORS

... designed for use in high-voltage, high-speed, power switching in inductive circuit, they are particularly suited for 220 V switchmode power supply, DC motor control.

FEATURES:

*Collector-Emitter Sustaining Voltage-

$$V_{CEO(sus)} = 400 \text{ V (Min) BUV46}$$

$$= 450 \text{ V (Min) BUV46A}$$

* Collector-Emitter Saturation Voltage -

$$V_{CE(sat)} = 1.5 \text{ V (Max.) @ } I_C = 2.5 \text{ A / 2.0A, } I_B = 0.5 \text{ A / 0.4A}$$


* Switching Time - $t_f = 0.8 \text{ us (Max.) @ } I_C = 2.5\text{A/2.0A}$

NPN
BUV46
BUV46A


6 AMPERE
POWER
TRANSISTORS
400-450 VOLTS
70 WATTS

MAXIMUM RATINGS

Characteristic	Symbol	BUV46	BUV46A	Unit
Collector-Emitter Voltage	V_{CEO}	400	450	V
Collector-Emitter Voltage	V_{CEX}	850	1000	V
Emitter-Base Voltage	V_{EBO}	7.0		V
Collector Current - Continuous	I_C	6.0		A
- Peak	I_{CM}	8.0		A
Base current	I_B	2.0		A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$	P_D	70		W
Derate above 25°C		0.56		W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +150		$^\circ\text{C}$



TO-220




PIN 1.BASE
2.COLLECTOR
3.EMITTER
4.COLLECTOR(CASE)

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.78	$^\circ\text{C/W}$

FIGURE -1 POWER DERATING

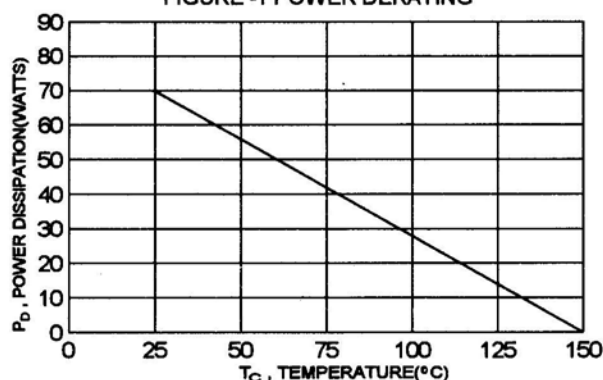

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	16.00
B	9.78	10.42
C	5.02	6.60
D	13.00	14.62
E	3.10	4.19
F	2.41	2.67
G	1.10	1.67
H	0.69	1.01
I	3.21	4.98
J	1.14	1.40
K	2.20	3.30
L	0.28	0.61
M	2.48	3.00
O	3.50	4.00

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage ($I_c = 0.2\text{ A}$, $I_B = 0$, $L = 25\text{ mH}$) BUV46 BUV46A	$V_{CE(sus)}$	400 450		V
Collector Cutoff Current ($V_{CE} = 850\text{ V}$, $R_{BE} \leq 10\text{ ohm}$) ($V_{CE} = 1000\text{ V}$, $R_{BE} \leq 10\text{ ohm}$) BUV46 BUV46A	I_{CER}		300 300	μA
Collector Cutoff Current ($V_{CE} = 850\text{ V}$, $V_{BE} = -2.5\text{ V}$) ($V_{CE} = 1000\text{ V}$, $V_{BE} = -2.5\text{ V}$) BUV46 BUV46A	I_{CEX}		100 100	μA
Emitter Cutoff Current ($V_{EB} = 7.0\text{ V}$, $I_c = 0$)	I_{EBO}		1.0	mA

ON CHARACTERISTICS (1)


Collector-Emitter Saturation Voltage ($I_c = 2.5\text{ A}$, $I_B = 0.5\text{ A}$) ($I_c = 2.0\text{ A}$, $I_B = 0.4\text{ A}$) ($I_c = 3.5\text{ A}$, $I_B = 0.7\text{ A}$) ($I_c = 3.0\text{ A}$, $I_B = 0.6\text{ A}$) BUV46 BUV46A BUV46 BUV46A	$V_{CE(sat)}$		1.5 1.5 5.0 5.0	V
Base-Emitter Saturation Voltage ($I_c = 2.5\text{ A}$, $I_B = 0.5\text{ A}$) ($I_c = 2.0\text{ A}$, $I_B = 0.4\text{ A}$) BUV46 BUV46A	$V_{BE(sat)}$		1.3 1.3	V

SWITCHING CHARACTERISTICS


On Time	$V_{CC} = 150\text{V}$	$I_c = 2.5\text{A}$, $I_{B1} = -I_{B2} = 0.5\text{A}$ BUV46 $I_c = 2.0\text{A}$, $I_{B1} = -I_{B2} = 0.4\text{A}$ BUV46A	t_{on}		1.0	μs
Storage Time			t_s		3.0	μs
Fall Time			t_f		0.8	μs

(1) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$


DC CURRENT GAIN

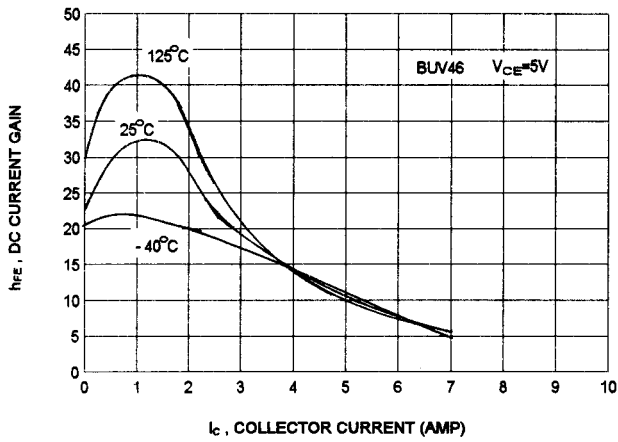


COLLECTOR SATURATION REGION

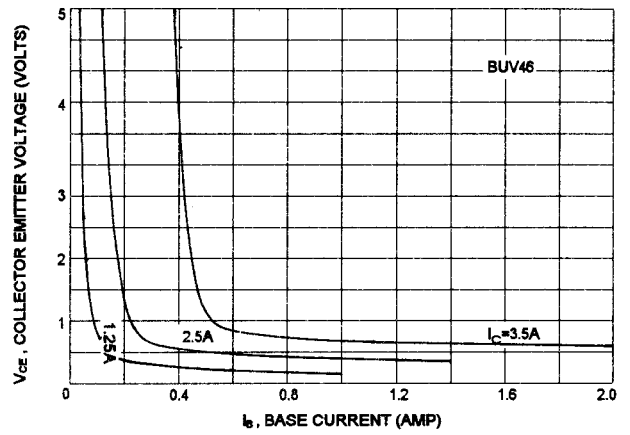


BASE-EMITTER SATURATION VOLTAGE

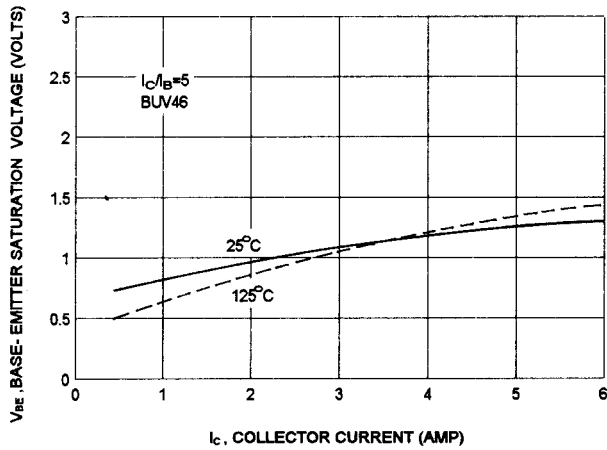


COLLECTOR-EMITTER SATURATION VOLTAGE

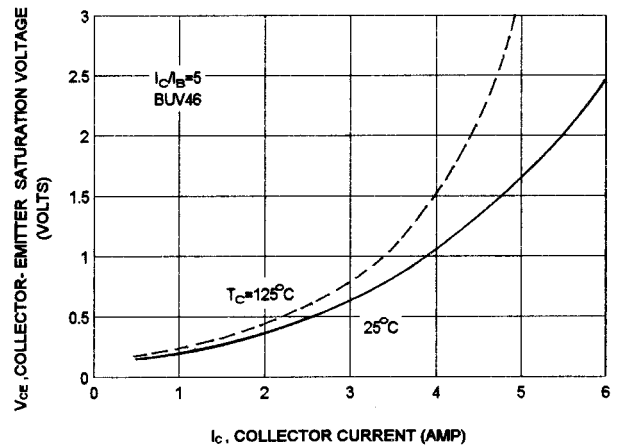

SWITCHING TIME

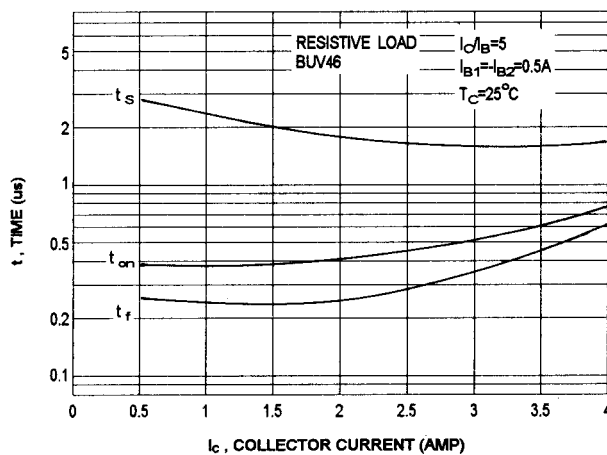

ACTIVE-REGION SAFE OPERATING AREA

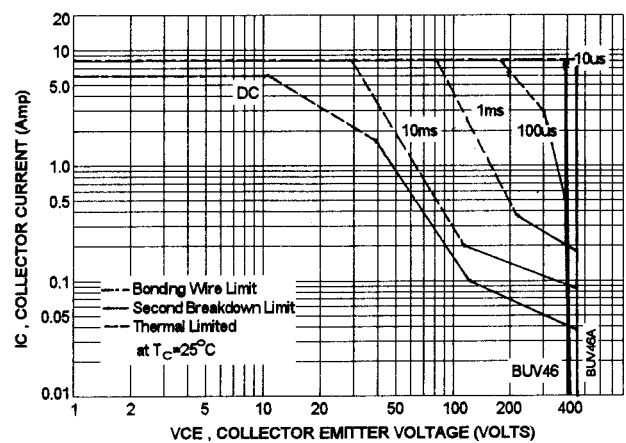

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)