

HIGH VOLTAGE POWER SWITCH

... designed for horizontal deflection output stage of CTV receivers and high voltage, fast switching and industrial application.

FEATURES

* Collector-Emitter Sustaining Voltage-100 mA

$V_{CEO(sus)} = 400V$ (Min) BUY69A
 325V (Min) BUY69B
 200V (Min) BUY69C

* Optimum Drive Condition Curves


MAXIMUM RATINGS

Characteristic	Symbol	BUY69A	BUY69B	BUY69C	Unit
Collector-Emitter Voltage($V_{BE}=0$)	V_{CBS}	1000	800	500	V
Collector-Emitter Voltage	V_{CEO}	400	325	200	V
Emitter-Base Voltage	V_{EBO}	8.0			V
Collector Current - Continuous - Peak	I_C I_{CM}	10 15			A
Base Current-Peak	I_B	3.0			A
Total Power Dissipation @ $T_C = 25^\circ C$ Derate above $25^\circ C$	P_D	100 0.57			W W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +200			$^\circ C$

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	UNIT
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.75	$^\circ C/W$

FIGURE -1 POWER DERATING

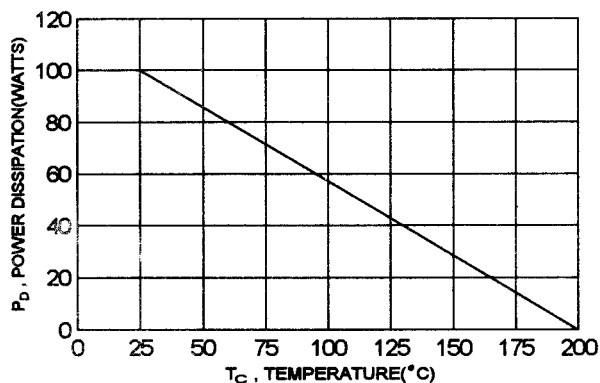


NPN
BUY69A
BUY69B
BUY69C

10 AMPERE
 SILICON POWER
 TRANSISTORS
 200-400 VOLTS
 100 WATTS



TO-3



PIN 1.BASE
 2.EMITTER
 COLLECTOR(CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.20	26.67
F	0.92	1.09
G	1.38	1.62
H	29.90	30.40
I	16.64	17.30
J	3.88	4.36
K	10.67	11.18

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage(1) ($I_C = 100\text{ mA}$, $I_B = 0$)	BUY69A BUY69B BUY69C	$V_{CEO(sus)}$	400 325 200	V
Collector-Base Voltage ($I_C = 1.0\text{ mA}$, $I_E = 0$)	BUY69A BUY69B BUY69C	V_{CBO}	1000 800 500	V
Collector Cutoff Current ($V_{CE} = 1000\text{ V}$, $V_{BE} = 0$) ($V_{CE} = 800\text{ V}$, $V_{BE} = 0$) ($V_{CE} = 500\text{ V}$, $V_{BE} = 0$)	BUY69A BUY69B BUY69C	I_{CES}	1.0 1.0 1.0	mA
Emitter -Base Cutoff Current ($V_{EB} = 8.0\text{ V}$, $I_C = 0$)		I_{EBO}	1.0	mA

ON CHARACTERISTICS (1)

DC Current Gain ($V_{CE} = 10\text{ V}$, $I_C = 2.5\text{ A}$)	h_{FE}	15		
Collector-Emitter Saturation Voltage ($I_C = 8.0\text{ A}$, $I_B = 2.5\text{ A}$)	$V_{CE(sat)}$		3.3	V
Base-Emitter Saturation Voltage ($I_C = 8.0\text{ A}$, $I_B = 2.5\text{ A}$)	$V_{BE(sat)}$		2.2	V

DYNAMIC CHARACTERISTICS

Current Gain-Bandwidth Product (2) ($I_C = 500\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 1\text{ MHz}$)	f_T	10		MHz
---	-------	----	--	-----

SWITCHING CHARACTERISTICS

Rise Time	$V_{CC} = 250\text{ V}$, $I_C = 5\text{ A}$ $I_{B1} = -I_{B2} = 1.0\text{ A}$	t_r	0.3	us
Storage Time		t_s	1.8	us
Fall Time		t_f	1.0	us

(1) Pulse Test: Pulse width = 300 us , Duty Cycle $\leq 2.0\%$ (2) $f_T = |h_{fe}| \cdot f_{test}$

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)