

SILICON POWER TRANSISTORS

The MJ15022 and MJ15024 are power base power transistors designed for high power audio, disk head positioners and other linear applications.

FEATURES

- * High Safe Operating Area
- * High DC Current Gain-
 $h_{FE} = 15(\text{Min}) @ I_C = 8.0 \text{ A } V_{CE} = 4.0 \text{ V}$


MAXIMUM RATINGS

Characteristic	Symbol	MJ15022	MJ15024	Unit
Collector-Emitter Voltage	V_{CEO}	200	250	V
Collector-Base Voltage	V_{CBO}	350	400	V
Emitter-Base Voltage	V_{EBO}	5.0		V
Collector-Emitter Voltage	V_{CEX}	400		V
Collector Current - Continuous - Peak	I_C I_{CM}	16 30		A
Base Current-Continuous	I_B	5		A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	250 1.43		W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +200		$^\circ\text{C}$

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	UNIT
Thermal Resistance Junction to Case	$R_{\theta jc}$	0.7	$^\circ\text{C}/\text{W}$

FIGURE -1 POWER DERATING

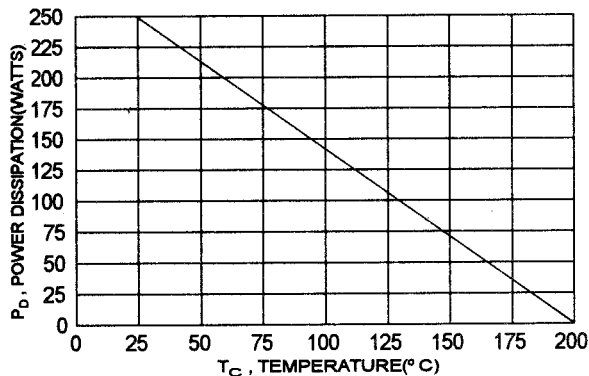


NPN
MJ15022
MJ15024

16 AMPERE
SILICON POWER
TRANSISTORS
200 - 250 VOLTS
250 WATTS



TO-3



PIN 1. BASE
 2. EMITTER
 COLLECTOR (CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.20	26.67
F	0.92	1.09
G	1.38	1.62
H	29.90	30.40
I	16.64	17.30
J	3.88	4.36
K	10.67	11.18

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage(1) ($I_C = 100\text{ mA}$, $I_B = 0$)	MJ15022 MJ15024	$V_{CEO(sus)}$	200 250	V
Collector Cutoff Current ($V_{CE} = 200\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$) ($V_{CE} = 250\text{ V}$, $V_{BE(off)} = 1.5\text{ V}$)	MJ15022 MJ15024	I_{CEX}	250 250	μA
Collector Cutoff Current ($V_{CE} = 150\text{ V}$, $I_B = 0$) ($V_{CE} = 200\text{ V}$, $I_B = 0$)	MJ15022 MJ15024	I_{CEO}	500 500	μA
Emitter Cutoff Current ($V_{EB} = 5.0\text{ V}$, $I_B = 0$)		I_{EBO}	500	μA

ON CHARACTERISTICS (1)


DC Current Gain ($I_C = 8.0\text{ A}$, $V_{CE} = 4.0\text{ V}$) ($I_C = 16\text{ A}$, $V_{CE} = 4.0\text{ V}$)	h_{FE}	15 5	60	
Collector-Emitter Saturation Voltage ($I_C = 8.0\text{ A}$, $I_B = 0.8\text{ A}$) ($I_C = 16\text{ A}$, $I_B = 3.2\text{ A}$)	$V_{CE(sat)}$		1.4 4.0	V
Base-Emitter On Voltage ($I_C = 8.0\text{ A}$, $V_{CE} = 4.0\text{ V}$)	$V_{BE(on)}$		2.2	V

DYNAMIC CHARACTERISTICS


Current-Gain-Bandwidth Product (2) ($I_C = 1.0\text{ A}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ MHz}$)	f_T	4.0		MHz
Output Capacitance ($V_{CB} = 10\text{ V}$, $I_E = 0$, $f = 1.0\text{ MHz}$)	C_{ob}		500	pF

(1) Pulse Test: Pulse width = 300 μs , Duty Cycle $\leq 2.0\%$ (2) $f_T = |h_{fe}| \cdot f_{test}$


DC CURRENT GAIN

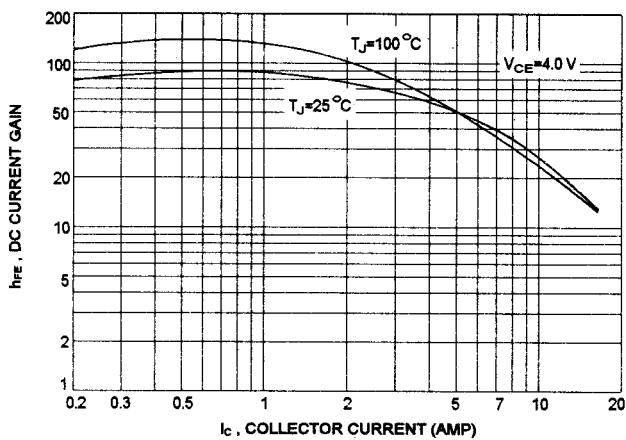


"ON" VOLTAGE

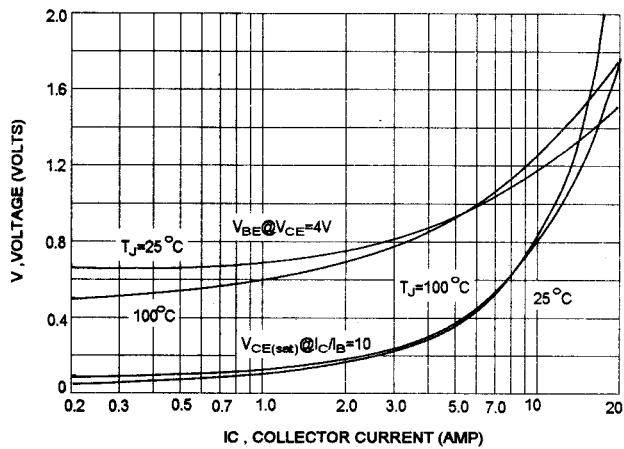


CAPACITANCES

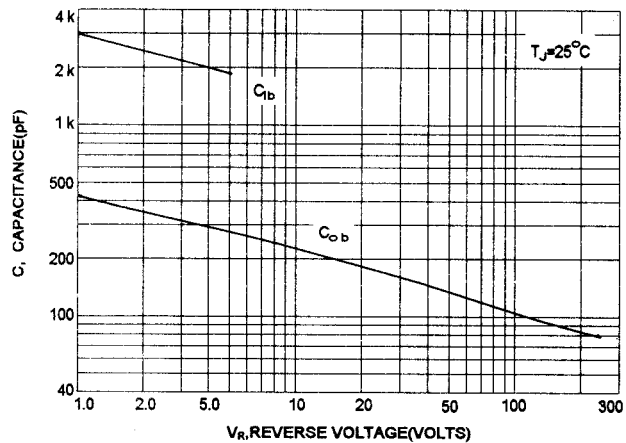


CURRENT GAIN- BANDWIDTH PRODUCT

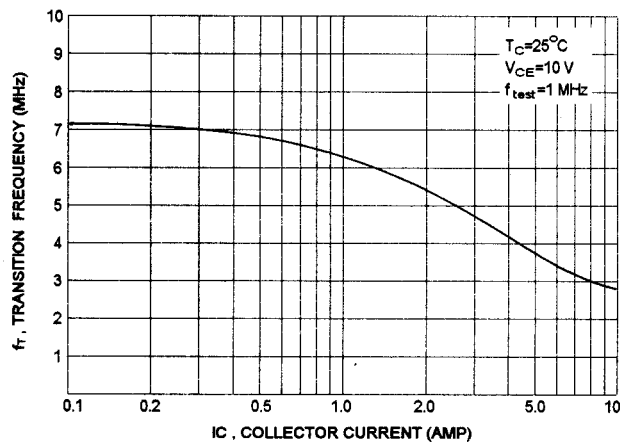

ACTIVE-REGION SAFE OPERATING AREA

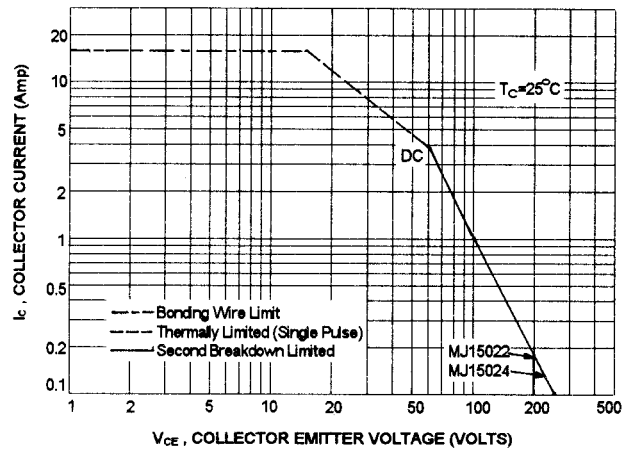

COLLECTOR SATURATION REGION

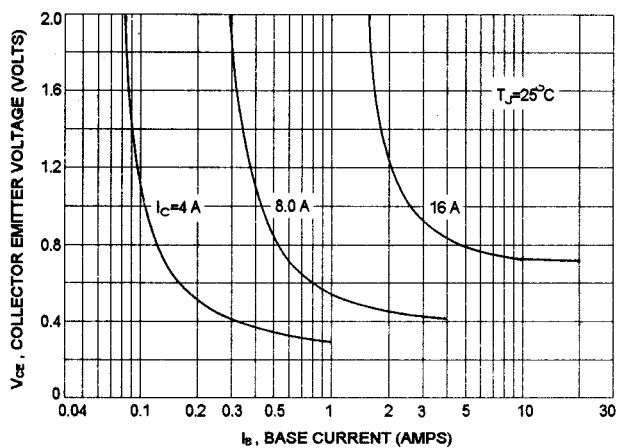

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)