

HIGH-POWER NPN SILICON TRANSISTOR

...for use as an output device in complementary audio amplifiers to 100-Watts music power per channel.

FEATURES

- * Continuous Collector Current- $I_C = 30A$
- * High DC Current Gain- $hFE = 25-100 @ I_C = 7.5A$
- * Excellent Safe Operating Area
 $V_{CE(sat)} = 0.8V(Max) @ I_C = 7.5A, I_B = 750mA$
- * Complement to the PNP MJ4502


MAXIMUM RATINGS

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CBO}	100	V
Collector-Emitter Voltage	V_{CER}	100	V
Collector-Emitter Voltage	V_{CEO}	90	V
Emitter-Base Voltage	V_{EBO}	4.0	V
Collector Current - Continuous	I_C	30	A
Base Current-Continuous	I_B	7.5	A
Total Power Dissipation @ $T_C = 25^\circ C$ Derate above $25^\circ C$	P_D	200 1.14	W W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +200	$^\circ C$

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	0.875	$^\circ C/W$

FIGURE -1 POWER DERATING

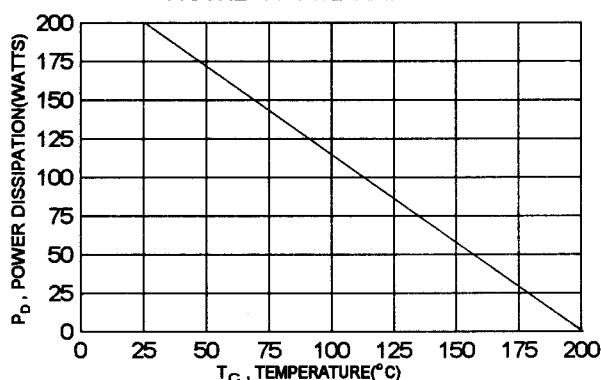


**NPN
MJ802**

**30 AMPERE
POWER TRANSISTOR
NPN SILICON
100 VOLTS
200 WATTS**



TO-3

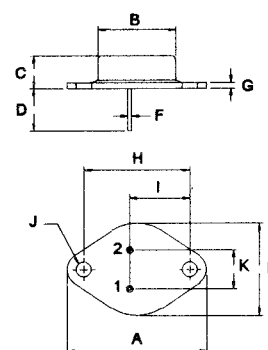

PIN 1.BASE
2.EMITTER
COLLECTOR(CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.20	26.67
F	0.92	1.09
G	1.38	1.62
H	29.90	30.40
I	16.64	17.30
J	3.88	4.36
K	10.67	11.18

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage(1) ($I_C = 200\text{ mA}$, $I_B = 0$)	$V_{CEO(sus)}$	90		V
Collector-Emitter Breakdown Voltage(1) ($I_C = 200\text{ mA}$, $R_{BE} = 100\text{ ohm}$)	BV_{CER}	100		V
Collector Cutoff Current ($V_{CB} = 100\text{ V}$, $I_E = 0$) ($V_{CB} = 100\text{ V}$, $I_E = 0$, $T_C = 150^\circ\text{C}$)	I_{CBO}		1.0 5.0	mA
Emitter Cutoff Current ($V_{BE} = 4.0\text{ V}$, $I_C = 0$)	I_{EBO}		1.0	mA

ON CHARACTERISTICS (1)


DC Current Gain ($I_C = 7.5\text{ A}$, $V_{CE} = 2.0\text{ V}$)	h_{FE}	25	100	
Collector-Emitter Saturation Voltage ($I_C = 7.5\text{ A}$, $I_B = 0.75\text{ A}$)	$V_{CE(sat)}$		0.8	V
Base-Emitter Saturation Voltage ($I_C = 7.5\text{ A}$, $I_B = 0.75\text{ A}$)	$V_{BE(sat)}$		1.3	V
Base-Emitter On Voltage ($I_C = 7.5\text{ A}$, $V_{CE} = 2.0\text{ V}$)	$V_{BE(on)}$		1.3	V

DYNAMIC CHARACTERISTICS


Current-Gain Bandwidth Product ($I_C = 1.0\text{ A}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ MHz}$)	f_T	2.0		MHz
--	-------	-----	--	-----

(1) Pulse Test: Pulse width = $300\text{ }\mu\text{s}$, Duty Cycle $\leq 2.0\%$


DC CURRENT GAIN

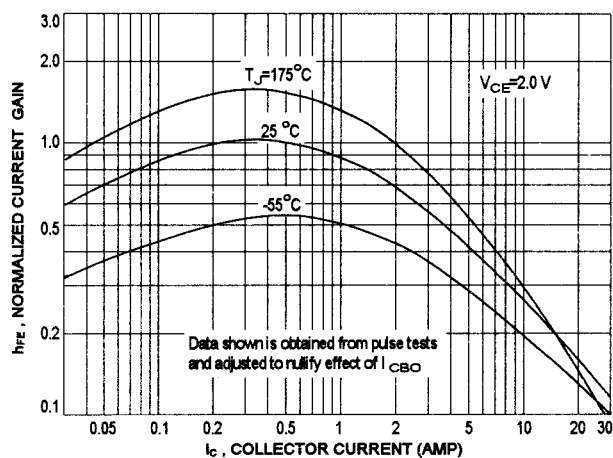

"ON" VOLTAGE

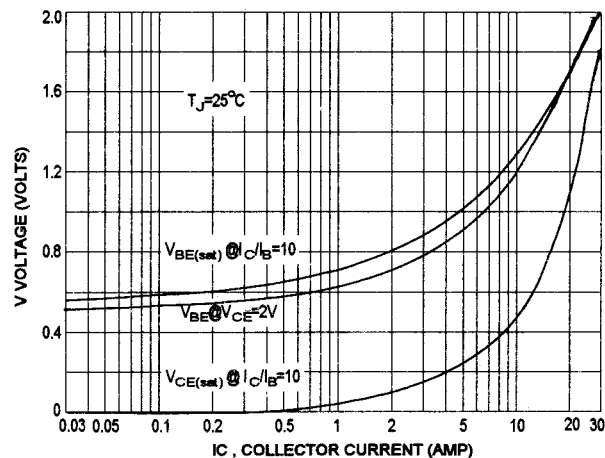

ACTIVE-REGION SAFE OPERATING AREA (SOA)

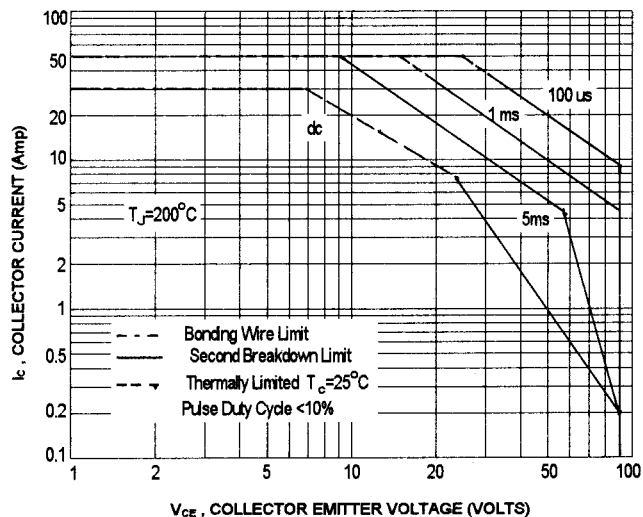

The safe Operating Area Curves indicate I_C - V_{CE} limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operating below the maximum T_J , power-temperature derating must be observed for both steady state and pulse power conditions.

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)