

HIGH-POWER NPN SILICON TRANSISTORS

... designed for use in industrial power amplifiers and switching circuit applications.

FEATURES:


- * High DC Current Gain
 $h_{FE}=30-120 @ I_C=10A$
 $=12 \text{ (Min)} @ I_C=25A$
- * Low Collector-Emitter Saturation Voltage
 $V_{CE(SAT)} = 1.0V \text{ (Max.)} @ I_C = 10 A, I_B = 1.0A$
- * Complement to 2N6436-38

MAXIMUM RATINGS

Characteristic	Symbol	2N6338	2N6339	2N6340	2N6341	Unit
Collector-Emitter Voltage	V_{CEO}	100	120	140	150	V
Collector-Base Voltage	V_{CBO}	120	140	160	180	V
Emitter-Base Voltage	V_{EBO}	6.0				V
Collector Current-Continuous -Peak	I_C	25 50				A
Base Current	I_B	10				A
Total Power Dissipation @ $T_C=25^\circ C$ Derate above $25^\circ C$	P_D	200 1.14				W W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +200				$^\circ C$


THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	0.875	$^\circ C/W$

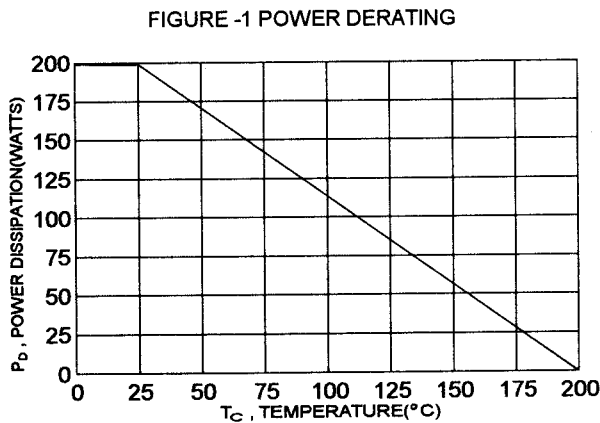


NPN
2N6338
2N6339
2N6340
2N6341

25 AMPERE
POWER TRANSISTOR
NPN SILICON
100-150 VOLTS
200 WATTS



TO-3



PIN 1.BASE
 2.EMITTER
 COLLECTOR (CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.20	26.67
F	0.92	1.09
G	1.38	1.62
H	29.90	30.40
I	16.64	17.30
J	3.88	4.36
K	10.67	11.18

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector -Emitter Sustaining Voltage (1) ($I_c = 50\text{mA}$, $I_B = 0$)	2N6338 2N6339 2N6340 2N6341	$V_{CE(sus)}$	100 120 140 150	V
Collector Cutoff Current ($V_{CE} = 50\text{V}$, $I_B = 0$) ($V_{CE} = 60\text{V}$, $I_B = 0$) ($V_{CE} = 70\text{V}$, $I_B = 0$) ($V_{CE} = 75\text{V}$, $I_B = 0$)	2N6338 2N6339 2N6340 2N6341	I_{CEO}	50 50 50 50	μA
Collector Cutoff Current ($V_{CB} = \text{Rated } V_{CB}$, $I_E = 0$)		I_{CBO}	10	μA
Emitter Cutoff Current ($V_{EB} = 6.0\text{V}$, $I_C = 0$)		I_{EBO}	100	μA

ON CHARACTERISTICS (1)

DC Current Gain ($I_c = 0.5\text{A}$, $V_{CE} = 2.0\text{V}$) ($I_c = 10\text{A}$, $V_{CE} = 2.0\text{V}$) ($I_c = 25\text{A}$, $V_{CE} = 2.0\text{V}$)		h_{FE}	50 30 12	120	
Collector-Emitter Saturation Voltage ($I_c = 10\text{A}$, $I_B = 1.0\text{A}$) ($I_c = 25\text{A}$, $I_B = 2.5\text{A}$)		$V_{CE(sat)}$	1.0 1.8		V
Base-Emitter Saturation Voltage ($I_c = 10\text{A}$, $I_B = 1.0\text{A}$) ($I_c = 25\text{A}$, $I_B = 2.5\text{A}$)		$V_{BE(sat)}$	1.8 2.5		V
Base-Emitter On Voltage ($I_c = 10\text{A}$, $V_{CE} = 2.0\text{V}$)		$V_{BE(on)}$	1.8		V

DYNAMIC CHARATERISTICS

Current-Gain Bandwidth Product (2) ($I_c = 1.0\text{A}$, $V_{CE} = 10\text{V}$, $f = 10\text{MHz}$)		f_T	40		MHz
Output Capacitance ($V_{CB} = 10\text{V}$, $I_E = 0$, $f = 0.1\text{MHz}$)		C_{ob}	300		pF


SWTCHING CHARACTERISTICS

Rise Time	$V_{CC} = 80\text{V}$, $I_c = 10\text{A}$ $I_{B1} = -I_{B2} = 1\text{A}$ $V_{BE(off)} = 6\text{V}$	t_r	0.4	μs
Storage Time		t_s	1.5	μs
Fall Time		t_f	0.6	μs


(1) Pulse Test: Pulse width = $300\ \mu\text{s}$, Duty Cycle $\leq 2.0\%$

(2) $f_T = |h_{fe}| \cdot f_{test}$


TURN-ON TIME

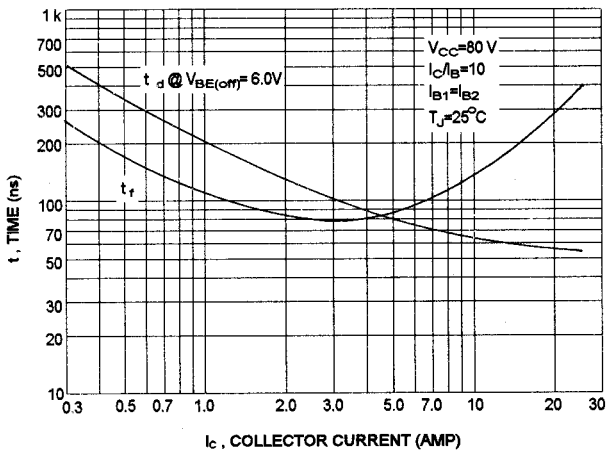


CAPACITANCES

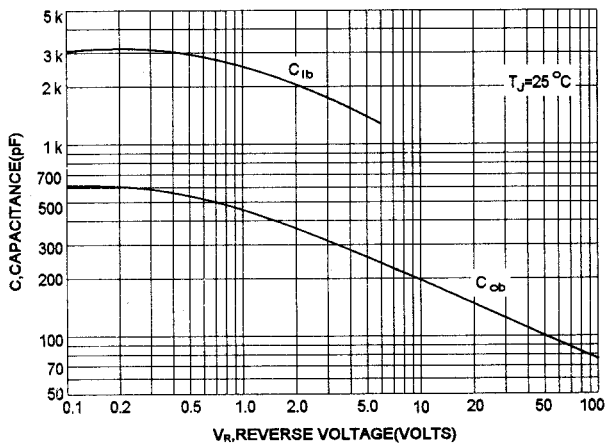

TURN-OFF TIME

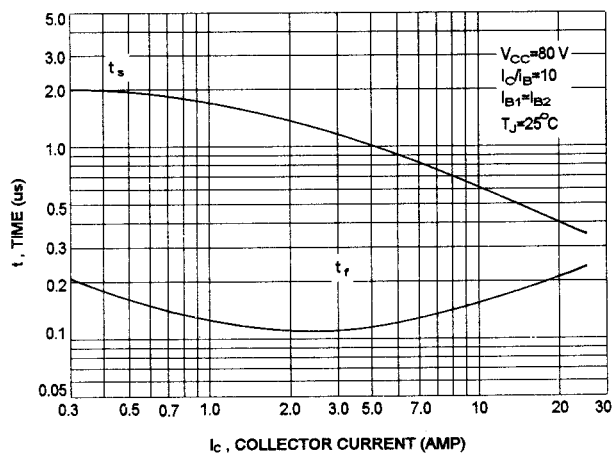

ACTIVE-REGION SAFE OPERATING AREA (SOA)

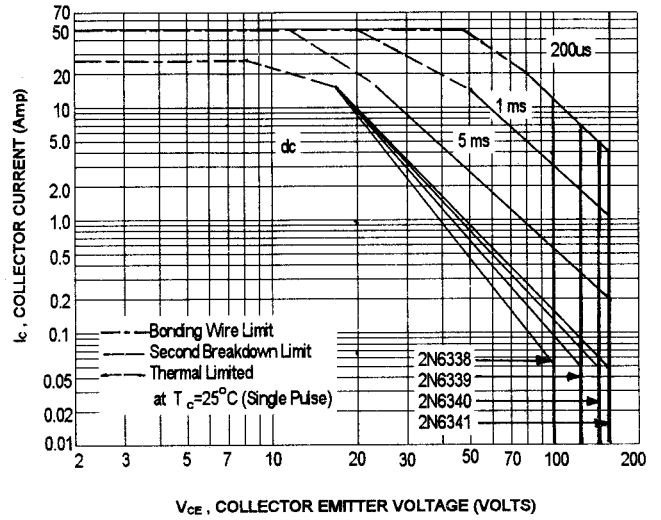

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of SOA curve is base on $T_{J(PK)} = 200^\circ C$; T_c is variable depending on conditions. second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(PK)} \leq 200^\circ C$. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)