

COMPLEMENTARY SILICON HIGH-VOLTAGE HIGH-POWER TRANSISTORS

... designed for use in high power audio amplifier applications and high voltage switching regulator circuits.

FEATURES:

* Collector-Emitter Sustaining Voltage -

$V_{CE(sus)} = 100V(\text{Min})$ - MJE4340,MJE4350

120V(Min)- MJE4341,MJE4351

140V(Min)- MJE4342,MJE4352

160V(Min)-MJE4343,MJE4353

* DC Current Gain $hFE=8.0(\text{Min})@I_C = 16A$

* Current Gain-Bandwidth Product $f_T=1.0\text{ MHz}(\text{Min})@I_C=1.0A$


MAXIMUM RATINGS

Characteristic	Symbol	MJE4340 MJE4350	MJE4341 MJE4351	MJE4342 MJE4352	MJE4343 MJE4353	Unit
Collector-Emitter Voltage	V_{CEO}	100	120	140	160	V
Collector-Base Voltage	V_{CBO}	100	120	140	160	V
Emitter-Base Voltage	V_{EBO}	7.0				V
Collector Current - Continuous - Peak	I_C	16 20				A
Base Current	I_B	5.0				A
Total Power Dissipation@ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	125 1.0				W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +150				$^\circ\text{C}$

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.0	$^\circ\text{C/W}$

FIGURE -1 POWER DERATING

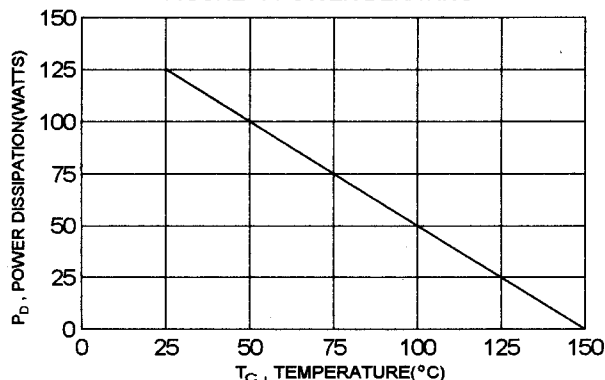


NPN	PNP
MJE4340	MJE4350
MJE4341	MJE4351
MJE4342	MJE4352
MJE4343	MJE4353

16 AMPERE
COMPLEMENTARY SILICON
POWER TRANSISTORS
100 -160 VOLTS
125 WATTS



TO-247(3P)



PIN 1.BASE
2.COLLECTOR
3.EMITTER

DIM	MILLIMETERS	
	MIN	MAX
A	20.63	22.38
B	15.38	16.20
C	1.90	2.70
D	5.10	6.10
E	14.81	15.22
F	11.72	12.84
G	4.20	4.50
H	1.82	2.46
I	2.92	3.23
J	0.89	1.53
K	5.26	5.66
L	18.50	21.50
M	4.68	5.36
N	2.40	2.80
O	3.25	3.65
P	0.55	0.70

MJE4340 Thru MJE4343 NPN / MJE4350 Thru MJE4353 PNP

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage(1) ($I_C = 100\text{ mA}$, $I_B = 0$) MJE4340,MJE4350 MJE4341,MJE4351 MJE4342,MJE4352 MJE4343,MJE4353	$V_{CE(sus)}$	100 120 140 160		V
Collector Cutoff Current ($V_{CE} = 50\text{ V}$, $I_B = 0$) ($V_{CE} = 60\text{ V}$, $I_B = 0$) ($V_{CE} = 70\text{ V}$, $I_B = 0$) ($V_{CE} = 80\text{ V}$, $I_B = 0$) MJE4340,MJE4350 MJE4341,MJE4351 MJE4342,MJE4352 MJE4343,MJE4353	I_{CEO}		0.75 0.75 0.75 0.75	mA
Collector Cutoff Current ($V_{CE} = \text{Rated } V_{CBO}$, $V_{EB(off)} = 1.5\text{ V}$) ($V_{CE} = \text{Rated } V_{CBO}$, $V_{EB(off)} = 1.5\text{ V}$, $T_c = 150^\circ\text{C}$)	I_{CEX}		1.0 5.0	mA
Collector Cutoff Current ($V_{CB} = \text{Rated } V_{CB}$, $I_E = 0$)	I_{CBO}		0.75	mA
Emitter Cutoff Current ($V_{EB} = 7.0\text{ V}$, $I_C = 0$)	I_{EBO}		1.0	mA

ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 8.0\text{ A}$, $V_{CE} = 2.0\text{ V}$,) ($I_C = 16\text{ A}$, $V_{CE} = 4.0\text{ V}$,)	h_{FE}	15 8.0		
Collector-Emitter Saturation Voltage ($I_C = 8.0\text{ A}$, $I_B = 800\text{ mA}$) ($I_C = 16\text{ A}$, $I_B = 2.0\text{ A}$)	$V_{CE(sat)}$		2.0 3.5	V
Base-Emitter Saturation Voltage ($I_C = 16\text{ A}$, $I_B = 2.0\text{ A}$)	$V_{BE(sat)}$		3.9	V
Base-Emitter On Voltage ($I_C = 16\text{ A}$, $V_{CE} = 4.0\text{ V}$)	$V_{BE(on)}$		3.9	V


DYNAMIC CHARACTERISTICS

Current Gain - Bandwidth Product (2) ($I_C = 1.0\text{ A}$, $V_{CE} = 20\text{ V}$, $f = 0.5\text{ MHz}$)	f_T	1.0		MHz
Output Capacitance ($V_{CB} = 10\text{ V}$, $I_E = 0$, $f = 0.1\text{ MHz}$)	C_{ob}		800	pF

(1) Pulse Test: Pulse width $\leq 300\text{ us}$, Duty Cycle $\leq 2.0\%$

(2) $f_T = |h_{fe}| \cdot f_{TEST}$


ACTIVE-REGION SAFE OPERATING AREA (SOA)

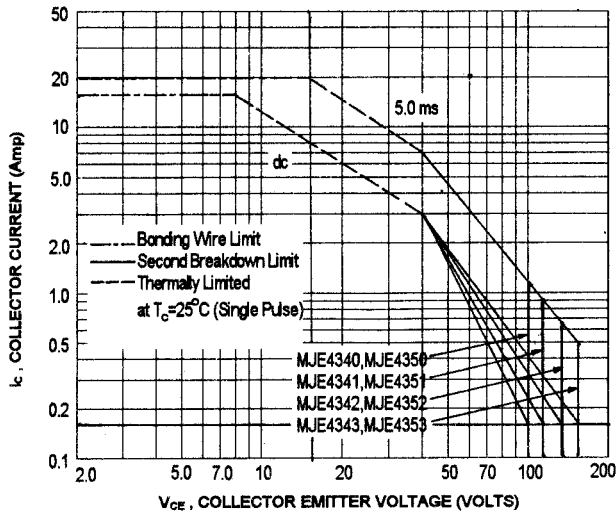

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.


The data of SOA curve is base on $T_{J(PK)} = 150^\circ\text{C}$; T_C is variable depending on conditions. second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(PK)} \leq 150^\circ\text{C}$. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS SAFE OPERATING AREA

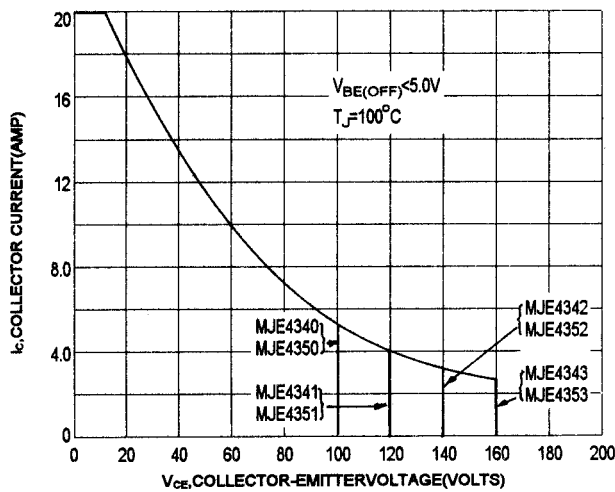

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shapping, etc. the safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Left -figure gives RBSOA characteristics.


ACTIVE-REGION SAFE OPERATING AREA (SOA)

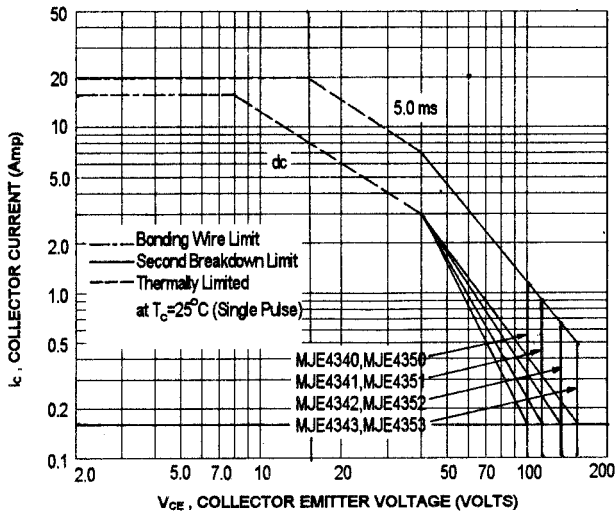

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_c - V_{ce} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of SOA curve is base on $T_{J(PK)} = 150^\circ\text{C}$; T_c is variable depending on conditions. second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(PK)} \leq 150^\circ\text{C}$. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS SAFE OPERATING AREA

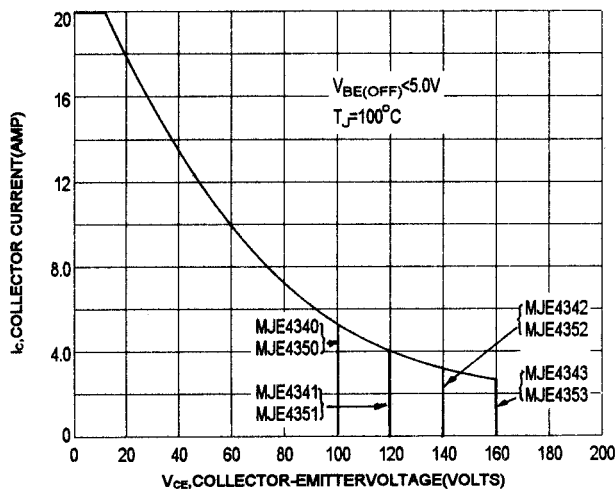

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shapping, etc. the safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Left -figure gives RBSOA characteristics.

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)