

COMPLEMENTARY SILICON HIGH-POWER TRANSISTORS

... designed for use in general purpose power amplifier and switching applications.

FEATURES:

- * Collector-Emitter Sustaining Voltage -

$V_{CE(sus)} = 40V(\text{Min})$ - TIP35, TIP36
 $60V(\text{Min})$ - TIP35A, TIP36A
 $80V(\text{Min})$ - TIP35B, TIP36B
 $100V(\text{Min})$ - TIP35C, TIP36C

- * DC Current Gain $h_{FE}=25(\text{Min})@I_C = 1.5A$


- * Current Gain-Bandwidth Product $f_T=3.0 \text{ MHz}(\text{Min})@I_C=1.0A$

MAXIMUM RATINGS

Characteristic	Symbol	TIP35 TIP36	TIP35A TIP36A	TIP35B TIP36B	TIP35C TIP36C	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	100	V
Collector-Base Voltage	V_{CBO}	40	60	80	100	V
Emitter-Base Voltage	V_{EBO}	5.0				V
Collector Current - Continuous - Peak	I_C	25 40				A
Base Current	I_B	5.0				A
Total Power Dissipation@ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	125 1.0				W W/°C
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +150				°C


THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.0	°C/W

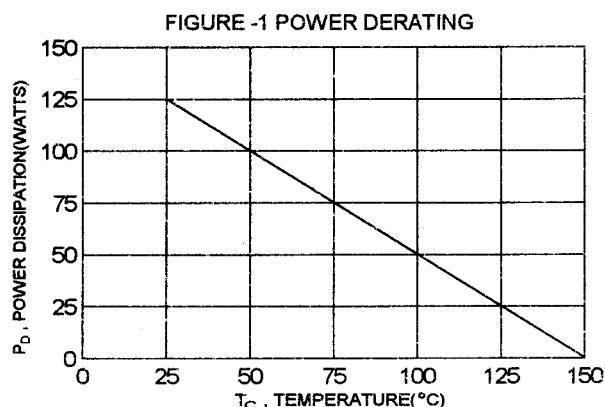


NPN	PNP
TIP35	TIP36
TIP35A	TIP36A
TIP35B	TIP36B
TIP35C	TIP36C

25 AMPERE
COMPLEMENTARY SILICON
POWER TRANSISTORS
40 -100 VOLTS
125 WATTS



TO-247(3P)



PIN 1.BASE
2.COLLECTOR
3.EMITTER

DIM	MILLIMETERS	
	MIN	MAX
A	20.63	22.38
B	15.38	16.20
C	1.90	2.70
D	5.10	6.10
E	14.81	15.22
F	11.72	12.84
G	4.20	4.50
H	1.82	2.46
I	2.92	3.23
J	0.89	1.53
K	5.26	5.66
L	18.50	21.50
M	4.68	5.36
N	2.40	2.80
O	3.25	3.65
P	0.55	0.70

TIP35, TIP35A, TIP35B, TIP35C NPN / TIP36, TIP36A, TIP36B, TIP36C PNP

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage(1) ($I_C = 30\text{ mA}$, $I_B = 0$)	TIP35, TIP36 TIP35A, TIP36A TIP35B, TIP36B TIP35C, TIP36C	$V_{CE(sus)}$	40 60 80 100	V
Collector Cutoff Current ($V_{CE} = 30\text{ V}$, $I_B = 0$) ($V_{CE} = 60\text{ V}$, $I_B = 0$)	TIP35, TIP36, TIP35A, TIP36A TIP35B, TIP36B, TIP35C, TIP36C	I_{CEO}	1.0 1.0	mA
Collector Cutoff Current ($V_{CE} = 40\text{ V}$, $V_{EB} = 0$) ($V_{CE} = 60\text{ V}$, $V_{EB} = 0$) ($V_{CE} = 80\text{ V}$, $V_{EB} = 0$) ($V_{CE} = 100\text{ V}$, $V_{EB} = 0$)	TIP35, TIP36 TIP35A, TIP36A TIP35B, TIP36B TIP35C, TIP36C	I_{CES}	0.7 0.7 0.7 0.7	mA
Emitter Cutoff Current ($V_{EB} = 5.0\text{ V}$, $I_C = 0$)		I_{EBO}	1.0	mA

ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 1.5\text{ A}$, $V_{CE} = 4.0\text{ V}$,) ($I_C = 15\text{ A}$, $V_{CE} = 4.0\text{ V}$,)	h_{FE}	25 15	75	
Collector-Emitter Saturation Voltage ($I_C = 15\text{ A}$, $I_B = 1.5\text{ A}$) ($I_C = 25\text{ A}$, $I_B = 5.0\text{ A}$)	$V_{CE(sat)}$		1.8 4.0	V
Base-Emitter On Voltage ($I_C = 15\text{ A}$, $V_{CE} = 4.0\text{ V}$) ($I_C = 25\text{ A}$, $V_{CE} = 4.0\text{ V}$)	$V_{BE(on)}$		2.0 4.0	V

DYNAMIC CHARACTERISTICS

Current Gain - Bandwidth Product (2) ($I_C = 1.0\text{ A}$, $V_{CE} = 10\text{ V}$, $f_{TEST} = 1\text{ MHz}$)	f_T	3.0		MHz
Small Signal Current Gain ($I_C = 1.0\text{ A}$, $V_{CE} = 10\text{ V}$, $f = 1\text{ kHz}$)	h_{fe}	25		

(1) Pulse Test: Pulse width $\leq 300\text{ }\mu\text{s}$, Duty Cycle $\leq 2.0\%$

(2) $f_T = |h_{fe}| \cdot f_{TEST}$

FIG-2 DC CURRENT GAIN

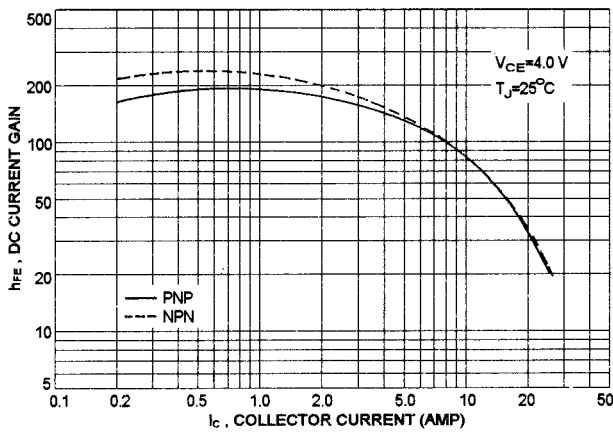


FIG-3 TURN-OFF TIME

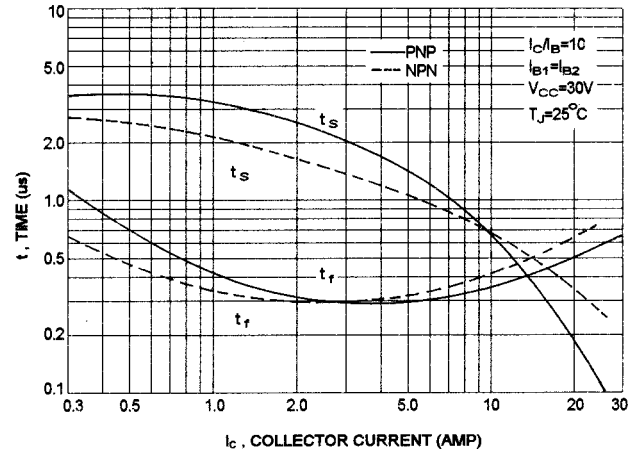


FIG-4 TURN-ON TIME

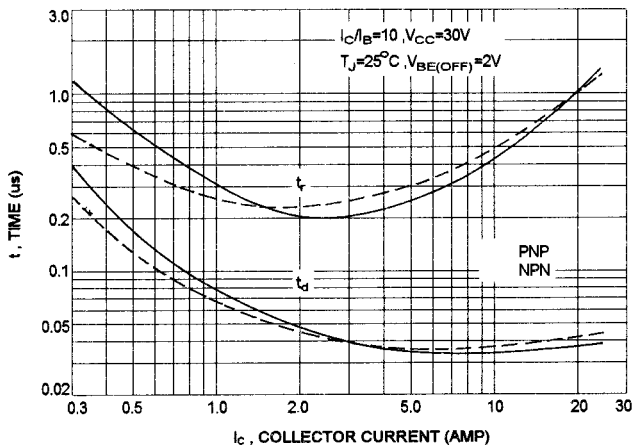


FIG-5 REVERSE BIASE SAFE OPERATING AREA


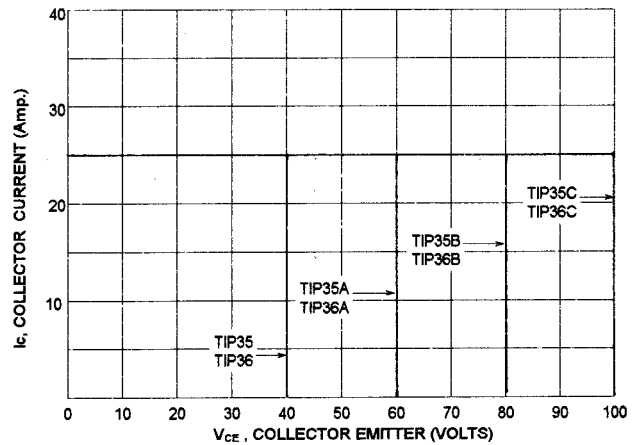


FIG-6 ACTIVE REGION SAFE OPERATING AREA

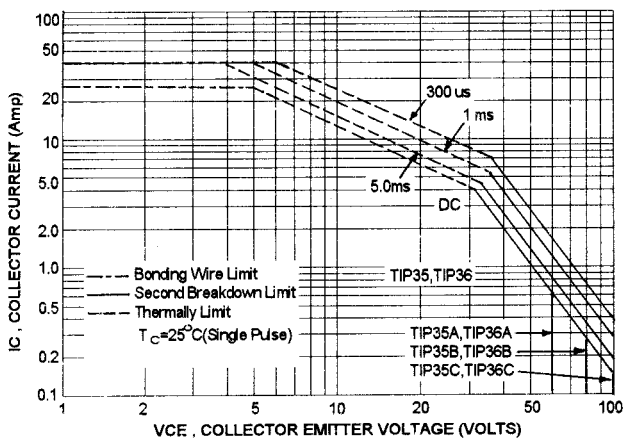

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of FIG-6 is base on $T_C = 25^\circ C$; $T_{J(PK)}$ is variable depending on power level. second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^\circ C$, second breakdown limitations do not derate the same as thermal limitation.

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)