

COMPLEMENTARY SILICON POWER TRANSISTORS

...designed for various specific and general purpose application such as; output and driver stages of amplifiers operating at frequencies from DC to greater than 1.0MHz; series, shunt and switching regulators; low and high frequency inverters/converters and many others.

FEATURES:

- * NPN Complement to D45H PNP
- * Very Low Collector Saturation Voltage
- * Excellent Linearity
- * Fast Switching
- * PNP Values are Negative, Observe Proper Polarity.


MAXIMUM RATINGS

Characteristic	Symbol	D44H1,2 D45H1,2	D44H4,5 D45H4,5	D44H7,8 D45H7,8	D44H10,11 D45H10,11	Unit
Collector-Emitter Voltage	V_{CEO}	30	45	60	80	V
Collector-Emitter Voltage	V_{CES}	30	45	60	80	V
Emitter-Base Voltage	V_{EBO}	5				V
Collector Current - Continuous Peak	I_C I_{CM}	10 20				A
Base Current	I_B	2				A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	50 0.4				W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to +150				$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta JC}$	2.5	$^\circ\text{C/W}$


FIGURE -1 POWER DERATING

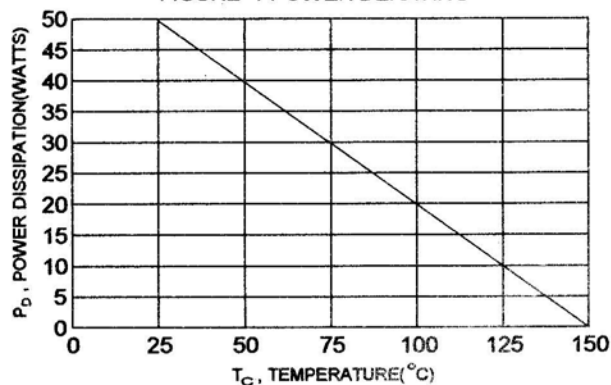


NPN
D44H
Series

PNP
D45H
Series

10 AMPERE
COMPLEMENTARY SILICON
POWER TRANSISTORS
30-80 VOLTS
50 WATTS



TO-220



PIN 1.BASE
2.COLLECTOR
3.EMITTER
4.COLLECTOR(CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	16.00
B	9.78	10.42
C	5.02	6.60
D	13.00	14.62
E	3.10	4.19
F	2.41	2.67
G	1.10	1.67
H	0.69	1.01
I	3.21	4.98
J	1.14	1.40
K	2.20	3.30
L	0.28	0.61
M	2.48	3.00
O	3.50	4.00

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage ($I_C = 30\text{mA}$, $I_B = 0$)	D44H1,2 D44H4,5 D44H7,8 D44H10,11	D45H1,2 D45H4,5 D45H7,8 D45H10,11	$V_{CE(sus)}$	30 45 60 80		V
Collector-Emitter Cutoff Current ($V_{CE} = 30\text{V}$, $V_{BE} = 0$) ($V_{CE} = 45\text{V}$, $V_{BE} = 0$) ($V_{CE} = 60\text{V}$, $V_{BE} = 0$) ($V_{CE} = 80\text{V}$, $V_{BE} = 0$)	D44H1,2 D44H4,5 D44H7,8 D44H10,11	D45H1,2 D45H4,5 D45H7,8 D45H10,11	I_{CES}		10 10 10 10	μA
Emitter-Base Cutoff Current ($V_{BE} = 5\text{V}$, $I_C = 0$)			I_{EBO}		100	μA

ON CHARACTERISTICS(1)

DC Current Gain ($I_C = 2.0\text{A}$, $V_{CE} = 1.0\text{V}$) ($I_C = 4.0\text{A}$, $V_{CE} = 1.0\text{V}$)	D44H1,4,7,10 /D45H1,4,7,10 D44H2,5,8,11 /D45H2,5,8,11 D44H1,4,7,10 /D45H1,4,7,10 D44H2,5,8,11 /D45H2,5,8,11	h_{FE}	35 60 20 40		
Collector-Emitter Saturation Voltage ($I_C = 8.0\text{A}$, $I_B = 800\text{mA}$) ($I_C = 8.0\text{A}$, $I_B = 400\text{mA}$)	D44H1,4,7,10 /D45H1,4,7,10 D44H2,5,8,11 /D45H2,5,8,11	$V_{CE(sat)}$		1.0 1.0	V
Base-Emitter Saturation Voltage ($I_C = 8.0\text{A}$, $I_B = 800\text{mA}$)	ALL Devices	$V_{BE(sat)}$		1.5	V

DYNAMIC CHARACTERISTICS


Current-Gain Bandwidth Product (2) ($I_C = 500\text{mA}$, $V_{CE} = 10\text{V}$, $f = 0.5\text{MHz}$)	D44H Series D45H Series	f_T	15 12		MHz
Output Capacitance ($V_{CB} = 10\text{V}$, $I_E = 0$, $f = 1.0\text{MHz}$)	D44H Series D45H Series	C_{ob}	220 400		PF

SWITCHING CHARACTERISTICS


Rise Time	$I_C = 5\text{A}$, $I_{B1} = -I_{B2} = 500\text{mA}$	D44H Series D45H Series	t_r		0.5 0.6	μs
Storage Time		D44H Series D45H Series	t_s		1.0 1.2	μs
Fall Time		D44H Series D45H Series	t_f		0.4 0.5	μs

(1) Pulse Test: Pulse width = 300 μs , Duty Cycle $\leq 2.0\%$ (2) $f_T = |h_{fe}| \cdot f_{\text{test}}$


DC CURRENT GAIN

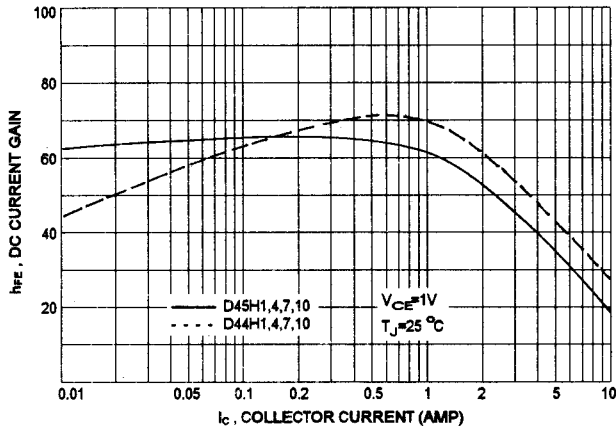


DC CURRENT GAIN

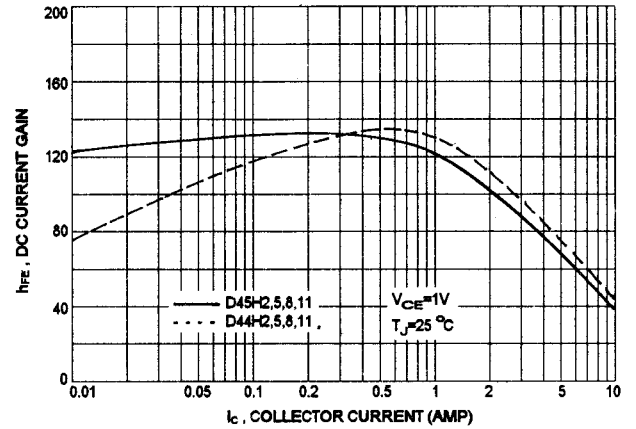


"ON" VOLTAGES

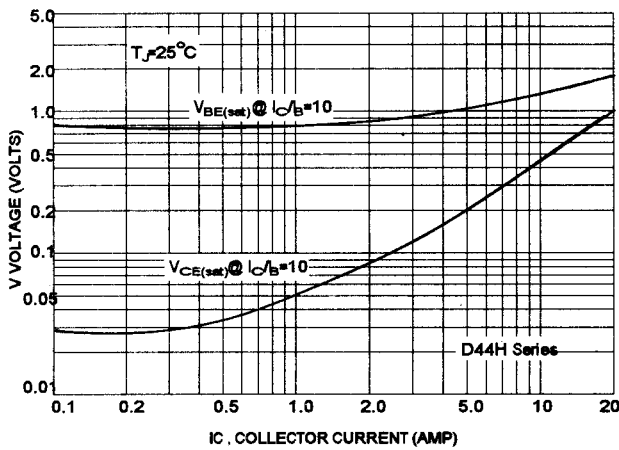

"ON" VOLTAGES

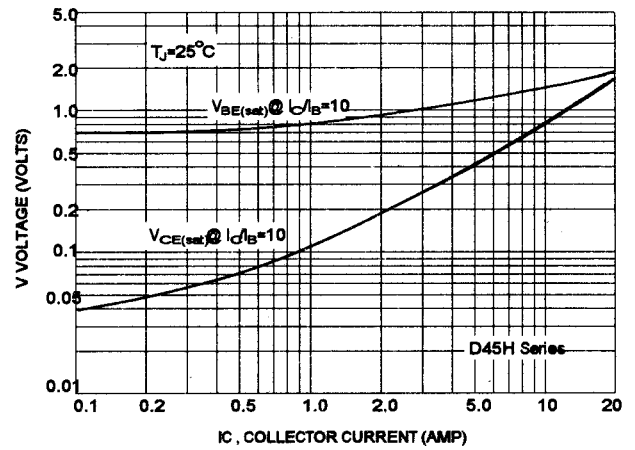

FORWARD BIAS SAFE OPERATING AREA

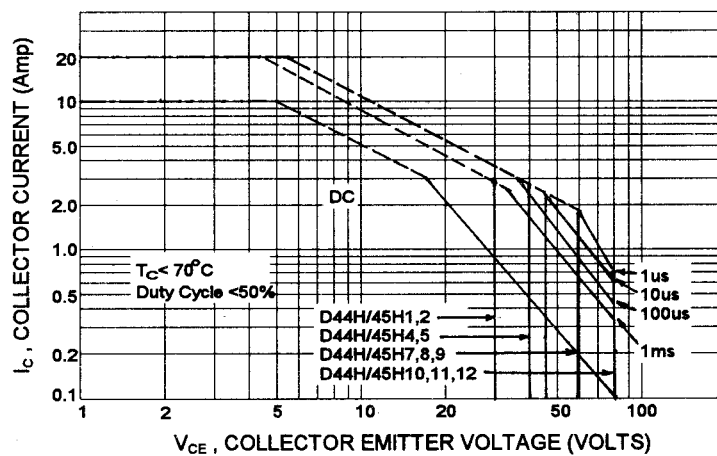

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)