

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

... designed for low power amplifier and low current, high speed switching applications.

FEATURES:

* Collector-Emitter Sustaining Voltage-

$V_{CEO(SUS)} = 40 \text{ V (Min) - MJE170, MJE180}$

$= 60 \text{ V (Min) - MJE171, MJE181}$

$= 80 \text{ V (Min) - MJE172, MJE182}$

* DC Current Gain-

$hFE = 30(\text{Min}) @ I_C = 0.5 \text{ A}$

$= 12(\text{Min}) @ I_C = 1.5 \text{ A}$


MAXIMUM RATINGS

Characteristic	Symbol	MJE170 MJE180	MJE171 MJE181	MJE172 MJE182	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	V
Collector-Base Voltage	V_{CBO}	60	80	100	V
Emitter-Base Voltage	V_{EBO}	7.0			V
Collector Current - Continuous - Peak	I_C	3.0 6.0			A
Base Current	I_B	1.0			A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	12.5 0.10			W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +150			$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	10	$^\circ\text{C/W}$

FIGURE -1 POWER DERATING

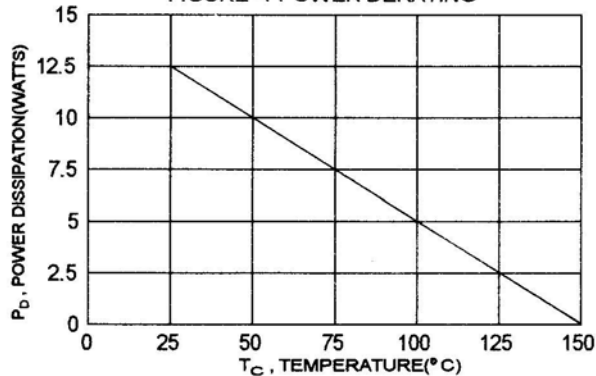

PNP

MJE170

MJE171

MJE172

NPN

MJE180


MJE181

MJE182

3.0 AMPERE
COMPLEMENTARY SILICON
POWER TRANSISTORS
40-80 Volts
12.5 Watts



TO-220



PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR(CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	16.00
B	9.78	10.42
C	5.02	6.60
D	13.00	14.62
E	3.10	4.19
F	2.41	2.67
G	1.10	1.67
H	0.69	1.01
I	3.21	4.98
J	1.14	1.40
K	2.20	3.30
L	0.28	0.61
M	2.48	3.00
O	3.50	4.00

MJE170, MJE171, MJE172 PNP / MJE180, MJE181, MJE182 NPN

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector - Emitter Sustaining Voltage (1) ($I_c = 10\text{ mA}$, $I_B = 0$)	MJE170,MJE180 MJE171,MJE181 MJE172,MJE182	$V_{CEO(SUS)}$	40 60 80	V
Collector Cutoff Current ($V_{CE} = 60\text{ V}$, $I_E = 0$) ($V_{CE} = 80\text{ V}$, $I_E = 0$) ($V_{CE} = 100\text{ V}$, $I_E = 0$) ($V_{CE} = 60\text{ V}$, $I_E = 0$, $T_c = 150^\circ\text{C}$) ($V_{CE} = 80\text{ V}$, $I_E = 0$, $T_c = 150^\circ\text{C}$) ($V_{CE} = 100\text{ V}$, $I_E = 0$, $T_c = 150^\circ\text{C}$)	MJE170,MJE180 MJE171,MJE181 MJE172,MJE182 MJE170,MJE180 MJE171,MJE181 MJE172,MJE182	I_{CBO}	10 10 10 100 100 100	μA
Emitter Cutoff Current ($V_{EB} = 7.0\text{ V}$, $I_C = 0$)		I_{EBO}	10	μA

ON CHARACTERISTICS (1)

DC Current Gain ($I_c = 100\text{ mA}$, $V_{CE} = 1.0\text{ V}$) ($I_c = 500\text{ mA}$, $V_{CE} = 1.0\text{ V}$) ($I_c = 1.5\text{ A}$, $V_{CE} = 1.0\text{ V}$)	h_{FE}	50 30 12	250	
Collector-Emitter Saturation Voltage ($I_c = 500\text{ mA}$, $I_B = 50\text{ mA}$) ($I_c = 1.5\text{ A}$, $I_B = 150\text{ mA}$) ($I_c = 3.0\text{ A}$, $I_B = 600\text{ mA}$)	$V_{CE(sat)}$		0.3 0.9 1.7	V
Base-Emitter Saturation Voltage ($I_c = 1.5\text{ A}$, $I_B = 150\text{ mA}$) ($I_c = 3.0\text{ A}$, $I_B = 600\text{ mA}$)	$V_{BE(sat)}$		1.5 2.0	V
Base-Emitter On Voltage ($I_c = 500\text{ mA}$, $V_{CE} = 1.0\text{ V}$)	$V_{BE(on)}$		1.2	V

DYNAMIC CHARACTERISTICS

Current-Gain-Bandwidth Product (2) ($I_c = 100\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 10\text{ MHz}$)	f_T	50		MHz
Output Capacitance ($V_{CB} = 10\text{ V}$, $I_E = 0$, $f = 0.1\text{ MHz}$)	C_{ob}		60 50	pF

(1) Pulse Test: Pulse width = 300 μs , Duty Cycle $\leq 2.0\%$

(2) $f_T = |h_{re}| \cdot f_{test}$

FIGURE 2 - SWITCHING TIME TEST CIRCUIT

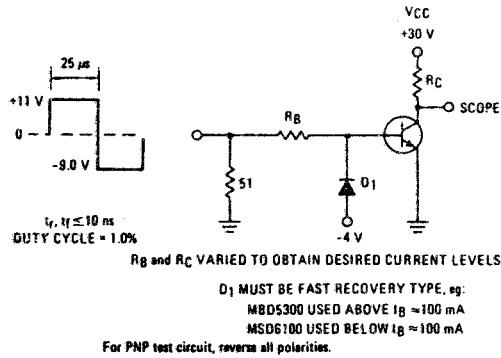


FIG-3 TURN-ON TIME

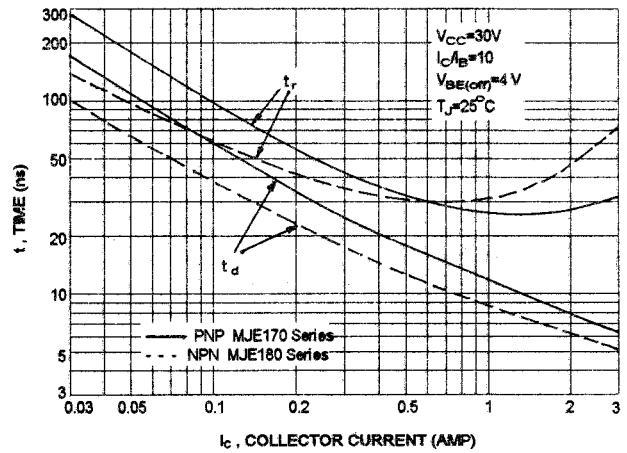


FIG-4 TURN-OFF TIME

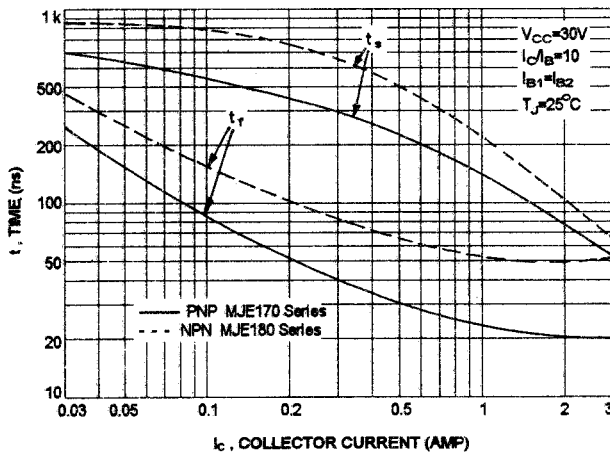


FIG-5 ACTIVE REGION SAFE OPERATING AREA


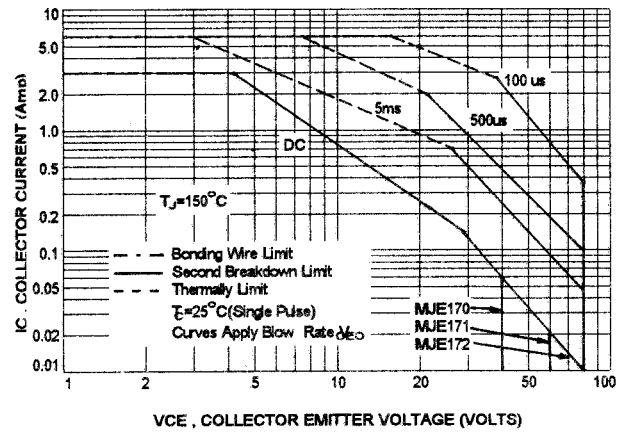


FIG-6 ACTIVE REGION SAFE OPERATING AREA

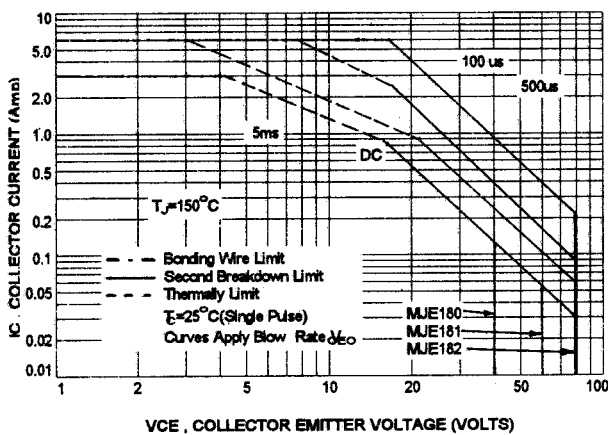

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.



The data of Fig-5 and Fig-6 is base on $T_{J(PK)}=150^\circ\text{C}$; T_C is variable depending on conditions. second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(PK)} \leq 150^\circ\text{C}$. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

MJE170, MJE171, MJ172 PNP / MJE180, MJE181, MJE182 NPN

PNP MJE170, MJE171, MJE172

FIG-7 DC CURRENT GAIN



NPN MJE180, MJE181, MJE182

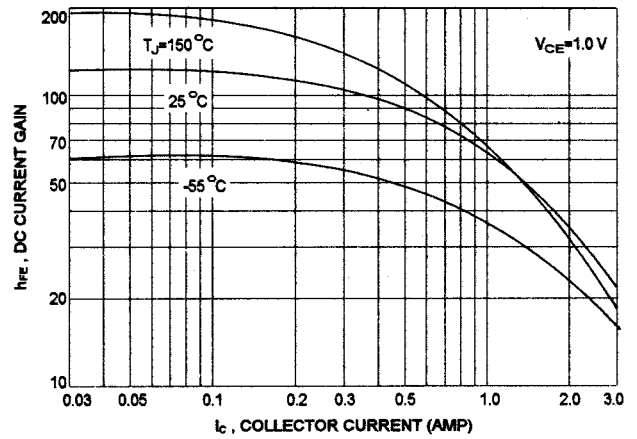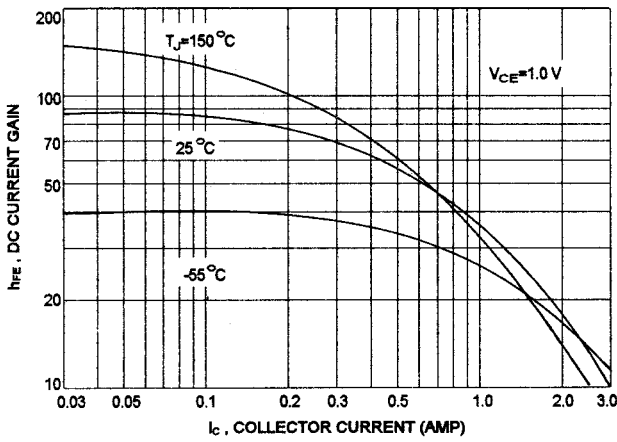

PNP MJE170, MJE171, MJE172

FIG-8 "ON" VOLTAGE



NPN MJE180, MJE181, MJE182

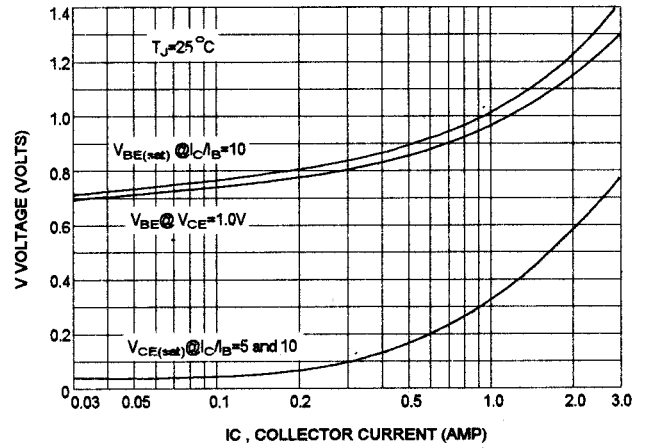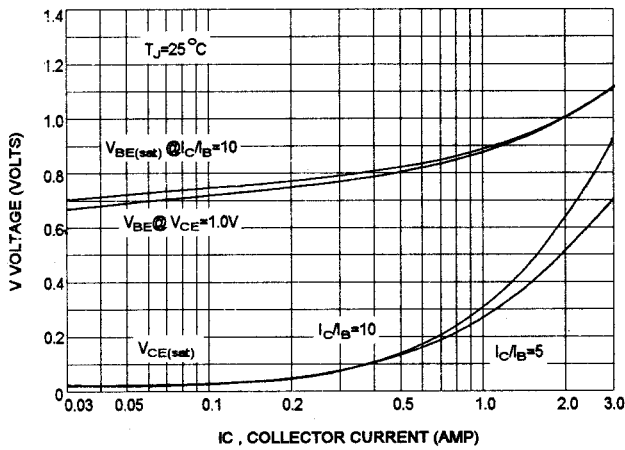

PNP MJE170, MJE171, MJE172

FIG-9 CAPACITANCE

NPN MJE180, MJE181, MJE182

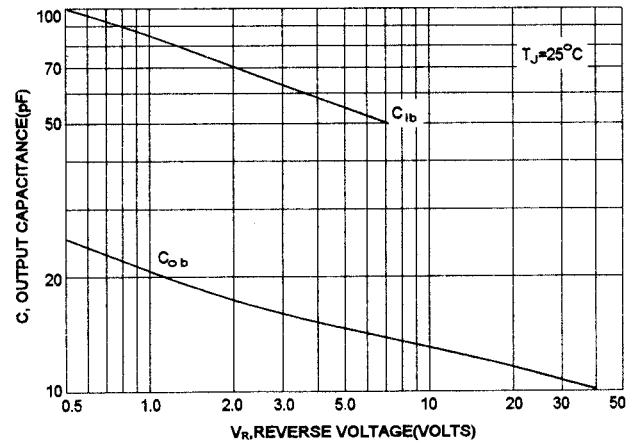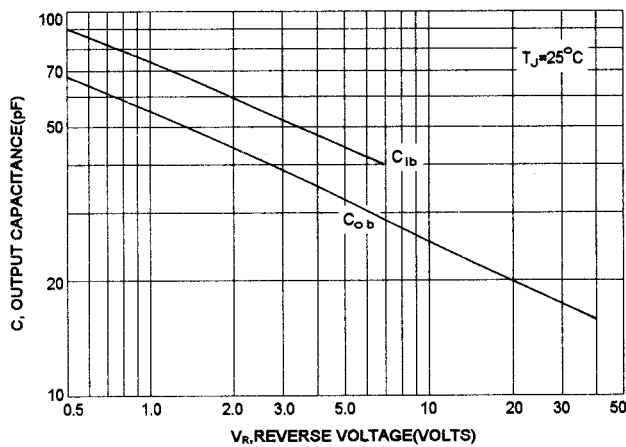

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)