

Switchmode Full Plastic Dual Schottky Barrier Power Rectifiers

Using the Schottky Barrier principle with a Molybdenum barrier metal. These state-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes.

Features

- * Low Forward Voltage.
- * Low Switching noise.
- * High Current Capacity
- * Guarantee Reverse Avalanche.
- * Guard-Ring for Stress Protection.
- * Low Power Loss & High efficiency.
- * 175 Operating Junction Temperature
- * Low Stored Charge Majority Carrier Conduction.
- * Plastic Material used Carries Underwriters Laboratory

Mechanical Data


- * Case :JEDEC TO-220AB molded plastic body
- * Terminals:Plated lead,solderable per MIL-STD-750, Method 2026
- * Polarity:As marked
- * Mounting Torque: 5 in-lbs. max
- * Weight:1.7 g approx.
- * High temperature soldering guaranteed 260 /10 seconds




Plating pb free is indicated by box

SCHOTTKY BARRIER RECTIFIERS

**10 AMPERES
30-60 VOLTS**



TO-220AB

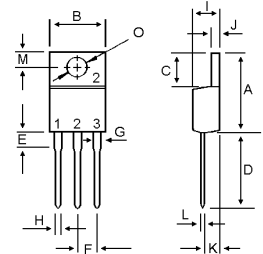


MAXIMUM RATINGS

Characteristic	Symbol	MBR10						Unit
		30CT	35CT	40CT	45CT	50CT	60CT	
Peak Repetitive Reverse Voltage	V_{RRM}							V
Working Peak Reverse Voltage	V_{RWM}	30	35	40	45	50	60	
DC Blocking Voltage	V_R							
RMS Reverse Voltage	$V_{R(RMS)}$	21	25	28	32	35	42	V
Average Rectifier Forward Current	$I_{F(AV)}$	5.0						A
Total Device (Rated V_R , $T_C=100$)		10						
Peak Repetitive Forward Current	I_{FM}	10						A
(Rate V_R , Square Wave, 20kHz)								
Non-Repetitive Peak Surge Current	I_{FSM}	100						A
(Surge applied at rate load conditions halfwave, single phase, 60Hz)								
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +175						

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.32
B	9.78	10.42
C	5.02	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	2.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.98
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

ELECTRIAL CHARACTERISTICS

Characteristic	Symbol	MBR10						Unit
		30CT	35CT	40CT	45CT	50CT	60CT	
Maximum Instantaneous Forward Voltage ($I_F=5$ Amp $T_C=25$) ($I_F=5$ Amp $T_C=125$)	V_F		0.65			0.75		V
			0.56			0.65		
Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C=25$) (Rated DC Voltage, $T_C=125$)	I_R			0.01				mA
				20				
Typical Thermal Resistance junction to case	$R_{\theta jc}$			2.8				/w



Common cathode
Suffix "C"

MBR1030CT Thru MBR1060CT

FIG-1 FORWARD CURRENT DERATING CURVE

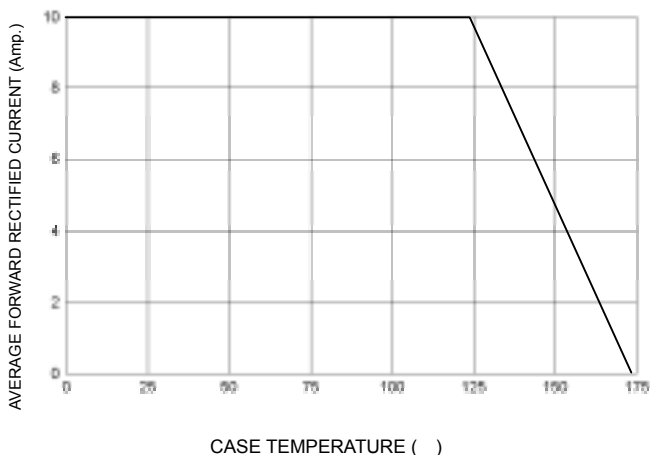


FIG-2 TYPICAL FORWARD CHARACTERISTICS

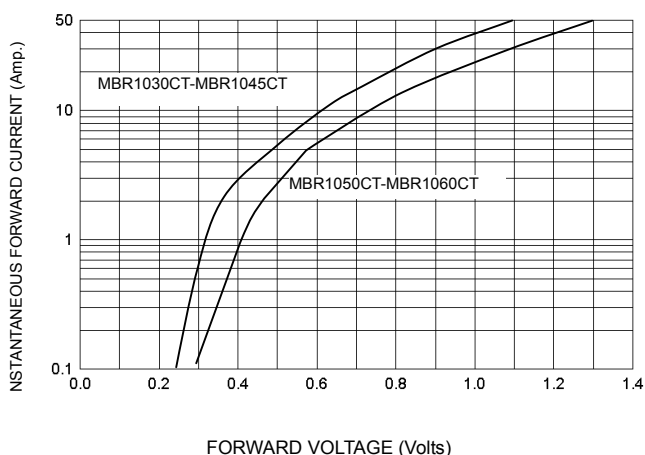


FIG-3 TYPICAL REVERSE CHARACTERISTICS

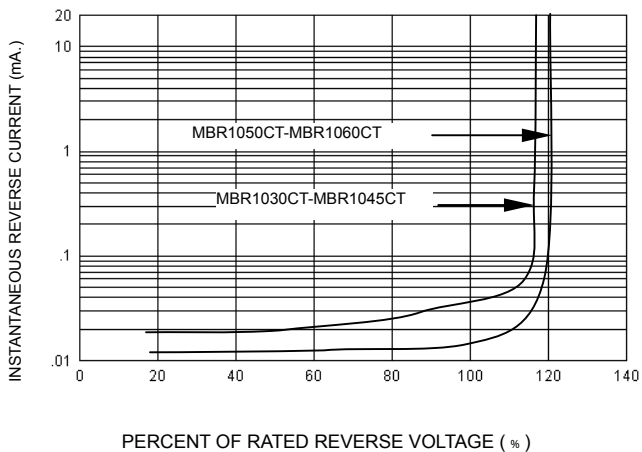


FIG-4 TYPICAL JUNCTION CAPACITANCE


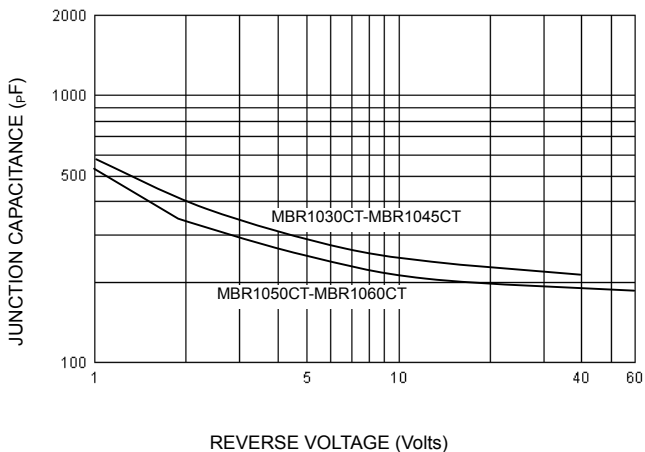


FIG-5 PEAK FORWARD SURGE CURRENT

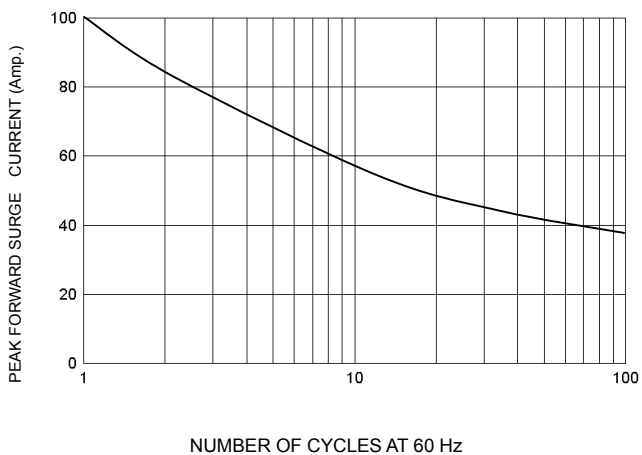

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)