


**ULTRA-FAST PLASTIC RECTIFIER**  
**VOLTAGE RANGE 50 TO 1000 Volts**  
**CURRENT 3.0 Ampere**

### FEATURES

- \* Ultra-fast recovery time for high efficiency
- \* Glass Passivated Chip junction
- \* Excellent high temperature switching
- \* Low reverse leakage current
- \* Low forward voltage drop
- \* High current capability

### MECHANICAL DATA

- \* Case : JEDEC DO-15ic
- \* Epoxy: UL94V-O rate flame retardant
- \* Terminals : Solderable Per MIL-STD-202 Method 208
- \* Polarity : Color band denotes cathode end
- \* Mounting position: Any
- \* Weight : 0.015 ounces,0.4 grams

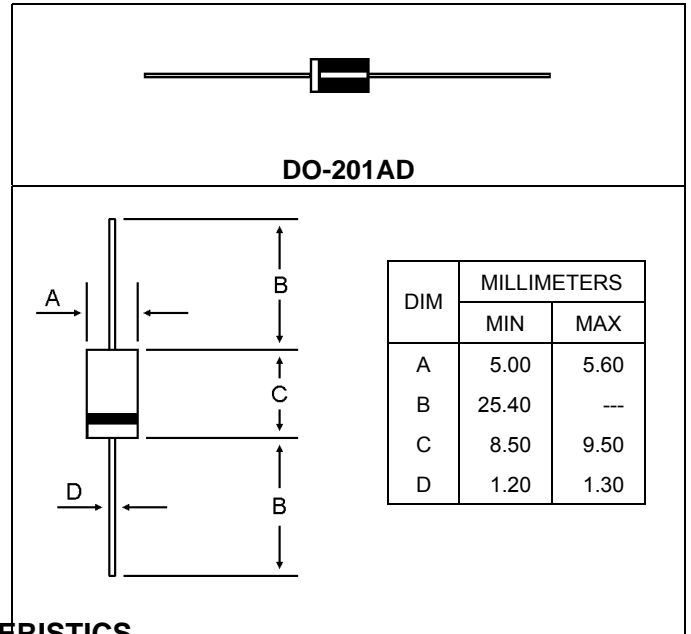

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- \* Rating at 25 °C ambient temperature unless otherwise specified
- \* Single phase, half wave, 60Hz, resistive or inductive load.
- \* For capacitive load derate current by 20 %

Characteristic	Symbol	UF	UF	UF	UF	UF	UF	UF	UF	UF	Unit
		5400	5401	5402	5403	5404	5405	5406	5407	5408	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	50	100	200	300	400	500	600	800	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	210	280	350	420	560	700	V
Average Rectifier Forward Current Per Leg $T_C=55$	$I_{F(AV)}$	3.0									A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfwave, single phase, 60Hz)	$I_{FSM}$	150									A
Maximum Instantaneous Forward Voltage ( $I_F=3.0$ Amp $T_C=25$ °C)	$V_F$	1.0			1.7					V	
Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C=25$ °C) (Rated DC Voltage, $T_C=100$ °C)	$I_R$	10 75			10 200					µA	
Reverse Recovery Time ( $I_F=0.5$ A, $I_R=1.0$ A, $I_{rr}=0.25$ A)	$T_{rr}$	50			75					ns	
Typical Junction Capacitance (Reverse Voltage of 4 volts & f=1 MHz)	$C_j$	45			36					pF	
Typical Thermal Resistance (1)	$R_{\theta Ja}$ $R_{\theta Jc}$	20 8.5									/W
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	-65 to +150									

Notes:

- (1) Thermal resistance from junction to lead and from junction to ambient with 0.375" (9.5mm) lead length, both leads attached to heatsink

# UF5400 Thru UF5408

FIG-1 TYPICAL FORWARD CHARACTERISTICS

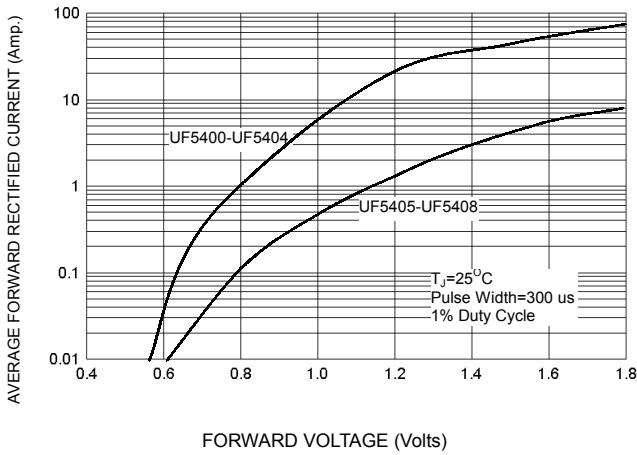


FIG-3 FORWARD CURRENT DERATING CURVE

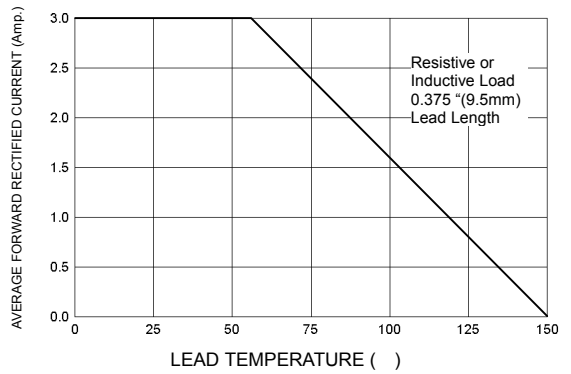


FIG-2 TYPICAL REVERSE CHARACTERISTICS

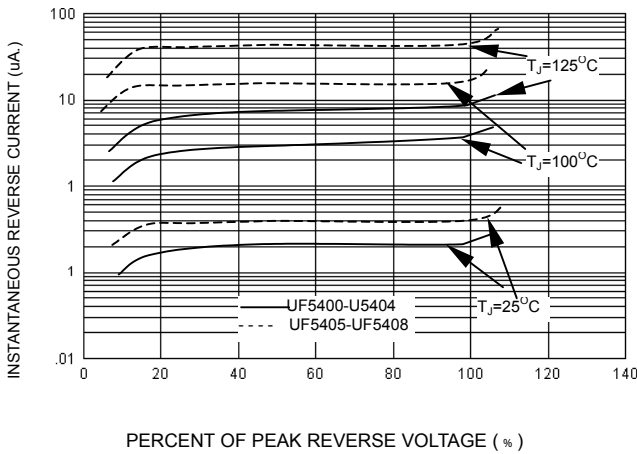


FIG-4 TYPICAL JUNCTION CAPACITANCE




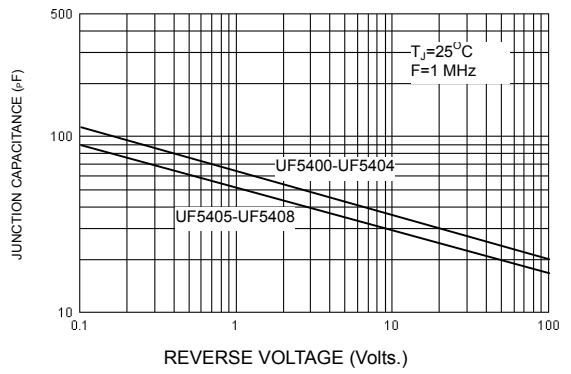


FIG-5 PEAK FORWARD SURGE CURRENT

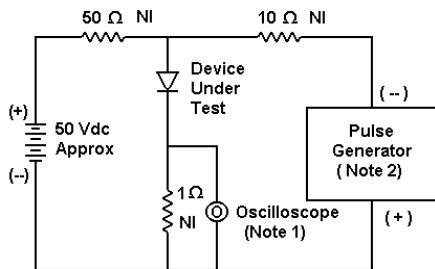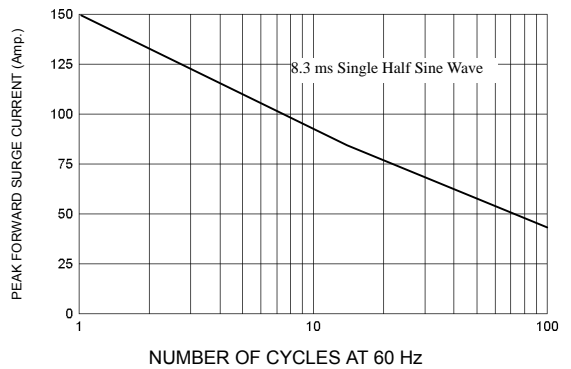

- Notes:  
 1. Rise Time = 7 ns max. Input Impedance = 1 M  $\Omega$ , 22 pF  
 2. Rise Time = 10 ns max. Input Impedance = 50  $\Omega$


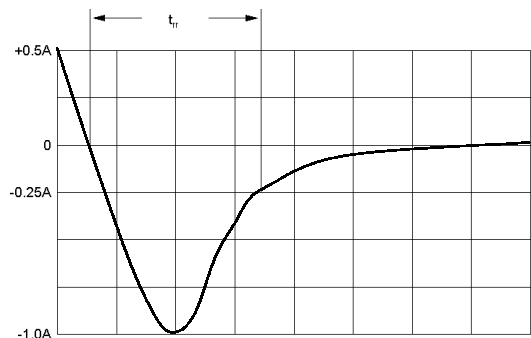


Set time base for 10/20 ns/cm

FIG-6 Reverse Recovery Time Characteristic and Test Circuit Diagram

22C-426

Unit:mm

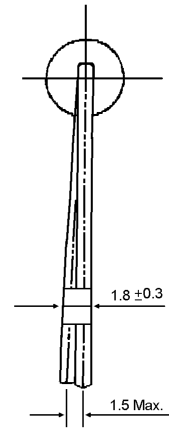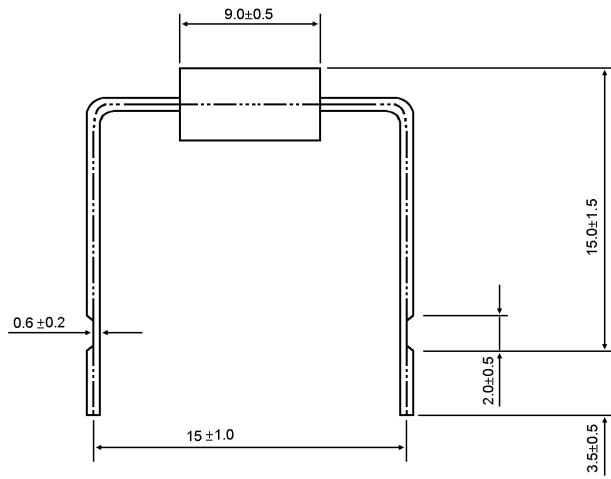

## Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life ( atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)