

Surface Mount Transient Voltage Suppressors

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting, especially for automotive load dump protection application.

FEATURES :

- Junction passivated by high temperature resistant insulating adhesive
- $T_J = 175\text{ °C}$ capability suitable for high reliability and automotive requirement
- Available in Uni-directional polarity only
- Low leakage current
- Low forward voltage drop
- High surge capability
- Meets ISO 7637-2 surge specification (varied by test condition)
- Meets MSL level 1 · LF maximum peak of 245 °C
- AEC-Q101 qualified
- RoHS compliant.



DO-218AB

MECHANICAL DATA :

Case: DO-218AB

Molding compound meets UL 94 V-0 flammability rating Base P/NHE3_X - RoHS-compliant and AEC-Q101 qualified ("X" denotes revision code e.g. A, B, ...)

Terminals : matte tin plated leads, solderable per J-STD-002 and JESD 22-B102

Polarity: heatsink is anode

MAXIMUM RATINGS ($T_c=25\text{ °C}$ unless otherwise specified)

Characteristic	Condition	Symbol	Value	Unit
Peak pulse power dissipation	with 10/1000 μs waveform with 10/10000 μs waveform	P_{PPM}	6600 5200	W
Power dissipation on infinite heatsink	At $T_c = 25\text{ °C}$ (fig. 1)	P_D	8.0	W
Peak pulse current with 10/1000 μs waveform		$I_{PPM}^{(1)}$	See next table	A
Peak forward surge current 8.3 ms single half sine-wave		I_{FSM}	700	A
Operating junction and storage temperature range		T_J, T_{STG}	-55~+175	°C

Note

(1) Non-repetitive current pulse derated above $T_A = 25\text{ °C}$

SM8S10A thru SM8S43A

ELECTRICAL CHARACTERISTICS (T_c = 25 °C unless otherwise noted)

DEVICE TYPE	BREAKDOWN VOLTAGE V _{BR} (V)			TEST CURRENT I _T (mA)	STAND-OFF VOLTAGE V _{WM} (V)	MAXIMUM REVERSE LEAKAGE AT V _{WM} I _D (μA)	MAXIMUM REVERSE LEAKAGE AT V _{WM} T _J = 175 °C, I _D (μA)	MAX. PEAK PULSE CURRENT AT 10/1000 μs WAVEFORM (A)	MAXIMUM CLAMPING VOLTAGE AT I _{PPM} V _C (V)	TYPICAL TEMP. COEFFICIENT OF V _{BR} ⁽¹⁾ α T (%/°C)
	MIN.	NOM.	MAX.							
SM8S10A	11.1	11.7	12.3	5.0	10.0	10	150	388	17.0	0.069
SM8S11A	12.2	12.9	13.5	5.0	11.0	10	150	363	18.2	0.072
SM8S12A	13.3	14.0	14.7	5.0	12.0	10	150	332	19.9	0.074
SM8S13A	14.4	15.2	15.9	5.0	13.0	10	150	307	21.5	0.076
SM8S14A	15.6	16.4	17.2	5.0	14.0	10	150	284	23.2	0.078
SM8S15A	16.7	17.6	18.5	5.0	15.0	10	150	270	24.4	0.080
SM8S16A	17.8	18.8	19.7	5.0	16.0	10	150	254	26.0	0.081
SM8S17A	18.9	19.9	20.9	5.0	17.0	10	150	239	27.6	0.082
SM8S18A	20.0	21.1	22.1	5.0	18.0	10	150	226	29.2	0.083
SM8S20A	22.2	23.4	24.5	5.0	20.0	10	150	204	32.4	0.085
SM8S22A	24.4	25.7	26.9	5.0	22.0	10	150	186	35.5	0.086
SM8S24A	26.7	28.1	29.5	5.0	24.0	10	150	170	38.9	0.087
SM8S26A	28.9	30.4	31.9	5.0	26.0	10	150	157	42.1	0.088
SM8S28A	31.1	32.8	34.4	5.0	28.0	10	150	145	45.4	0.089
SM8S30A	33.3	35.1	36.8	5.0	30.0	10	150	136	48.4	0.090
SM8S33A	36.7	38.7	40.6	5.0	33.0	10	150	124	53.3	0.091
SM8S36A	40.0	42.1	44.2	5.0	36.0	10	150	114	58.1	0.091
SM8S40A	44.4	46.8	49.1	5.0	40.0	10	150	102	64.5	0.092
SM8S43A	47.8	50.3	52.8	5.0	43.0	10	150	95.1	69.4	0.093

Notes

- For all types maximum VF = 1.8 V at IF = 100 A measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

(1) To calculate VBR vs. junction temperature, use the following formula: V_{BR} at T_J = V_{BR} at 25 °C x (1 + α T x (T_J - 25))

RATINGS AND CHARACTERISTICS CURVES ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

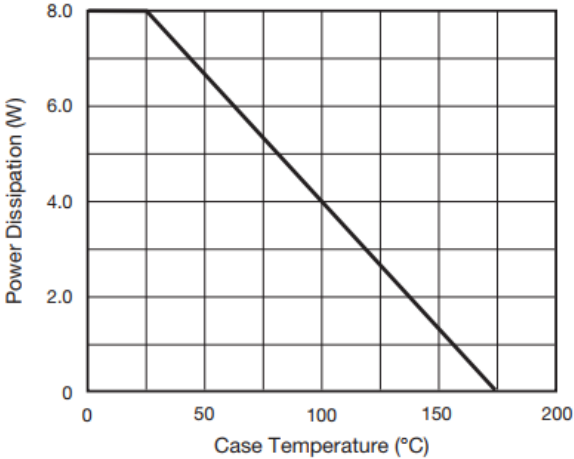


Figure 1. Power Derating Curve

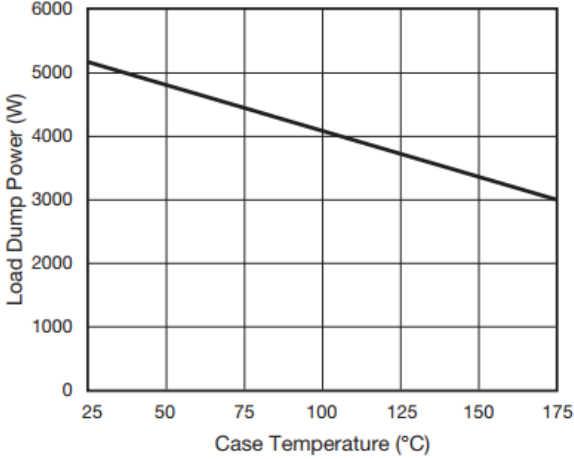


Figure 2. Load Dump Power Characteristics (10 ms Exponential Waveform)

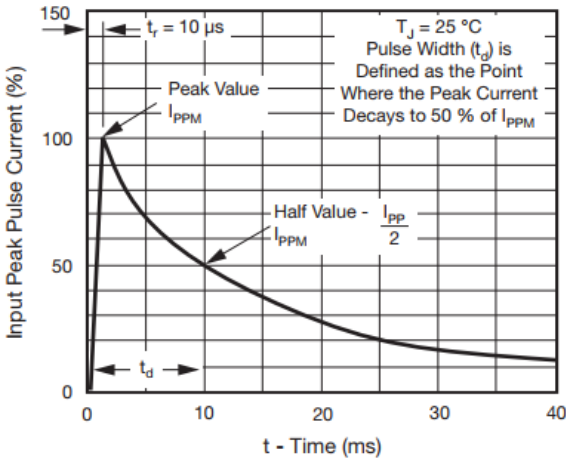


Figure 3. Pulse Waveform

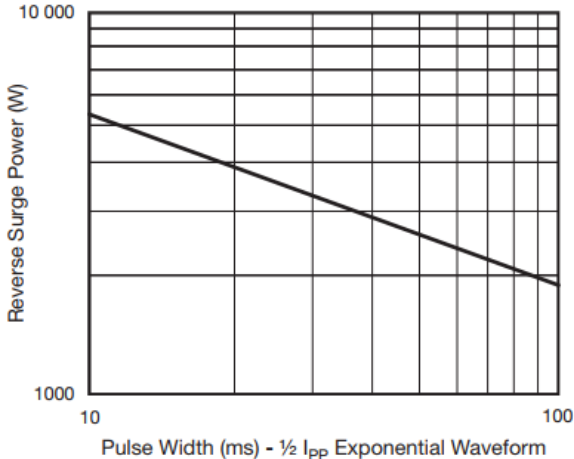


Figure 4. Reverse Power Capability

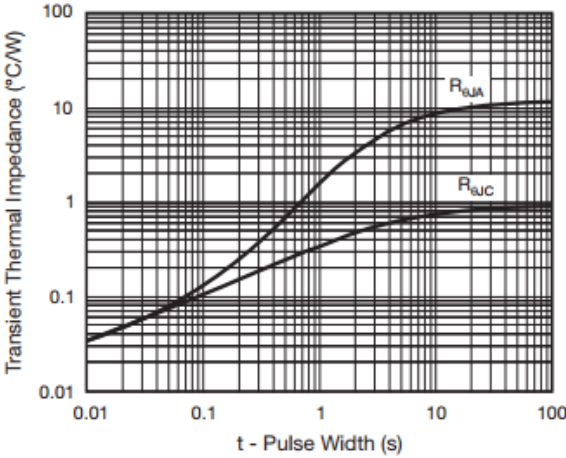


Figure 5. Typical Transient Thermal Impedance


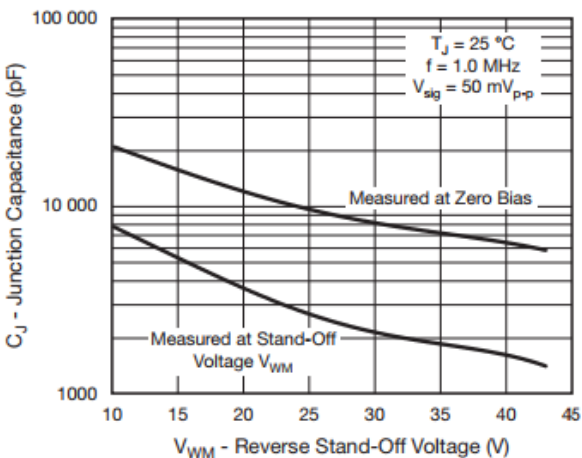




Figure 6. Typical Junction Capacitance

SM8S10A thru SM8S43A

• Package outlines : Dimensions in (mm)

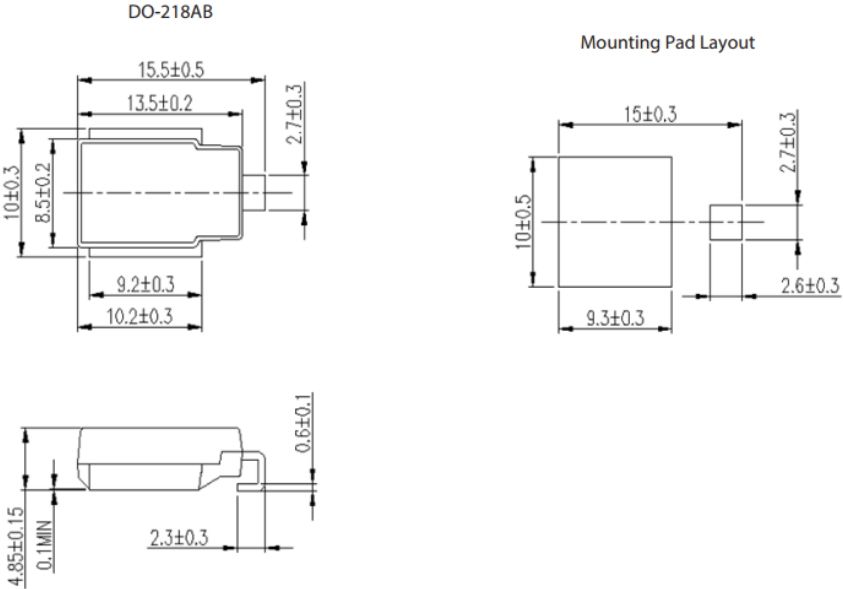

• Tape & Reel Information

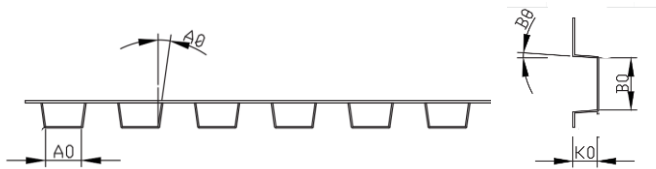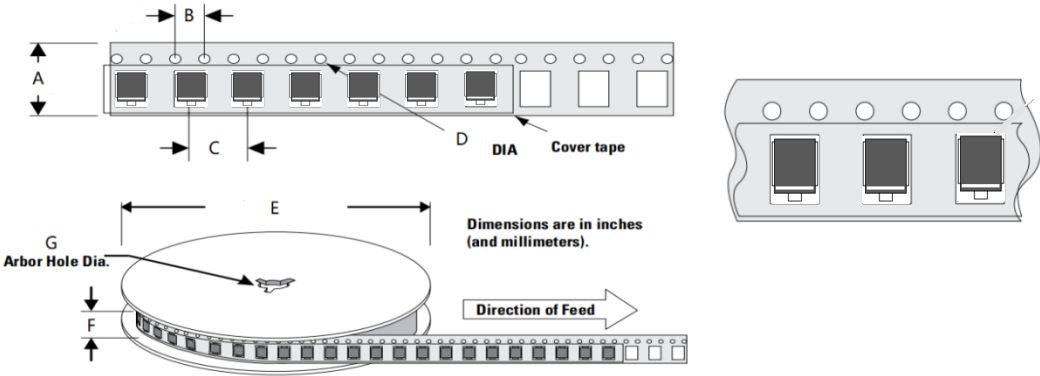

Dimensions	Millimeters	
	Min	Max
A	23.90	24.10
B	3.90	4.10
C	15.90	16.10
D	1.50	1.60
E	328.0	332.0
F	23.50	25.50
G	12.50	14.50
A0	10.42	10.62
B0	16.42	16.62
K0	5.65	5.85
Aθ	--	5°
Bθ	--	5°

Notice

MOSPEC reserves the rights to make changes of the content herein the document anytime without notification. MOSPEC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Please refer to MOSPEC website for the last document.

MOSPEC disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially incurred.

Application shown on the herein document are examples of standard use and operation. Customers are responsible for comprehending suitable use in particular applications. MOSPEC makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by MOSPEC for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MOSPEC or others.

These MOSPEC products are intended for usage in general electronic equipment. Please make sure to consult with MOSPEC before you use these MOSPEC products in equipment which require specialized quality and/or reliability, and in equipment which could have major impact to the welfare of human life (atomic energy control, aeronautics , traffic control, combustion control, safety devices etc.)