

Schottky Barrier Rectifiers


Using the Schottky Barrier principle with a Molybdenum barrier metal. These state-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes.

- * Low Forward Voltage.
- * Low Switching noise.
- * High Current Capacity
- * Guarantee Reverse Avalanche.
- * Guard-Ring for Stress Protection.
- * Low Power Loss & High efficiency.
- * 150 Operating Junction Temperature
- * Low Stored Charge Majority Carrier Conduction.
- * Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O
- * Moisture Sensitivity Level: MSL-1
- * *In compliance with EU RoHs 2002/95/EC directives*




SCHOTTKY BARRIER RECTIFIERS

**1.0 AMPERES
20-60 VOLTS**



MAXIMUM RATINGS

Characteristic	Symbol	SR102	SR103	SR104	SR105	SR106	Unit
Peak Repetitive Reverse Voltage	V_{RRM}						
Working Peak Reverse Voltage	V_{RWM}	20	30	40	50	60	V
DC Blocking Voltage	V_R						
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	28	42	V
Average Rectifier Forward Current	I_O	1.0					A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions half-wave, single phase, 60Hz)	I_{FSM}	40					A
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +150					

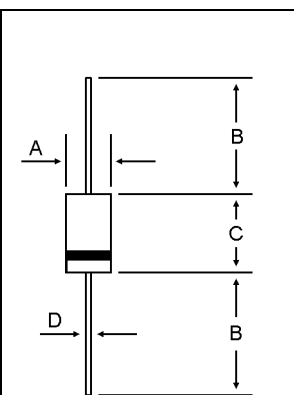

DIM	MILLIMETERS	
	MIN	MAX
A	2.00	2.70
B	25.40	---
C	4.10	5.20
D	0.70	0.90

ELECTRIAL CHARACTERISTICS

Characteristic	Symbol	SR102	SR103	SR104	SR105	SR106	Unit
Maximum Instantaneous Forward Voltage ($I_F = 1.0$ Amp) ($I_F = 3.0$ Amp)	V_F		0.550 0.750		0.700 0.850		V
Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C = 25$) (Rated DC Voltage, $T_C = 125$)	I_R			0.5 10			mA
Maximum Thermal Resistance Junction to Case	$R_{\theta JC}$			60			$^{\circ}C/W$
Typical Junction Capacitance (Reverse Voltage of 4 volts & $f=1$ MHz)	C_P		90		80		pF

CASE---
Transfer molded
plastic

POLARITY---
Cathode indicated
polarity band

SR102 Thru SR106

FIG-1 FORWARD CURRENT DERATING CURVE

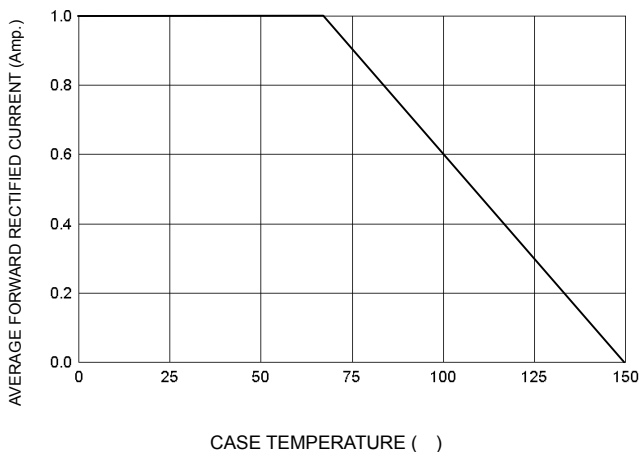


FIG-2 TYPICAL FORWARD CHARACTERISTICS

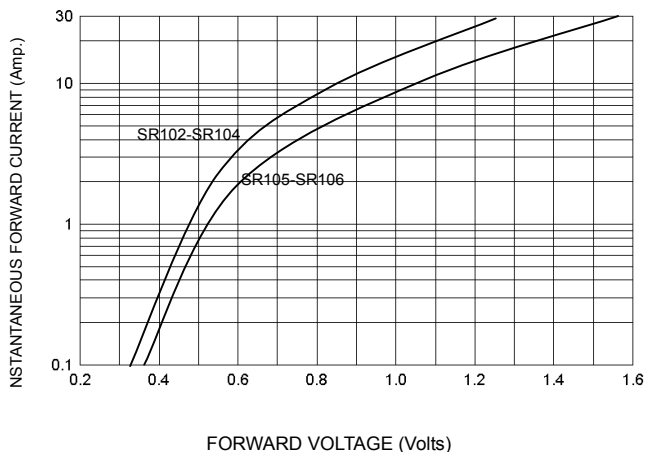


FIG-3 TYPICAL REVERSE CHARACTERISTICS

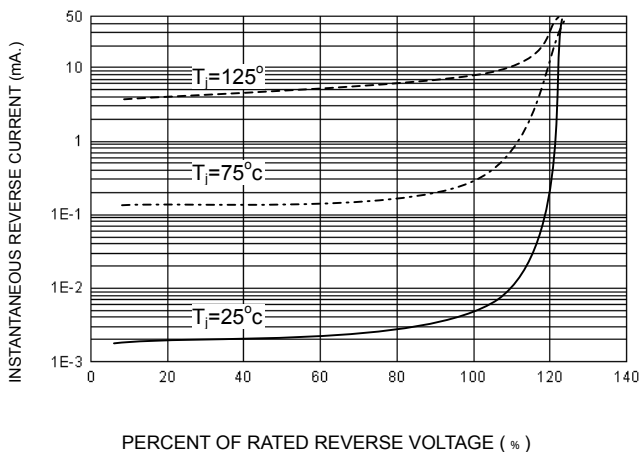


FIG-4 TYPICAL JUNCTION CAPACITANCE

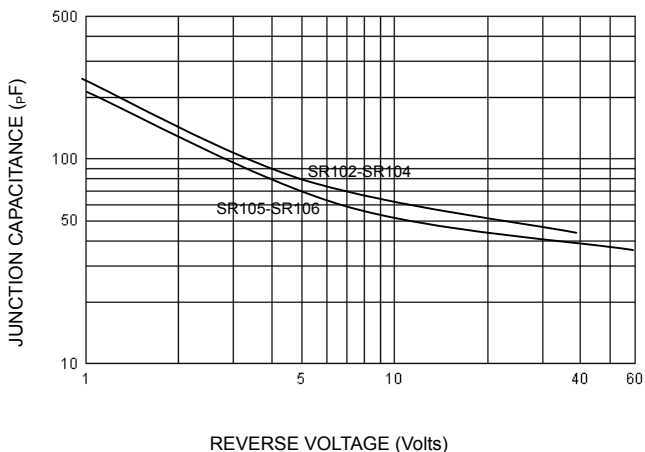


FIG-5 PEAK FORWARD SURGE CURRENT

